




PROBLEM SUMMARY

Machine Id
828018-1064

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

Sample Rating Trend

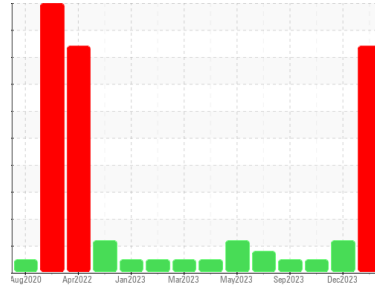


GLYCOL



COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

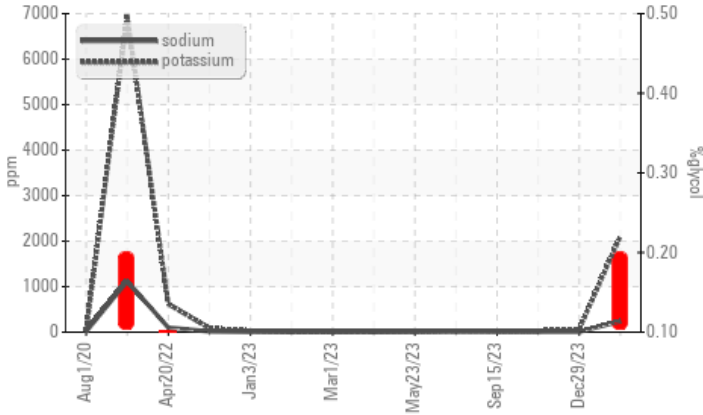

RECOMMENDATION

We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	NORMAL
Potassium	ppm	ASTM D5185m	>20	▲ 2110	▲ 64	29
Glycol	%	*ASTM D2982		▲ 0.20	NEG	NEG

Customer Id: GFL654S
Sample No.: GFL0113584
Lab Number: 06105089
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

29 Dec 2023 Diag: Jonathan Hester

GLYCOL



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



10 Oct 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



15 Sep 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

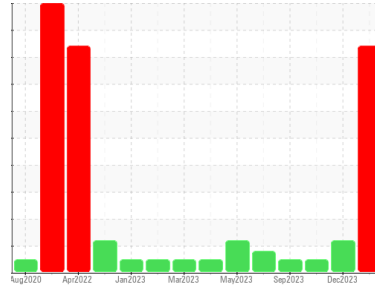

GLYCOL



Machine Id
828018-1064

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Test for glycol is positive. There is a high concentration of glycol present in the oil.

● Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0113584	GFL0103866	GFL0097361	
Sample Date	Client Info	23 Feb 2024	29 Dec 2023	10 Oct 2023	
Machine Age	hrs	Client Info	11790	11571	13826
Oil Age	hrs	Client Info	559	340	9294
Oil Changed	Client Info	Changed	N/A	N/A	
Sample Status		SEVERE	ABNORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	51	13	60
Chromium	ppm ASTM D5185m >20	2	<1	2
Nickel	ppm ASTM D5185m >4	0	0	<1
Titanium	ppm ASTM D5185m	0	0	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	6	2	7
Lead	ppm ASTM D5185m >40	<1	0	0
Copper	ppm ASTM D5185m >330	3	<1	5
Tin	ppm ASTM D5185m >15	<1	0	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	12	7	3
Barium	ppm ASTM D5185m 0	0	0	12
Molybdenum	ppm ASTM D5185m 60	257	63	63
Manganese	ppm ASTM D5185m 0	<1	<1	1
Magnesium	ppm ASTM D5185m 1010	885	925	975
Calcium	ppm ASTM D5185m 1070	1039	1056	1062
Phosphorus	ppm ASTM D5185m 1150	941	1033	991
Zinc	ppm ASTM D5185m 1270	1264	1256	1262
Sulfur	ppm ASTM D5185m 2060	2926	3075	2776

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	14	6	14
Sodium	ppm ASTM D5185m	239	8	8
Potassium	ppm ASTM D5185m >20	2110	64	29
Glycol	% *ASTM D2982	0.20	NEG	NEG

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1	0.3	1.2
Nitration	Abs/cm *ASTM D7624 >20	13.9	6.7	11.0
Sulfation	Abs/.1mm *ASTM D7415 >30	24.6	18.6	22.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.1	14.4	18.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.3	8.8	6.2







OIL ANALYSIS REPORT

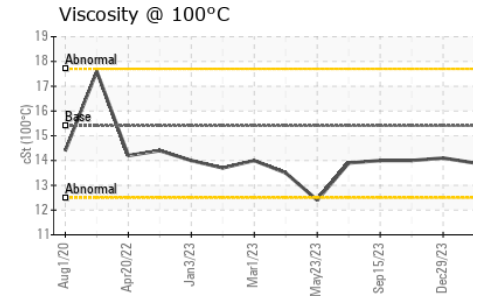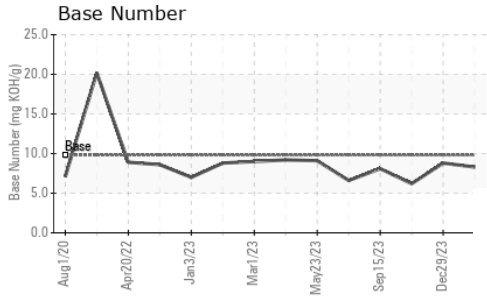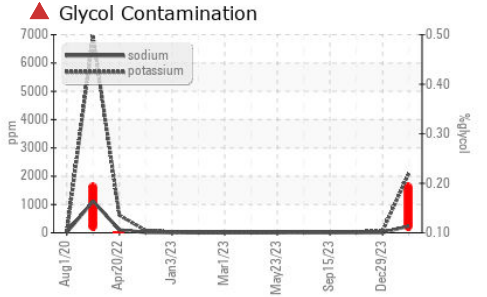

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.1

GRAPHS

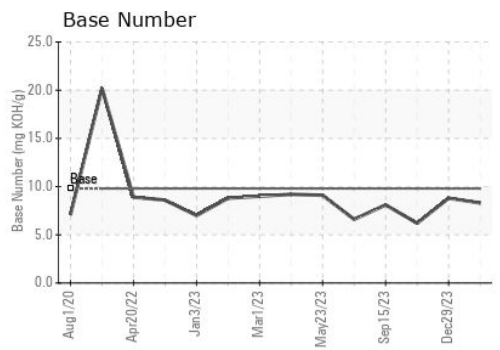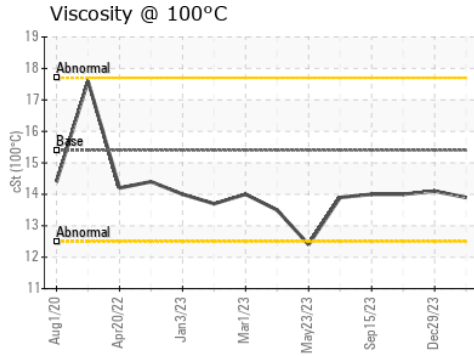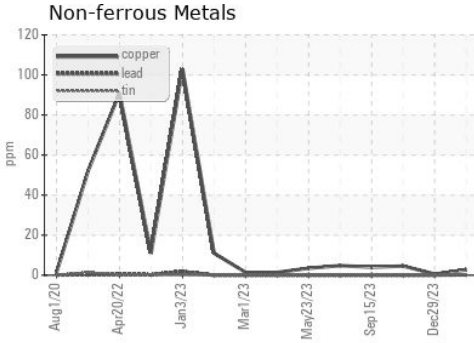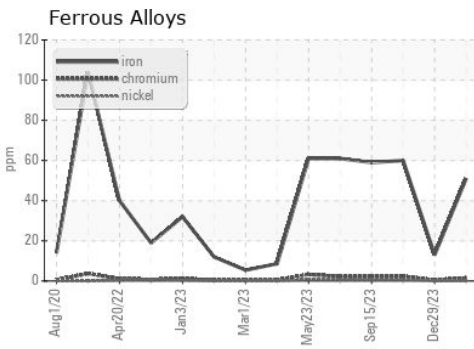

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0113584 **Received** : 29 Feb 2024
Lab Number : 06105089 **Tested** : 01 Mar 2024
Unique Number : 10903319 **Diagnosed** : 01 Mar 2024 - Wes Davis
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 654S - Midlothian
 12230 Deergrove Road
 Midlothian, VA
 US 23112
 Contact: Corbin Umphlet
 cumphlet@gflenv.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)