




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

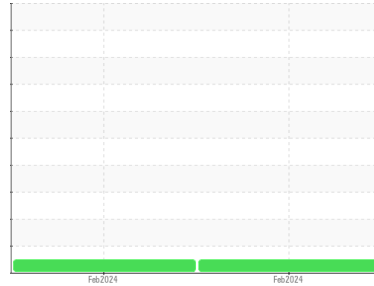

Machine Id
414074
 Component
1 Diesel Engine
 Fluid
PETRO CANADA 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0112720	GFL0112799	---
Sample Date	Client Info		23 Feb 2024	16 Feb 2024	---
Machine Age	hrs	Client Info	817	762	---
Oil Age	hrs	Client Info	817	762	---
Oil Changed	Client Info		N/A	Not Changd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	9	7	---
Chromium	ppm	ASTM D5185m >20	<1	<1	---
Nickel	ppm	ASTM D5185m >5	1	0	---
Titanium	ppm	ASTM D5185m >2	0	0	---
Silver	ppm	ASTM D5185m >2	<1	<1	---
Aluminum	ppm	ASTM D5185m >20	4	4	---
Lead	ppm	ASTM D5185m >40	<1	0	---
Copper	ppm	ASTM D5185m >330	31	43	---
Tin	ppm	ASTM D5185m >15	<1	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	12	12	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	63	60	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	918	875	---
Calcium	ppm	ASTM D5185m	1020	1000	---
Phosphorus	ppm	ASTM D5185m	1029	922	---
Zinc	ppm	ASTM D5185m	1237	1159	---
Sulfur	ppm	ASTM D5185m	3005	2733	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	10	12	---
Sodium	ppm	ASTM D5185m	9	0	---
Potassium	ppm	ASTM D5185m >20	36	0	---
Glycol	%	*ASTM D2982	NEG	NEG	---

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624 >20	6.7	6.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.9	19.4	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.2	15.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.5	---







OIL ANALYSIS REPORT

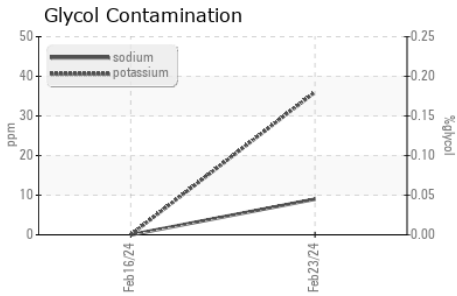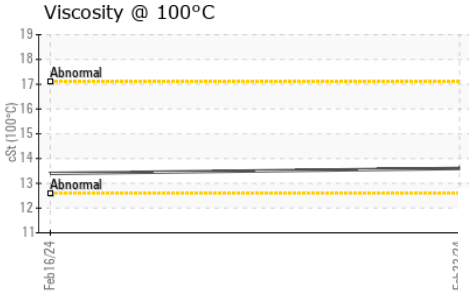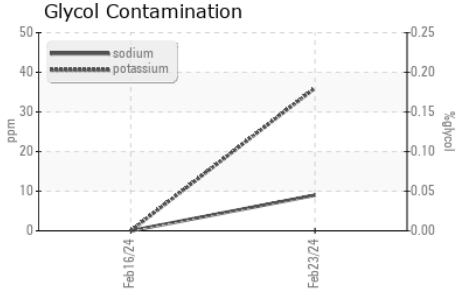

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.6	13.4	---

GRAPHS

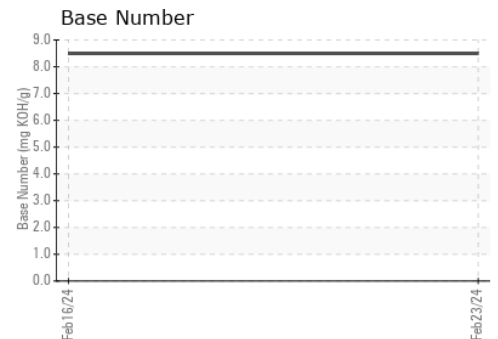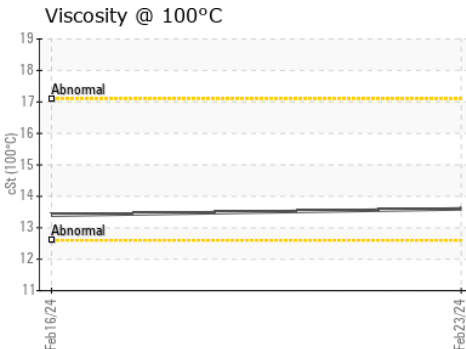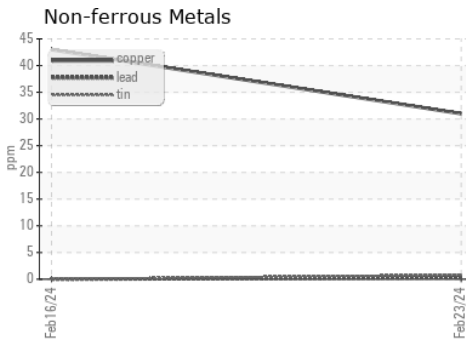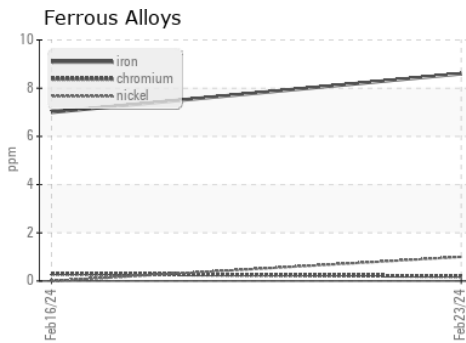

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0112720

Lab Number : 06105093

Unique Number : 10903323

Test Package : FLEET (Additional Tests: Glycol)

Received : 29 Feb 2024

Tested : 05 Mar 2024

Diagnosed : 05 Mar 2024 - Jonathan Hester

GFL Environmental - 654 - Richmond Hauling

11800 Lewis Road

Chester, VA

US 23831

Contact: Jimmy Mayes

jmayes@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)