


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

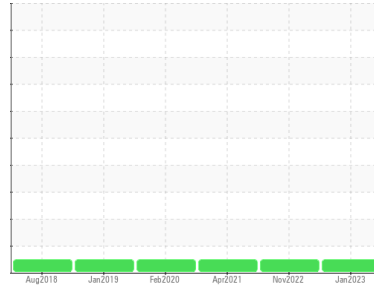

Machine Id
DT608
 Component
Transmission (Auto)
 Fluid
COGNIS EMGARD 2805 ATF (4 mls)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0089119	PCA0080513	PCA0045187
Sample Date	Client Info		25 Jan 2023	28 Nov 2022	14 Apr 2021
Machine Age	mls	Client Info	229446	191474	0
Oil Age	mls	Client Info	67481	0	0
Oil Changed	Client Info		Changed	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	82	63	67
Chromium	ppm	ASTM D5185m >5	0	<1	<1
Nickel	ppm	ASTM D5185m >5	0	<1	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >5	0	0	0
Aluminum	ppm	ASTM D5185m >50	18	12	12
Lead	ppm	ASTM D5185m >50	9	7	14
Copper	ppm	ASTM D5185m >225	68	35	20
Tin	ppm	ASTM D5185m >10	2	1	2
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0


ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	82	97	115
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	<1	2	0
Calcium	ppm	ASTM D5185m	91	90	28
Phosphorus	ppm	ASTM D5185m	246	245	276
Zinc	ppm	ASTM D5185m	9	1	5
Sulfur	ppm	ASTM D5185m	1131	1201	327
Lithium	ppm	ASTM D5185m	---	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	5	6	2
Sodium	ppm	ASTM D5185m	3	2	3
Potassium	ppm	ASTM D5185m >20	0	0	12

OIL ANALYSIS REPORT

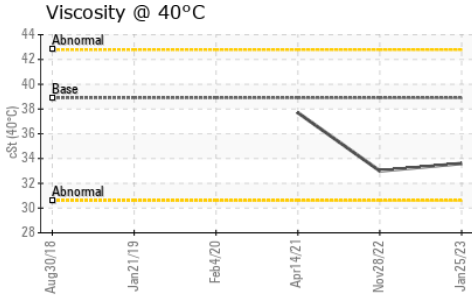




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	38.9	33.6	33.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

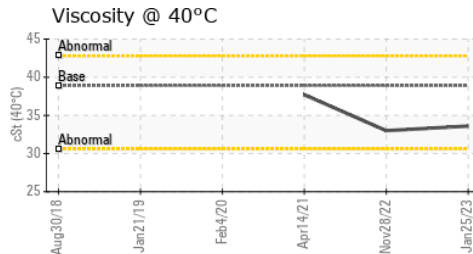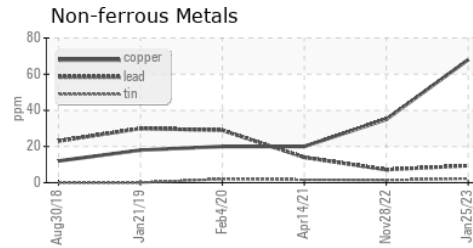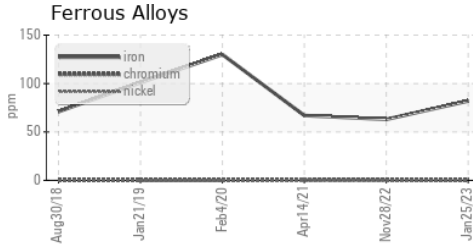

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0089119 **Received** : 29 Feb 2024
Lab Number : **06105646** **Tested** : 02 Mar 2024
Unique Number : 10903876 **Diagnosed** : 04 Mar 2024 - Sean Felton
Test Package : FLEET

NW WHITE & CO - GREER DIVISION
 1060 ROGERS BRIDGE RD
 DUNCAN, SC
 US 29334
 Contact: Matt Quinlan
 mquinlan@nwwhite.com
 T: (864)905-8506
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)