


OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

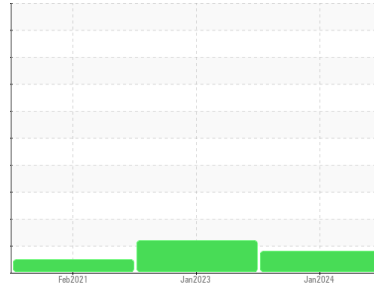

Machine Id
DT744
Component
Transmission (Auto)
Fluid
COGNIS EMGARD 2805 ATF (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	PCA0089139	PCA0089221	PCA0042782	
Sample Date	Client Info	08 Jan 2024	30 Jan 2023	16 Feb 2021	
Machine Age	mls	Client Info	117199	117199	25826
Oil Age	mls	Client Info	156466	16343	0
Oil Changed	Client Info	Changed	Not Changd	Not Changd	
Sample Status		ABNORMAL	ABNORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>220	▲ 235	168	71
Chromium	ppm	ASTM D5185m	>2	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>75	70	62	28
Lead	ppm	ASTM D5185m	>95	58	57	16
Copper	ppm	ASTM D5185m	>60	30	24	8
Tin	ppm	ASTM D5185m	>10	7	6	3
Antimony	ppm	ASTM D5185m	>2	---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		80	96	113
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		<1	1	<1
Manganese	ppm	ASTM D5185m		3	2	1
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		39	40	39
Phosphorus	ppm	ASTM D5185m		273	276	278
Zinc	ppm	ASTM D5185m		0	4	0
Sulfur	ppm	ASTM D5185m		813	1029	800



CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	8	8	5
Sodium	ppm	ASTM D5185m		8	8	5
Potassium	ppm	ASTM D5185m	>20	5	5	3

VISUAL

method	limit/base	current	history1	history2		
White Metal	scalar	*Visual	NONE	NONE	▲ MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT


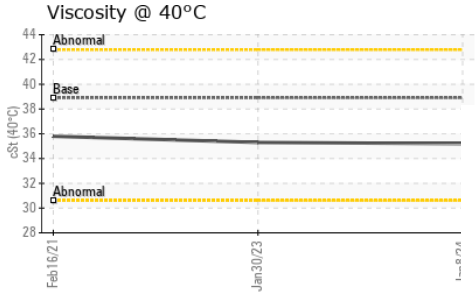
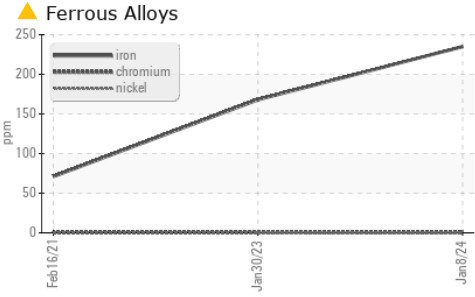


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	38.9	35.2	35.3	35.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

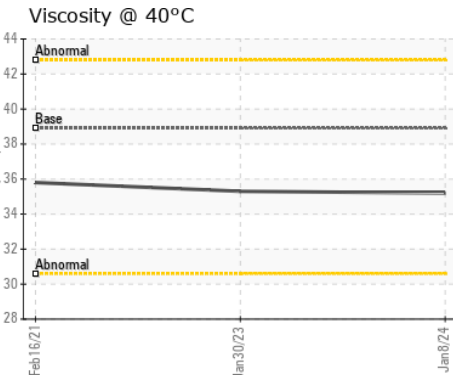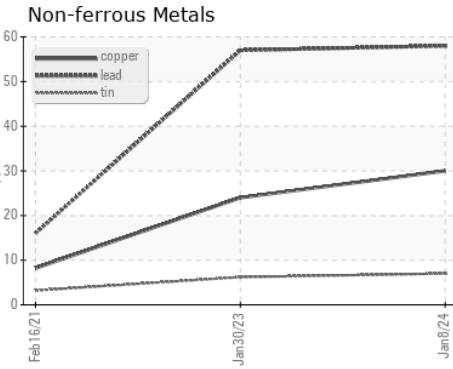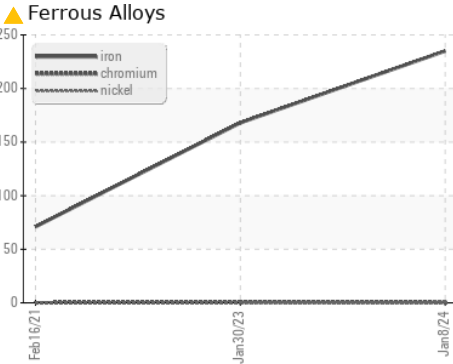

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0089139
Lab Number : 06105658
Unique Number : 10903888
Test Package : FLEET

Received : 29 Feb 2024
Tested : 02 Mar 2024
Diagnosed : 04 Mar 2024 - Sean Felton

NW WHITE & CO - GREER DIVISION
 1060 ROGERS BRIDGE RD
 DUNCAN, SC
 US 29334

Contact: Matt Quinlan
 mquinlan@nwwhite.com
 T: (864)905-8506

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: