




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(ML7082)**  
Machine Id  
**427101-54**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

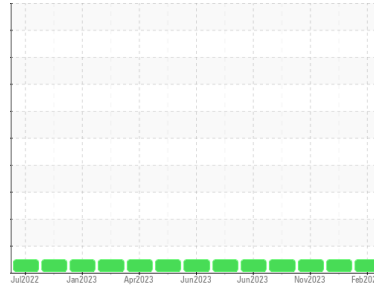

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0110596</b>	GFL0100185	GFL0091247
Sample Date	Client Info	<b>27 Feb 2024</b>	11 Dec 2023	13 Nov 2023
Machine Age	hrs	<b>600</b>	665084	660870
Oil Age	hrs	<b>600</b>	0	600
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>2</b>	5	7
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	3	3
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>5</b>	31	32
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	2	2
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>5</b>	30	31
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	65	64
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>965</b>	934	864
Calcium	ppm ASTM D5185m 1070	<b>1033</b>	1065	1053
Phosphorus	ppm ASTM D5185m 1150	<b>1112</b>	1058	987
Zinc	ppm ASTM D5185m 1270	<b>1263</b>	1273	1150
Sulfur	ppm ASTM D5185m 2060	<b>3459</b>	3206	3164

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	4	5
Sodium	ppm ASTM D5185m	<b>1</b>	0	0
Potassium	ppm ASTM D5185m >20	<b>1</b>	0	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0</b>	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>4.4</b>	6.1	6.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.4</b>	18.7	18.8

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.2</b>	14.2	14.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.4</b>	8.7	8.7







# OIL ANALYSIS REPORT

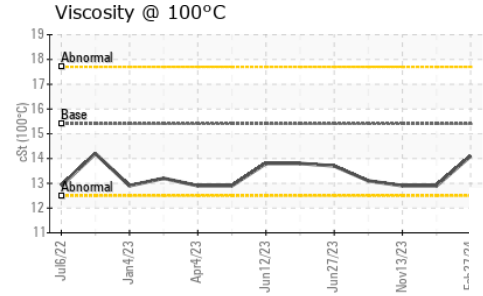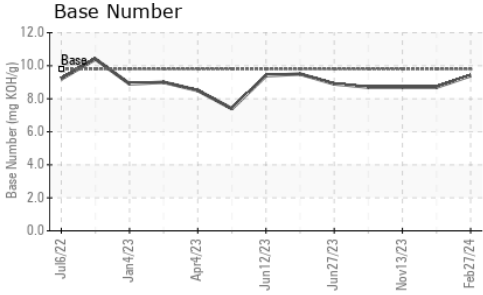

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	12.9	12.9

## GRAPHS

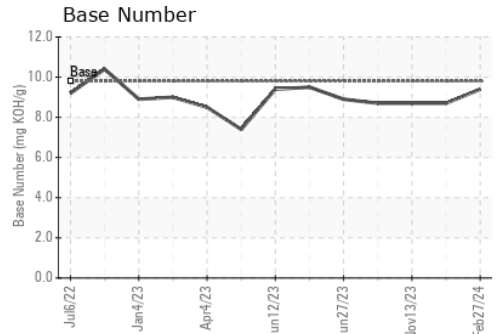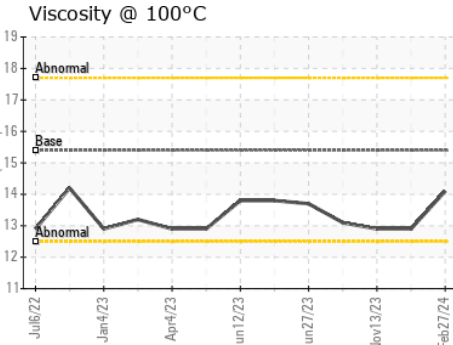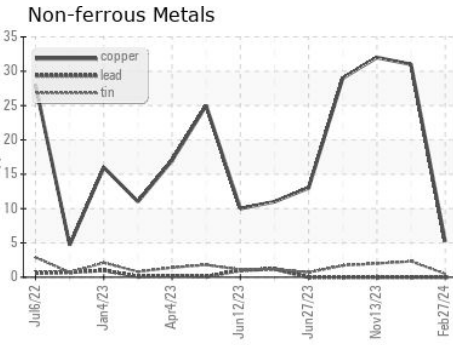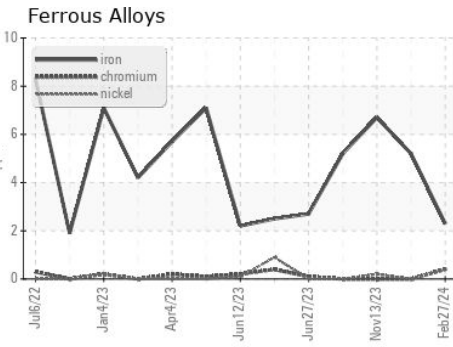

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110596  
**Lab Number** : **06105726**  
**Unique Number** : 10903956  
**Test Package** : FLEET

**Received** : 01 Mar 2024  
**Tested** : 01 Mar 2024  
**Diagnosed** : 01 Mar 2024 - Wes Davis

**GFL Environmental - 166 - Phenix City**  
 18 Old Brickyard Rd  
 Phenix City, AL  
 US 36869  
 Contact: DEAN PEACE JR  
 dean.peace@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: