




# OIL ANALYSIS REPORT

Sample Rating Trend

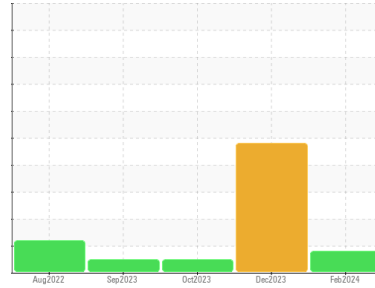

FUEL



Machine Id  
**923028-260204.1**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>GFL0104786</b>  | GFL0088226  | GFL0088234  |
| Sample Date   | Client Info | <b>22 Feb 2024</b> | 12 Dec 2023 | 09 Oct 2023 |
| Machine Age   | hrs         | <b>4928</b>        | 12857       | 0           |
| Oil Age       | hrs         | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info | <b>N/A</b>         | Changed     | Changed     |
| Sample Status |             | <b>MARGINAL</b>    | SEVERE      | NORMAL      |

## CONTAMINATION

| method | limit/base     | current    | history1 | history2 |
|--------|----------------|------------|----------|----------|
| Water  | WC Method >0.2 | <b>NEG</b> | NEG      | NEG      |
| Glycol | WC Method      | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >100 | <b>28</b>    | 34       | 6        |
| Chromium | ppm ASTM D5185m >20  | <b>2</b>     | 4        | 0        |
| Nickel   | ppm ASTM D5185m >4   | <b>&lt;1</b> | <1       | 0        |
| Titanium | ppm ASTM D5185m      | <b>&lt;1</b> | <1       | 0        |
| Silver   | ppm ASTM D5185m >3   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm ASTM D5185m >20  | <b>8</b>     | 3        | <1       |
| Lead     | ppm ASTM D5185m >40  | <b>0</b>     | <1       | 0        |
| Copper   | ppm ASTM D5185m >330 | <b>2</b>     | 1        | 0        |
| Tin      | ppm ASTM D5185m >15  | <b>&lt;1</b> | <1       | 0        |
| Vanadium | ppm ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm ASTM D5185m      | <b>&lt;1</b> | <1       | 0        |

## ADDITIVES

| method     | limit/base           | current      | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>8</b>     | 0        | <1       |
| Barium     | ppm ASTM D5185m 0    | <b>0</b>     | 12       | 0        |
| Molybdenum | ppm ASTM D5185m 60   | <b>60</b>    | 83       | 55       |
| Manganese  | ppm ASTM D5185m 0    | <b>&lt;1</b> | <1       | 0        |
| Magnesium  | ppm ASTM D5185m 1010 | <b>856</b>   | 367      | 908      |
| Calcium    | ppm ASTM D5185m 1070 | <b>940</b>   | 420      | 955      |
| Phosphorus | ppm ASTM D5185m 1150 | <b>945</b>   | 411      | 941      |
| Zinc       | ppm ASTM D5185m 1270 | <b>1120</b>  | 502      | 1166     |
| Sulfur     | ppm ASTM D5185m 2060 | <b>2725</b>  | 1281     | 2909     |

## CONTAMINANTS

| method    | limit/base          | current      | history1 | history2 |
|-----------|---------------------|--------------|----------|----------|
| Silicon   | ppm ASTM D5185m >25 | <b>6</b>     | 10       | 4        |
| Sodium    | ppm ASTM D5185m     | <b>6</b>     | ▲ 627    | 2        |
| Potassium | ppm ASTM D5185m >20 | <b>2</b>     | ▲ 37     | <1       |
| Fuel      | % ASTM D3524 >5     | ▲ <b>2.8</b> | ▲ 61.9   | <1.0     |

## INFRA-RED




| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>0.6</b>  | 0.5      | 0.1      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>6.6</b>  | 10.3     | 4.2      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>20.0</b> | 21.7     | 16.6     |

## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>15.2</b> | 25.8     | 11.9     |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>7.9</b>  | 5.2      | 8.7      |







# OIL ANALYSIS REPORT

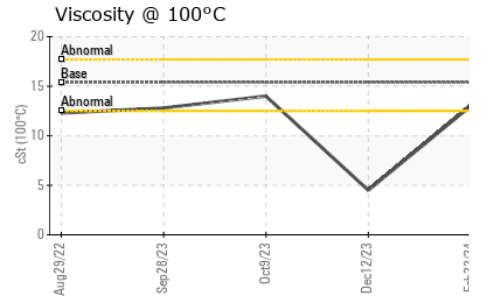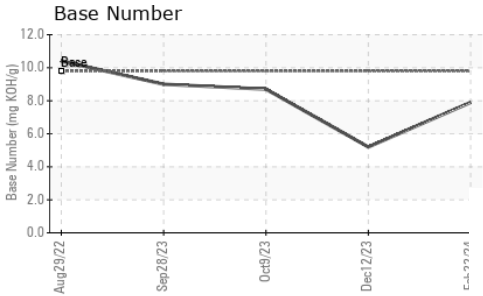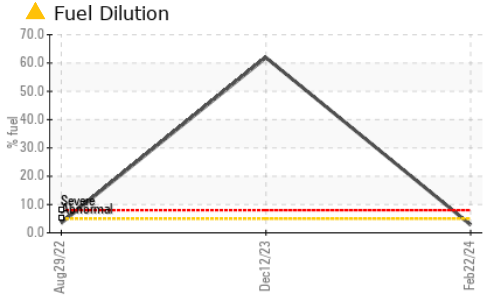

| VISUAL           | method | limit/base | current | history1     | history2 |
|------------------|--------|------------|---------|--------------|----------|
| White Metal      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     |
| Debris           | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | NORML    |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | <b>NEG</b>   | NEG      |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |
|------------------|--------|------------|---------|-------------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>13.0</b> | ▲ 4.5    |

## GRAPHS

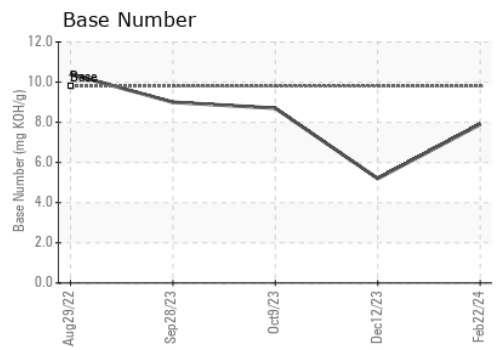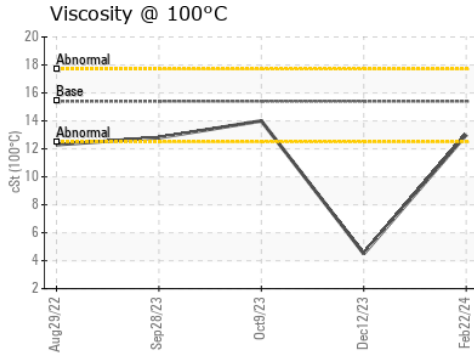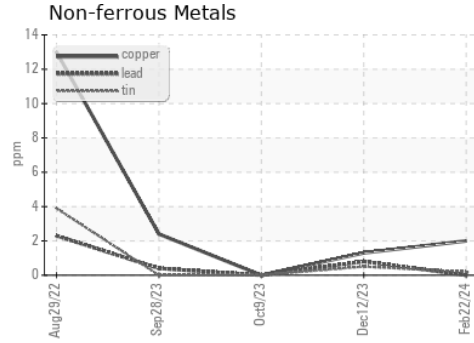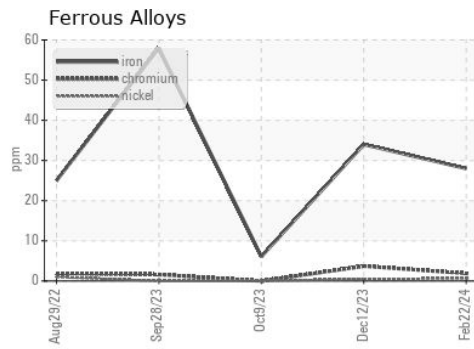

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104786 **Received** : 01 Mar 2024  
**Lab Number** : **06105763** **Tested** : 05 Mar 2024  
**Unique Number** : 10909260 **Diagnosed** : 05 Mar 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 820 - Joplin Hauling**  
 3700 West 7th Street  
 Joplin, MO  
 US 64801  
 Contact: James Jarrett  
 jjarrett@gflenv.com  
 T: (417)310-2802  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)