




# OIL ANALYSIS REPORT

Sample Rating Trend

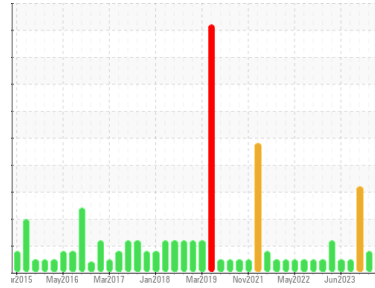

FUEL



Machine Id  
**10442 AUTOCAR ACX**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (48 GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0103194</b>	GFL0094646	GFL0094758
Sample Date	Client Info	<b>29 Feb 2024</b>	05 Dec 2023	25 Nov 2023
Machine Age	hrs	<b>6757</b>	6176	6089
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>41</b>	11	42
Chromium	ppm ASTM D5185m >5	<b>2</b>	<1	2
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>8</b>	5	6
Lead	ppm ASTM D5185m >25	<b>&lt;1</b>	0	1
Copper	ppm ASTM D5185m >100	<b>12</b>	10	▲ 78
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>3</b>	4	2
Barium	ppm ASTM D5185m 0	<b>0</b>	0	1
Molybdenum	ppm ASTM D5185m 60	<b>55</b>	54	58
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>861</b>	917	863
Calcium	ppm ASTM D5185m 1070	<b>948</b>	995	1025
Phosphorus	ppm ASTM D5185m 1150	<b>880</b>	1016	850
Zinc	ppm ASTM D5185m 1270	<b>1163</b>	1215	1094
Sulfur	ppm ASTM D5185m 2060	<b>2464</b>	2885	2603

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	8	8
Sodium	ppm ASTM D5185m	<b>9</b>	4	17
Potassium	ppm ASTM D5185m >20	<b>15</b>	1	23
Fuel	% ASTM D3524 >3.0	▲ <b>6.3</b>	▲ 5.8	▲ 14.1

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>1.9</b>	0.6	1.5
Nitration	Abs/cm *ASTM D7624 >20	<b>13.2</b>	6.8	12.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>26.2</b>	19.2	24.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>22.4</b>	14.5	22.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.2</b>	9.0	6.9







# OIL ANALYSIS REPORT

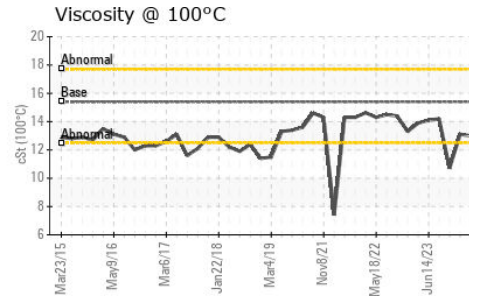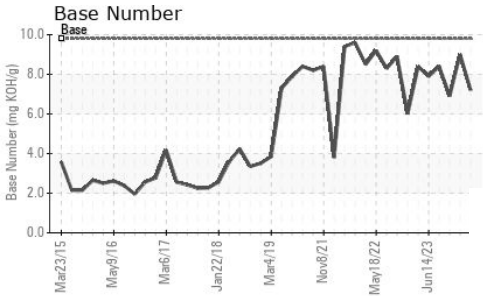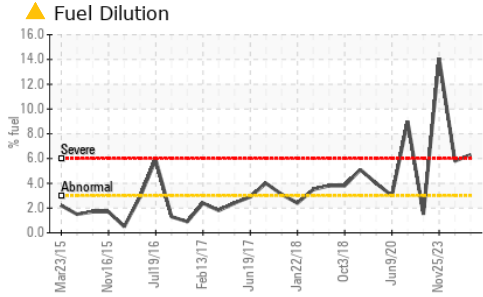

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.0	13.1 ▲ 10.7

## GRAPHS

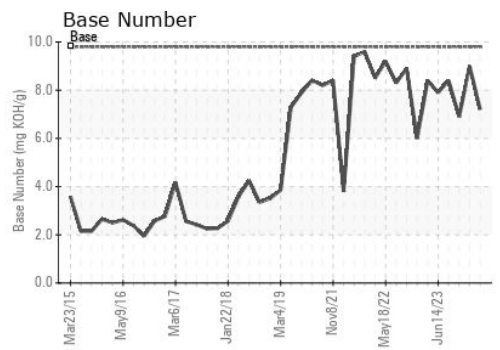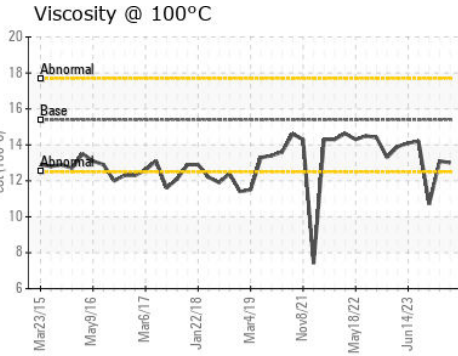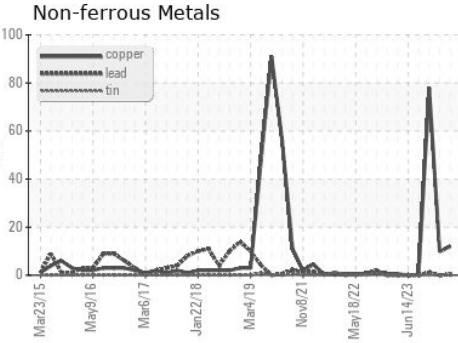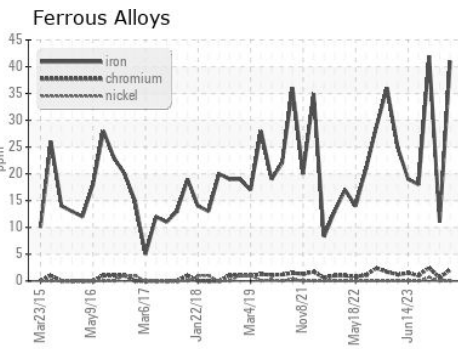

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103194 **Received** : 01 Mar 2024  
**Lab Number** : 06105848 **Tested** : 05 Mar 2024  
**Unique Number** : 10909345 **Diagnosed** : 05 Mar 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Ronald Gregory  
 rgregory@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (919)662-1730