


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

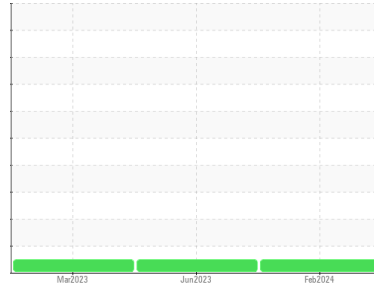

Area
(14251Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A61442
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0107527	PCA0094412	PCA0092029
Sample Date	Client Info		20 Feb 2024	28 Jun 2023	07 Mar 2023
Machine Age	mls	Client Info	386990	371558	359342
Oil Age	mls	Client Info	386990	371558	359342
Oil Changed	Client Info		Changed	Diff Oil	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	15	19	9
Chromium	ppm	ASTM D5185m >20	1	2	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	0	1
Lead	ppm	ASTM D5185m >40	2	2	0
Copper	ppm	ASTM D5185m >330	3	4	8
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	4	0	1
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	57	61	59
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 950	910	1028	937
Calcium	ppm	ASTM D5185m 1050	1047	1207	1135
Phosphorus	ppm	ASTM D5185m 995	999	1038	969
Zinc	ppm	ASTM D5185m 1180	1258	1317	1250
Sulfur	ppm	ASTM D5185m 2600	2921	3455	3219

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	4	4
Sodium	ppm	ASTM D5185m	1	2	2
Potassium	ppm	ASTM D5185m >20	1	3	0



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	9.0	10.5	8.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.5	22.0	19.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.5	17.4	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	7.7	7.1	8.0





OIL ANALYSIS REPORT

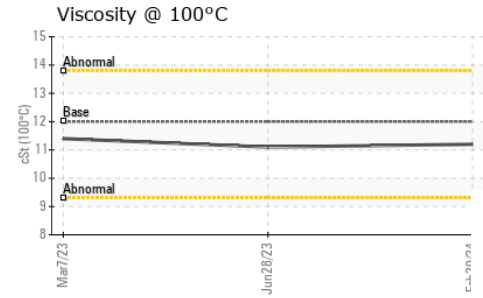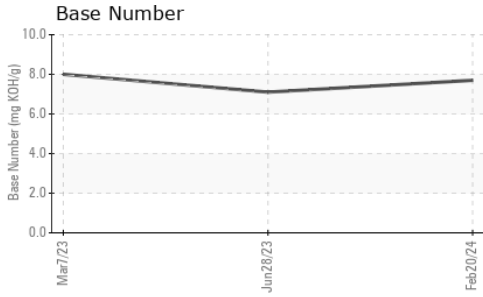

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.1	11.4

GRAPHS

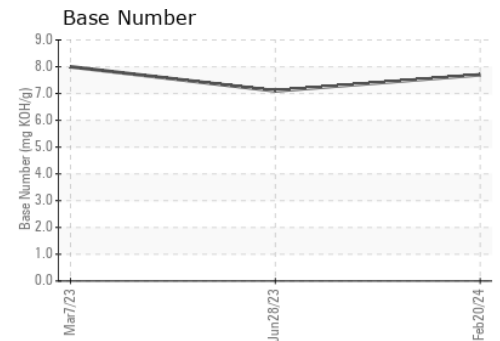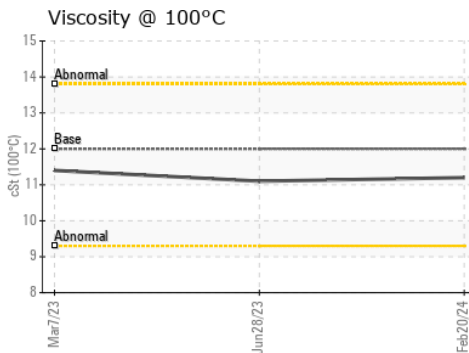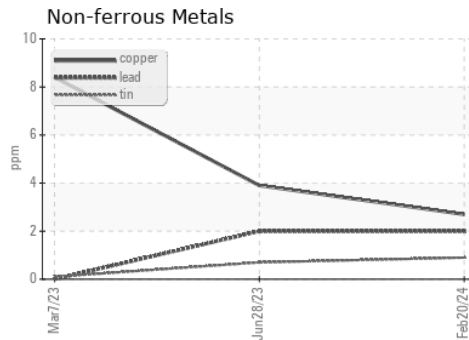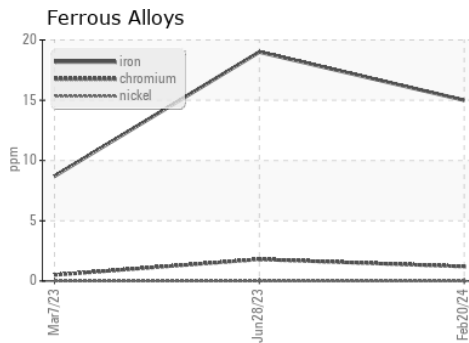

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0107527
Lab Number : **06105871**
Unique Number : 10909368
Test Package : FLEET

Received : 01 Mar 2024
Tested : 02 Mar 2024
Diagnosed : 02 Mar 2024 - Wes Davis

Transervice - Shop 1367 - Berkeley-Jupiter
 15998 Walgreens Drive
 Jupiter, FL
 US 33478

Contact: Manny Gonzalez
 egonzalez@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (561)776-0755
 F: (561)776-0799