


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

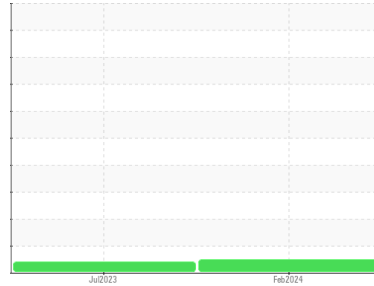

Machine Id  
**338**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info |             | <b>PCA0112155</b>  | PCA0095375  | ---      |
| Sample Date   | Client Info |             | <b>09 Feb 2024</b> | 28 Jul 2023 | ---      |
| Machine Age   | mls         | Client Info | <b>39569</b>       | 17757       | ---      |
| Oil Age       | mls         | Client Info | <b>21816</b>       | 17757       | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ATTENTION   | ---      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | 0.4      | ---      |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | ---      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | ---      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>31</b>    | 92       | ---      |
| Chromium | ppm    | ASTM D5185m >20  | <b>1</b>     | 3        | ---      |
| Nickel   | ppm    | ASTM D5185m >4   | <b>0</b>     | <1       | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | ---      |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | 0        | ---      |
| Aluminum | ppm    | ASTM D5185m >20  | <b>2</b>     | 6        | ---      |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b>     | 0        | ---      |
| Copper   | ppm    | ASTM D5185m >330 | <b>2</b>     | 5        | ---      |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | <1       | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | ---      |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>4</b>     | 43       | ---      |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 2        | ---      |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>64</b>    | 45       | ---      |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 2        | ---      |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>949</b>   | 598      | ---      |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1088</b>  | 1667     | ---      |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1061</b>  | 781      | ---      |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1224</b>  | 967      | ---      |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3038</b>  | 2935     | ---      |

## CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>7</b> | 12       | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>3</b> | 2        | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>2</b> | 1        | ---      |



## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.5</b>  | 0.6      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>8.5</b>  | 9.1      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>19.5</b> | 21.8     | ---      |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>16.1</b> | 20.5     | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>9.24</b> | 9.83     | ---      |









# OIL ANALYSIS REPORT

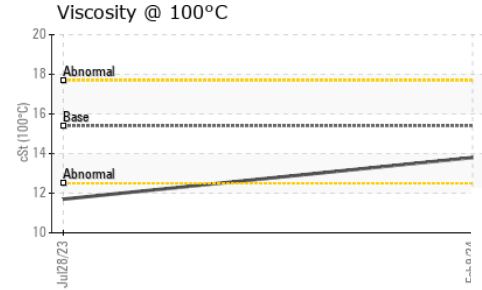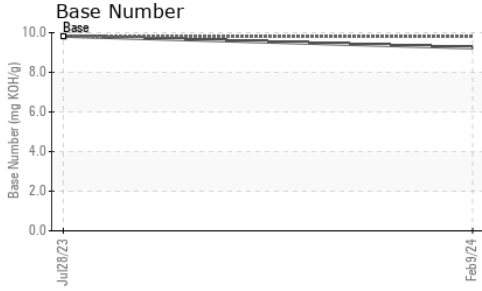

| VISUAL           | method | limit/base | current | history1 | history2 |     |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal      | scalar | *Visual    | NONE    | NONE     | LIGHT    | --- |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     | --- |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     | --- |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     | --- |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     | --- |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     | --- |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    | --- |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    | --- |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      | --- |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      | --- |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |     |
|------------------|--------|------------|---------|-------------|----------|-----|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>13.8</b> | 11.7     | --- |

## GRAPHS

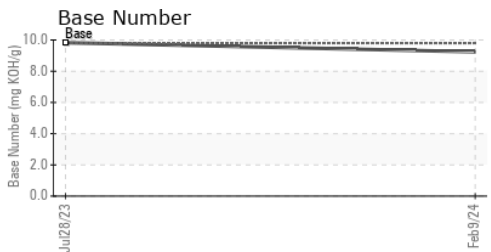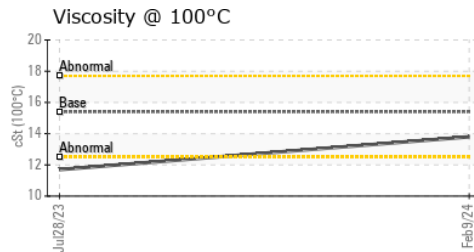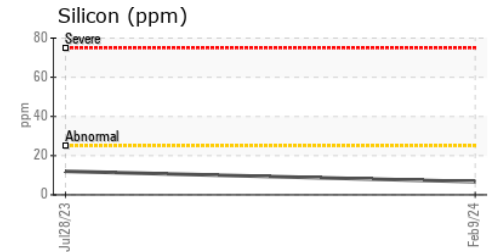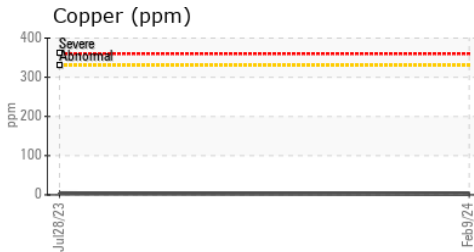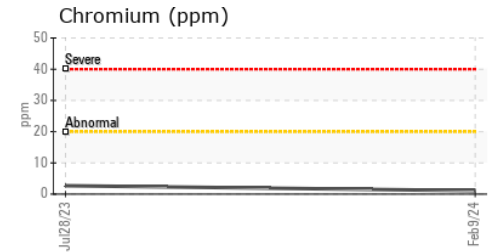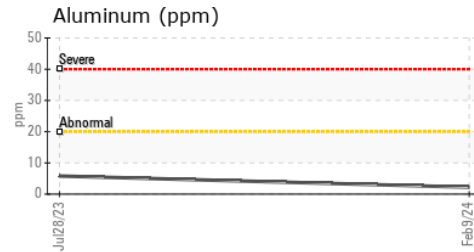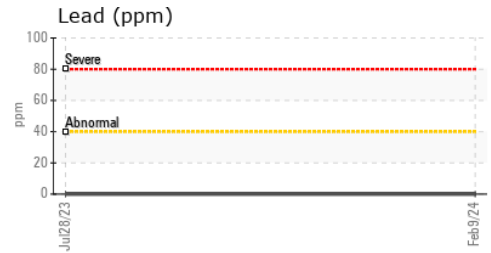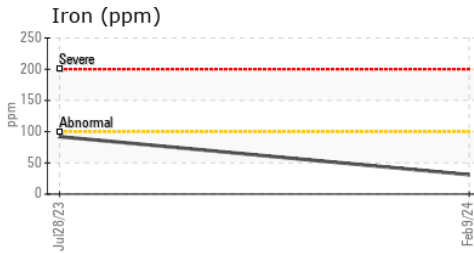

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112155      **Received** : 01 Mar 2024  
**Lab Number** : **06106312**      **Tested** : 04 Mar 2024  
**Unique Number** : 10909809      **Diagnosed** : 04 Mar 2024 - Wes Davis  
**Test Package** : MOB 2

**BROWN BUS COMPANY - UPSTATE TRANSIT**  
 50 VENNER ROAD  
 AMSTERDAM, NY  
 US 12010  
 Contact: CONNIE WILBUR  
 cwilbur@browncoach.com  
 T: (518)843-4700  
 F: (518)843-3600

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)