


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

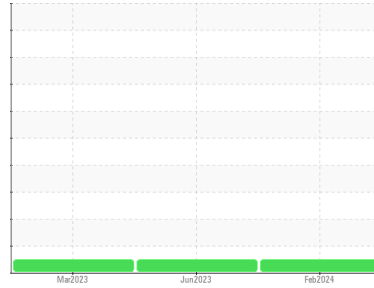

Area  
**(16081Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A61256**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0117296</b>	PCA0100224	PCA0089782
Sample Date	Client Info			<b>29 Feb 2024</b>	08 Jun 2023	09 Mar 2023
Machine Age	mls	Client Info		<b>438388</b>	409318	374273
Oil Age	mls	Client Info		<b>0</b>	67352	32307
Oil Changed	Client Info			<b>N/A</b>	Changed	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>39</b>	51	24
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	3	2
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>19</b>	30	15
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>7</b>	7	5
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>&lt;1</b>	0	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>63</b>	65	60
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m	950	<b>1063</b>	1074	928
Calcium	ppm	ASTM D5185m	1050	<b>1188</b>	1170	1067
Phosphorus	ppm	ASTM D5185m	995	<b>1114</b>	1088	965
Zinc	ppm	ASTM D5185m	1180	<b>1386</b>	1376	1195
Sulfur	ppm	ASTM D5185m	2600	<b>3027</b>	3177	3144

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	6	4
Sodium	ppm	ASTM D5185m		<b>1</b>	3	<1
Potassium	ppm	ASTM D5185m	>20	<b>16</b>	11	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.9	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.8</b>	12.0	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	25.6	20.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.9</b>	24.4	17.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.5</b>	4.5	6.9





# OIL ANALYSIS REPORT

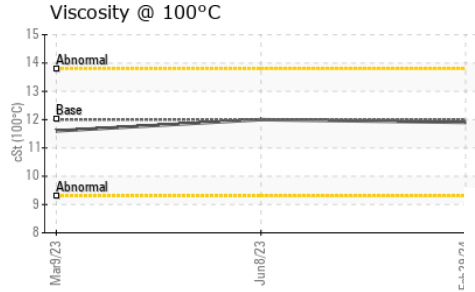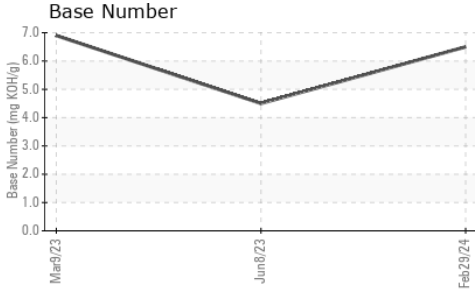

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.9</b>	12.0

## GRAPHS

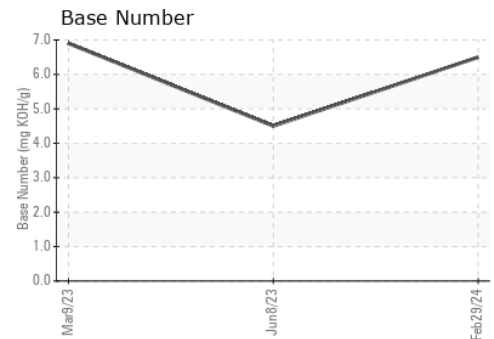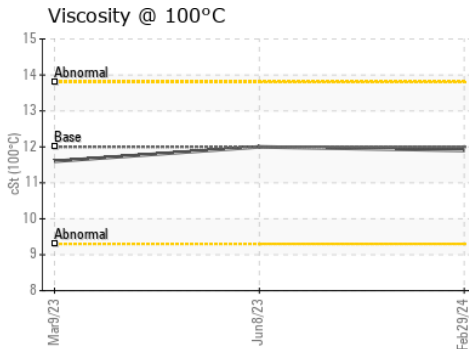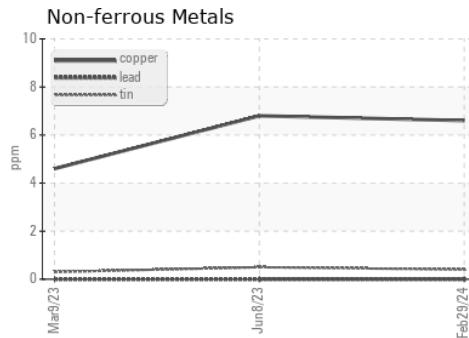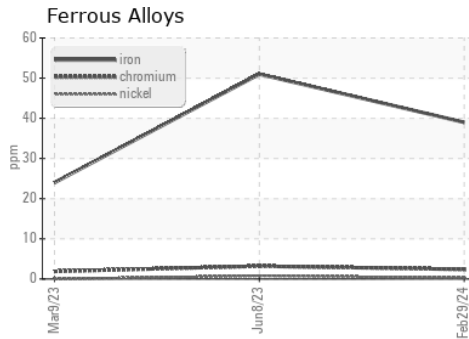

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117296  
**Lab Number** : **06106587**  
**Unique Number** : 10910084  
**Test Package** : FLEET

**Received** : 01 Mar 2024  
**Tested** : 04 Mar 2024  
**Diagnosed** : 04 Mar 2024 - Wes Davis

**Transervice - Shop 1367 - Berkeley-Jupiter**  
 15998 Walgreens Drive  
 Jupiter, FL  
 US 33478

Contact: Manny Gonzalez  
 egonzalez@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (561)776-0755  
 F: (561)776-0799