




OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id
912006
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

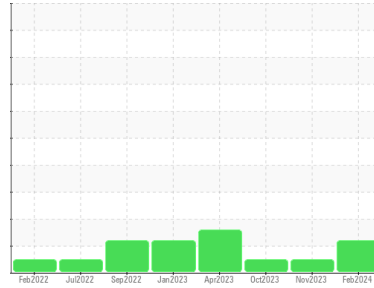

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0108950	GFL0101601	GFL0093170
Sample Date	Client Info	29 Feb 2024	16 Nov 2023	23 Oct 2023
Machine Age	hrs	7106	7100	6881
Oil Age	hrs	7100	6881	5175
Oil Changed	Client Info	Changed	N/A	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>120	47	6	20
Chromium	ppm	ASTM D5185m	>20	2	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	1
Titanium	ppm	ASTM D5185m	>2	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	8	1	2
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	2	1	2
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	2	0	<1
Barium	ppm	ASTM D5185m	0	0	0	3
Molybdenum	ppm	ASTM D5185m	60	79	57	61
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	1010	1115	881	900
Calcium	ppm	ASTM D5185m	1070	1235	1037	1076
Phosphorus	ppm	ASTM D5185m	1150	1311	960	931
Zinc	ppm	ASTM D5185m	1270	1572	1116	1207
Sulfur	ppm	ASTM D5185m	2060	3746	3100	2685

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	8	4	4
Sodium	ppm	ASTM D5185m		7	<1	1
Potassium	ppm	ASTM D5185m	>20	3	2	2
Fuel	%	ASTM D3524	>3.0	▲ 3.0	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>4	1.1	0.3	0.9
Nitration	Abs/cm	*ASTM D7624	>20	10.6	5.8	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7	18.8	21.6


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.1	14.3	17.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	5.5	8.3	6.4




OIL ANALYSIS REPORT


▲ Fuel Dilution

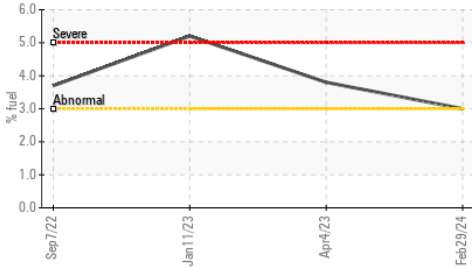

▲ Viscosity @ 100°C

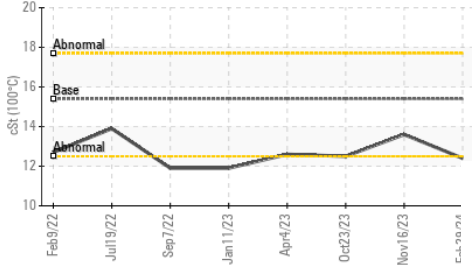

Base Number

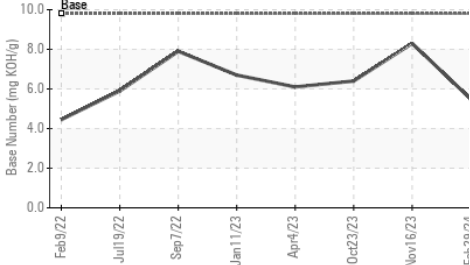


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 12.4	13.6	12.5

GRAPHS


Ferrous Alloys

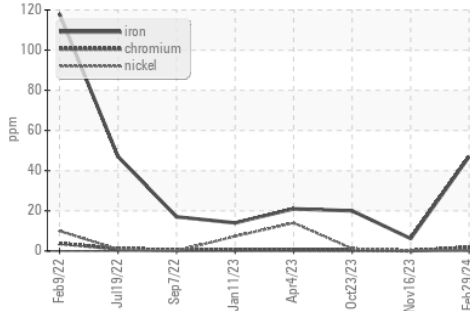


Non-ferrous Metals

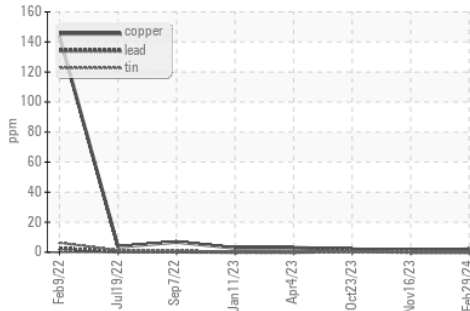

▲ Viscosity @ 100°C

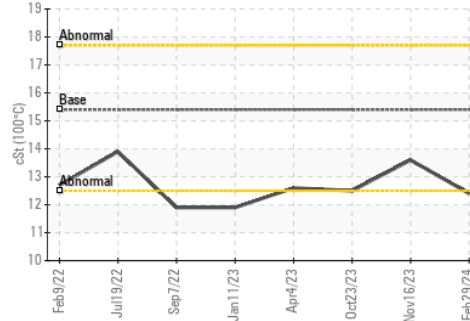

Base Number

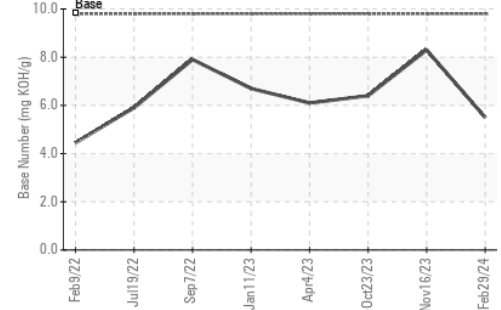

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0108950 **Received** : 04 Mar 2024
Lab Number : 06106924 **Tested** : 06 Mar 2024
Unique Number : 10910421 **Diagnosed** : 06 Mar 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)