


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

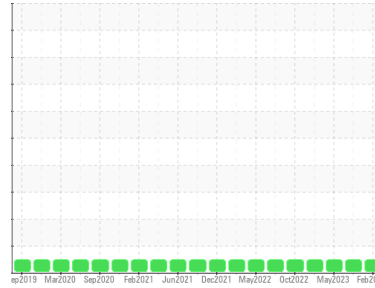

Area  
**FLEET**  
 Machine Id  
**26614**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0118718</b>	PCA0102843	PCA0093685
Sample Date	Client Info			<b>26 Feb 2024</b>	14 Sep 2023	04 May 2023
Machine Age	mls	Client Info		<b>624894</b>	585684	564555
Oil Age	mls	Client Info		<b>39210</b>	45741	24607
Oil Changed	Client Info			<b>Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>20</b>	30	18
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	2
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	5
Lead	ppm	ASTM D5185m	>40	<b>1</b>	3	3
Copper	ppm	ASTM D5185m	>330	<b>2</b>	6	3
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>0</b>	2	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>61</b>	59	57
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>1079</b>	979	955
Calcium	ppm	ASTM D5185m	1050	<b>1130</b>	1121	1060
Phosphorus	ppm	ASTM D5185m	995	<b>1096</b>	983	1013
Zinc	ppm	ASTM D5185m	1180	<b>1336</b>	1256	1276
Sulfur	ppm	ASTM D5185m	2600	<b>3084</b>	3291	3533

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	6	5
Sodium	ppm	ASTM D5185m		<b>11</b>	18	10
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.6	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	10.3	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	22.4	20.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.6</b>	18.7	16.8
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.8</b>	5.9	7.4





# OIL ANALYSIS REPORT

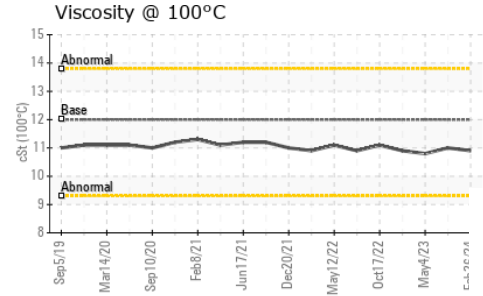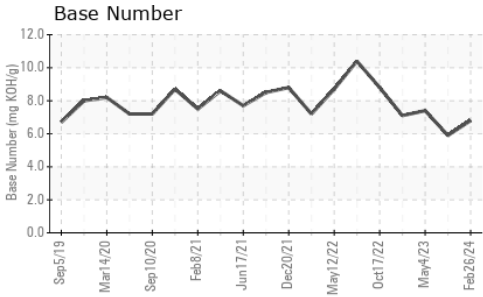

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.9	11.0

## GRAPHS

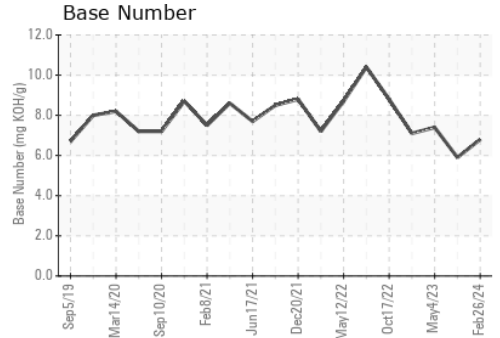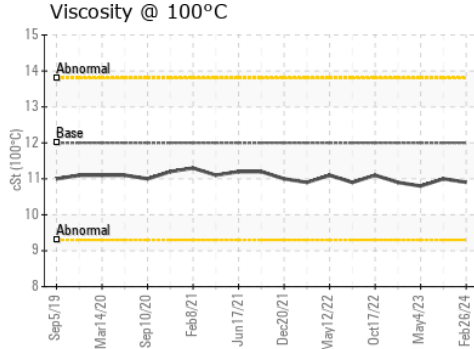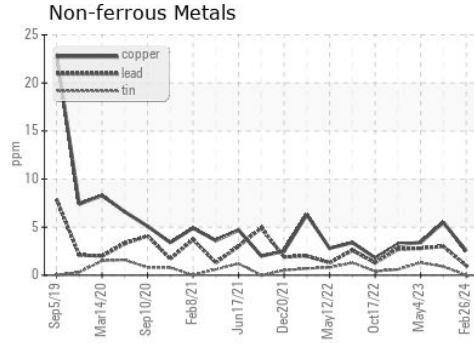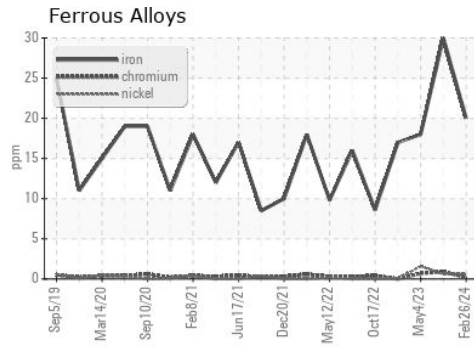

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0118718  
**Lab Number** : 06107036  
**Unique Number** : 10910533  
**Test Package** : FLEET

**Received** : 04 Mar 2024  
**Tested** : 04 Mar 2024  
**Diagnosed** : 04 Mar 2024 - Wes Davis

**PERDUE FARMS - ACCOMAC**  
 22520 LANKFORD HWY  
 ACCOMAC, VA  
 US 23301  
 Contact: PEGGY KIMES  
 peggy.kimes@perdue.com  
 T: (757)787-5304  
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)