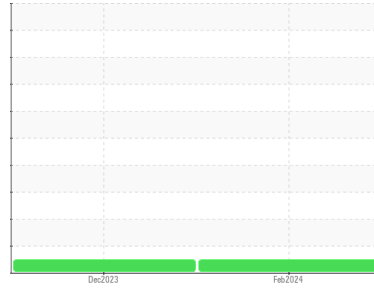


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area
FLEET
 Machine Id
VOLVO 2227112 (S/N 4V4NC9EH1RN643820)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (42 QTS)


DIAGNOSIS
Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0118721	PCA0113693	---
Sample Date	Client Info			26 Feb 2024	28 Dec 2023	---
Machine Age	mls	Client Info		40477	20194	---
Oil Age	mls	Client Info		20283	20194	---
Oil Changed	Client Info			Not Chngd	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	15	29	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>2	5	21	---
Aluminum	ppm	ASTM D5185m	>25	12	35	---
Lead	ppm	ASTM D5185m	>40	1	0	---
Copper	ppm	ASTM D5185m	>330	150	56	---
Tin	ppm	ASTM D5185m	>15	0	3	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	15	272	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	50	68	126	---
Manganese	ppm	ASTM D5185m	0	1	3	---
Magnesium	ppm	ASTM D5185m	950	1042	719	---
Calcium	ppm	ASTM D5185m	1050	1217	1462	---
Phosphorus	ppm	ASTM D5185m	995	1050	756	---
Zinc	ppm	ASTM D5185m	1180	1284	867	---
Sulfur	ppm	ASTM D5185m	2600	3041	2560	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	52	---
Sodium	ppm	ASTM D5185m		3	3	---
Potassium	ppm	ASTM D5185m	>20	29	102	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9	24.4	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.2	22.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.0	7.7	---





OIL ANALYSIS REPORT

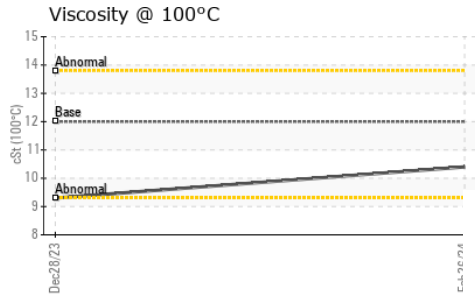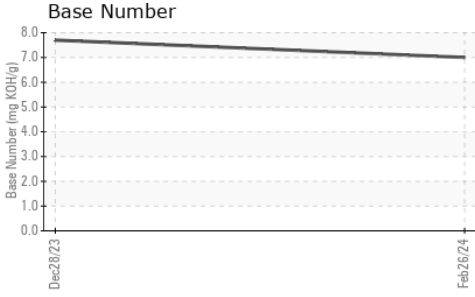

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	10.4	9.3	---

GRAPHS

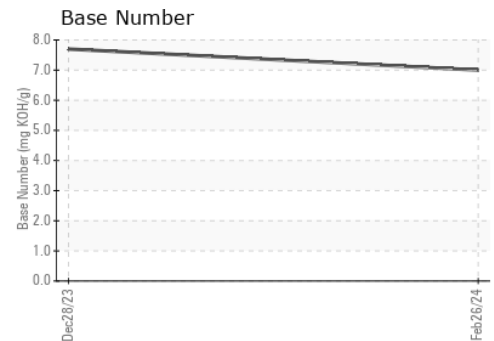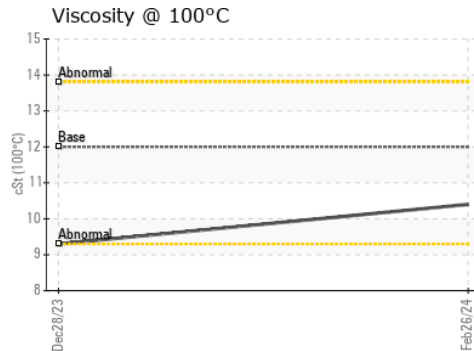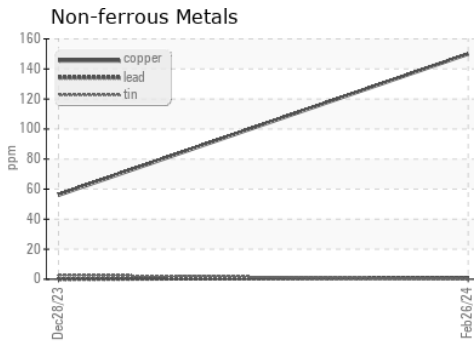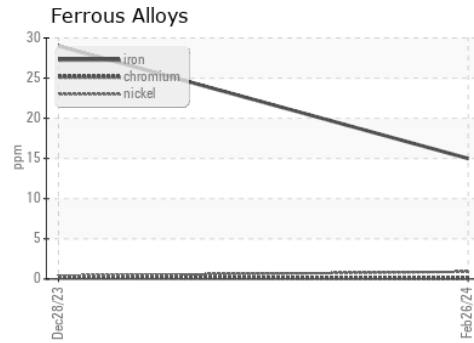

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0118721 **Received** : 04 Mar 2024
Lab Number : **06107037** **Tested** : 04 Mar 2024
Unique Number : 10910534 **Diagnosed** : 04 Mar 2024 - Wes Davis
Test Package : FLEET

PERDUE FARMS - ACCOMAC
 22520 LANKFORD HWY
 ACCOMAC, VA
 US 23301
 Contact: PEGGY KIMES
 peggy.kimes@perdue.com
 T: (757)787-5304
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)