




OIL ANALYSIS REPORT

Sample Rating Trend

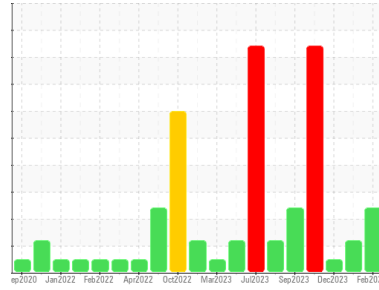

GLYCOL



Machine Id
827020-1032

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0113593	GFL0103836	GFL0103826
Sample Date	Client Info	27 Feb 2024	26 Dec 2023	06 Dec 2023
Machine Age	hrs	18228	17761	17659
Oil Age	hrs	467	102	590
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	8	5	80
Chromium	ppm ASTM D5185m >4	<1	0	<1
Nickel	ppm ASTM D5185m >2	<1	0	<1
Titanium	ppm ASTM D5185m	<1	0	<1
Silver	ppm ASTM D5185m >2	0	0	2
Aluminum	ppm ASTM D5185m >25	2	<1	17
Lead	ppm ASTM D5185m >45	2	2	0
Copper	ppm ASTM D5185m >85	<1	1	10
Tin	ppm ASTM D5185m >4	<1	<1	2
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	3	9	8
Barium	ppm ASTM D5185m 0	0	0	9
Molybdenum	ppm ASTM D5185m 60	89	73	71
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	987	1033	894
Calcium	ppm ASTM D5185m 1070	1083	1162	1260
Phosphorus	ppm ASTM D5185m 1150	1084	1104	1061
Zinc	ppm ASTM D5185m 1270	1308	1333	1282
Sulfur	ppm ASTM D5185m 2060	3463	3413	3208

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	6	5	15
Sodium	ppm ASTM D5185m	▲ 35	14	0
Potassium	ppm ASTM D5185m >20	▲ 259	▲ 97	5
Glycol	% *ASTM D2982	NEG	NEG	NEG

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.2	2.7
Nitration	Abs/cm *ASTM D7624 >20	9.8	7.2	13.0
Sulfation	Abs.1mm *ASTM D7415 >30	21.7	19.5	25.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs.1mm *ASTM D7414 >25	18.5	15.5	19.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.7	8.4	9.5







OIL ANALYSIS REPORT

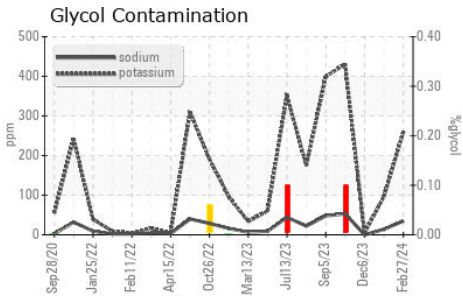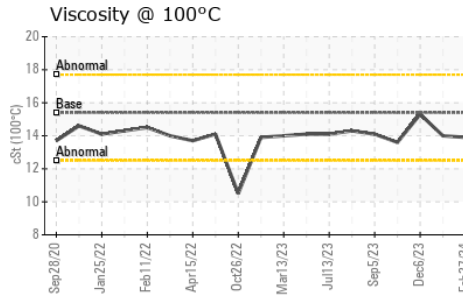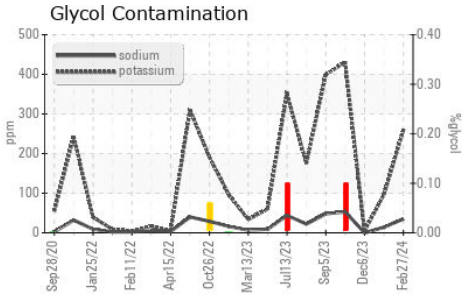

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.0

GRAPHS

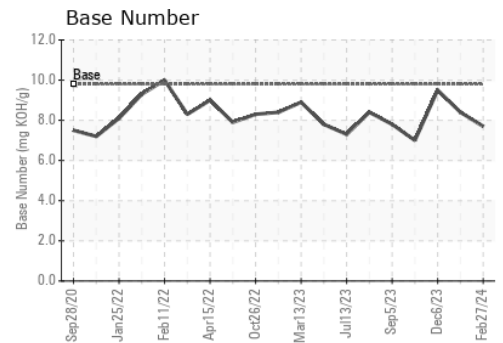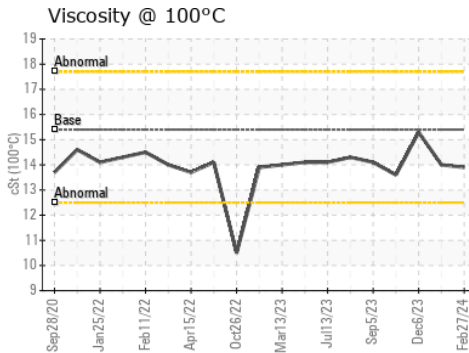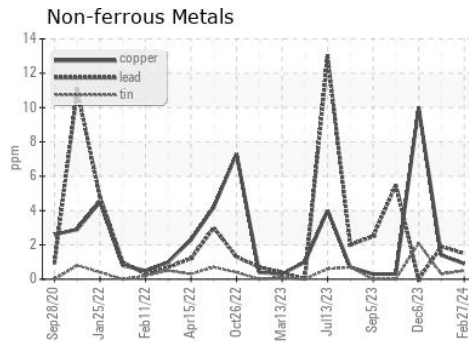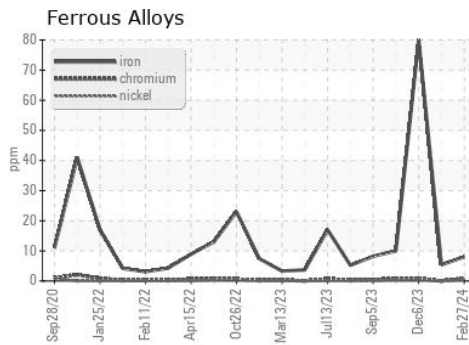

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0113593 **Received** : 04 Mar 2024
Lab Number : 06107248 **Tested** : 06 Mar 2024
Unique Number : 10910745 **Diagnosed** : 06 Mar 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 654S - Midlothian
 12230 Deergrove Road
 Midlothian, VA
 US 23112
 Contact: Corbin Umphlet
 cumphlet@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: