




OIL ANALYSIS REPORT

Sample Rating Trend

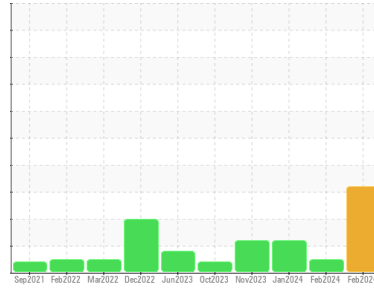

DIRT



Machine Id
923029-260205.1

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

An increase in the iron level is noted. All other component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0084579	GFL0109181	GFL0109152
Sample Date	Client Info			29 Feb 2024	21 Feb 2024	25 Jan 2024
Machine Age	hrs	Client Info		28257	11851	11632
Oil Age	hrs	Client Info		0	700	600
Oil Changed	Client Info			Changed	Not Changd	Changed
Sample Status				ABNORMAL	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	72	11	15
Chromium	ppm	ASTM D5185m	>20	3	<1	1
Nickel	ppm	ASTM D5185m	>4	2	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	10	2	3
Lead	ppm	ASTM D5185m	>40	2	<1	1
Copper	ppm	ASTM D5185m	>330	17	<1	<1
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	19	5	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	78	57	94
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	1284	920	1363
Calcium	ppm	ASTM D5185m	1070	1708	1021	1287
Phosphorus	ppm	ASTM D5185m	1150	1129	1043	1322
Zinc	ppm	ASTM D5185m	1270	1544	1215	1732
Sulfur	ppm	ASTM D5185m	2060	4147	3187	4201

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	41	6	8
Sodium	ppm	ASTM D5185m		40	2	131
Potassium	ppm	ASTM D5185m	>20	11	2	19


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.8	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	13.4	6.2	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.1	18.7	18.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.3	13.4	13.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.3	8.9	8.8




OIL ANALYSIS REPORT


▲ Silicon (ppm)

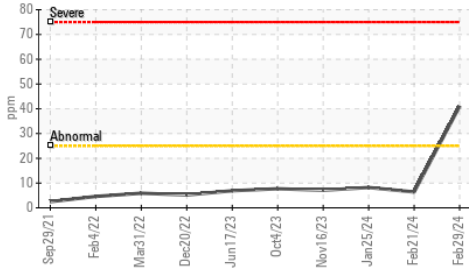


● Aluminum (ppm)

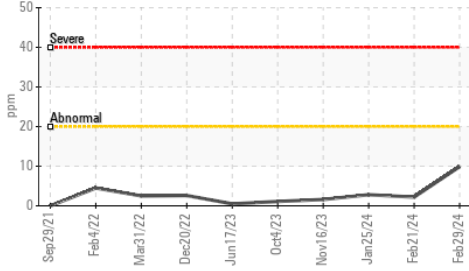


● Aluminum (ppm)

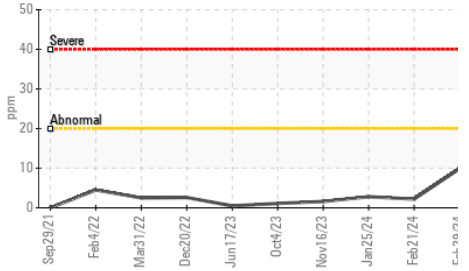

Base Number

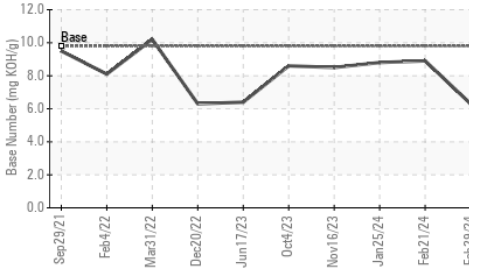

Viscosity @ 100°C

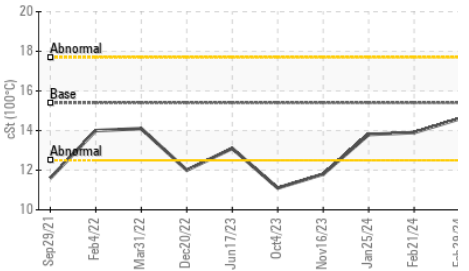


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	13.9

GRAPHS


● Ferrous Alloys

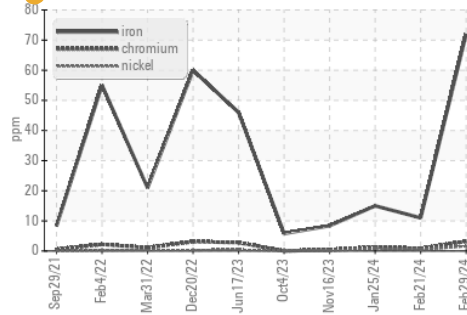


Non-ferrous Metals

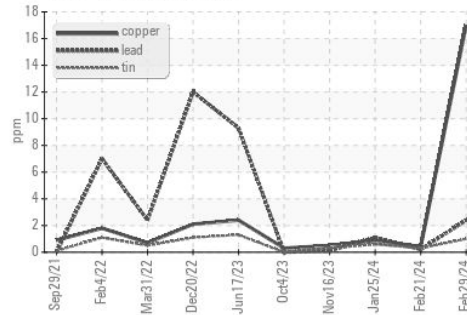

Viscosity @ 100°C

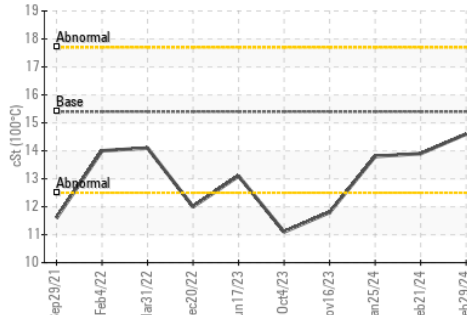

Base Number

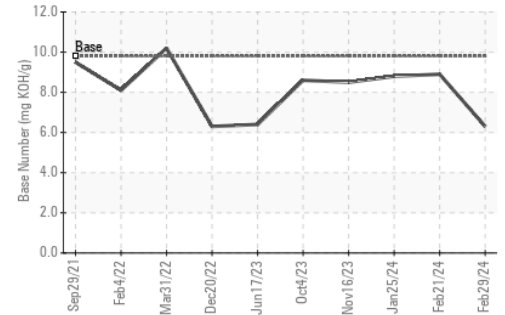

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0084579
 Lab Number : 06107257
 Unique Number : 10910754
 Test Package : FLEET

Received : 04 Mar 2024
 Tested : 05 Mar 2024
 Diagnosed : 06 Mar 2024 - Sean Felton

GFL Environmental - 822 - Springfield Hauling
 2120 West Bennett Street
 Springfield, MO
 US 65807
 Contact: Dennis Moore
 dennis.moore@gflenv.com
 T: (417)403-3641
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)