




OIL ANALYSIS REPORT

Sample Rating Trend

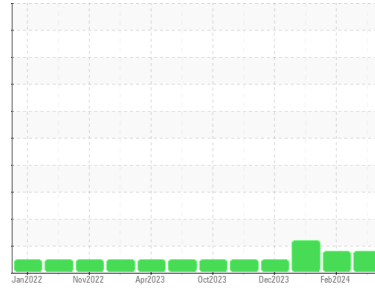

FUEL



Machine Id
411027

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0109254	GFL0109250	GFL0109278
Sample Date	Client Info	01 Mar 2024	27 Feb 2024	07 Feb 2024
Machine Age	hrs	6348	6329	6268
Oil Age	hrs	622	558	542
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	9	7	6
Chromium	ppm ASTM D5185m >20	1	<1	<1
Nickel	ppm ASTM D5185m >4	<1	0	0
Titanium	ppm ASTM D5185m	18	19	19
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	4	3	3
Lead	ppm ASTM D5185m >40	<1	0	0
Copper	ppm ASTM D5185m >330	1	<1	<1
Tin	ppm ASTM D5185m >15	<1	0	<1
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	20	25	24
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	42	43	43
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	745	800	788
Calcium	ppm ASTM D5185m 1070	1009	1124	1103
Phosphorus	ppm ASTM D5185m 1150	928	1028	958
Zinc	ppm ASTM D5185m 1270	1093	1184	1154
Sulfur	ppm ASTM D5185m 2060	3062	3138	3112

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	4	5
Sodium	ppm ASTM D5185m	4	3	2
Potassium	ppm ASTM D5185m >20	7	7	5
Fuel	% ASTM D3524 >5	▲ 5.8	▲ 6.1	▲ 5.7

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.6	0.5	0.5
Nitration	Abs/cm *ASTM D7624 >20	7.3	7.0	6.9
Sulfation	Abs/.1mm *ASTM D7415 >30	19.3	18.9	18.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.0	13.6	13.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.1	8.3	8.3







OIL ANALYSIS REPORT

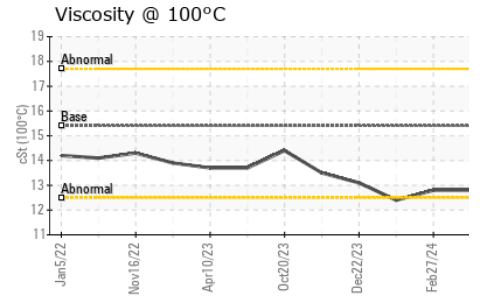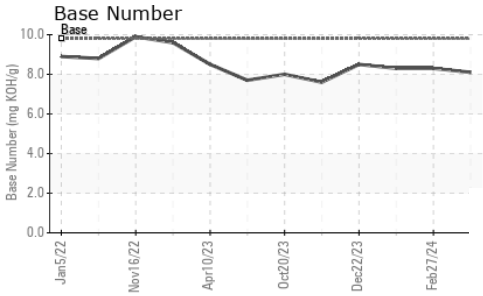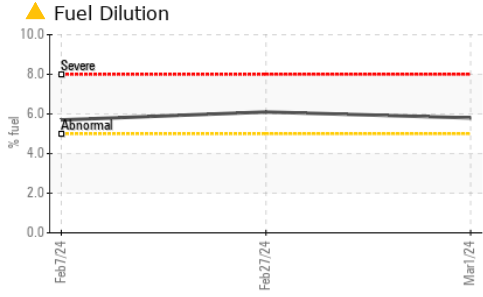

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	12.8 ▲ 12.4

GRAPHS

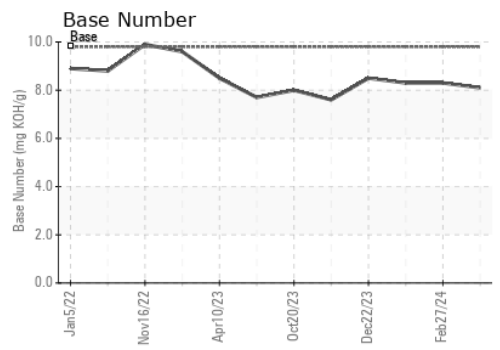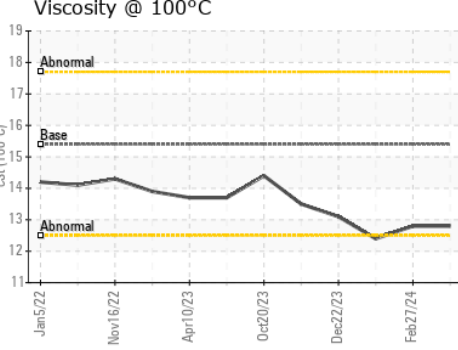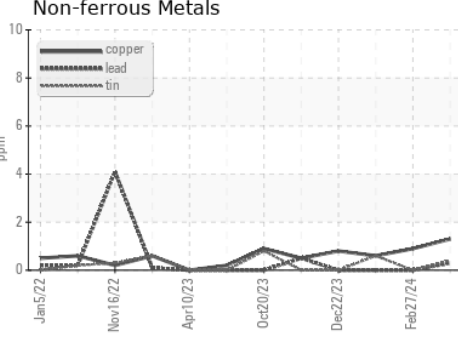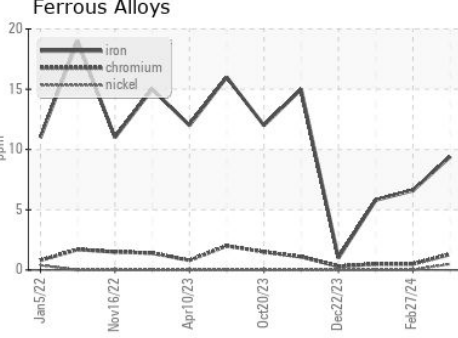

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109254 **Received** : 04 Mar 2024
Lab Number : **06107261** **Tested** : 06 Mar 2024
Unique Number : 10910758 **Diagnosed** : 06 Mar 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 891 - Oklahoma City Hauling
 1001 South Rockwell
 Oklahoma City, OK
 US 73128
 Contact: Andy Smith
 andrew.smith@gflenv.com
 T: (405)306-1651
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)