


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

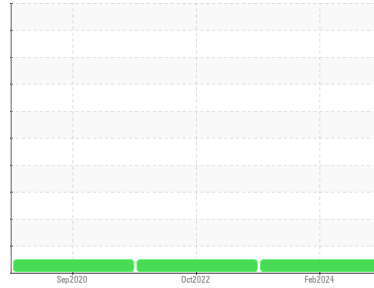

Area  
**Charlestown**  
Machine Id  
**663**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0104517</b>	PCA0077981	PCA0018551
Sample Date	Client Info		<b>26 Feb 2024</b>	24 Oct 2022	16 Sep 2020
Machine Age	mls	Client Info	<b>0</b>	0	103640
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>21</b>	13	17
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	3
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>14</b>	10	14
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >30	<b>3</b>	3	28
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	2
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>2</b>	0	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>57</b>	56	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>907</b>	963	904
Calcium	ppm	ASTM D5185m 1050	<b>1053</b>	1135	1199
Phosphorus	ppm	ASTM D5185m 995	<b>983</b>	938	998
Zinc	ppm	ASTM D5185m 1180	<b>1225</b>	1272	1235
Sulfur	ppm	ASTM D5185m 2600	<b>2510</b>	3116	2408

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>5</b>	4	2
Sodium	ppm	ASTM D5185m	<b>2</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>4</b>	4	26



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.6	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.9</b>	9.5	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.9</b>	21.9	20.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.1</b>	17.2	15.7
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.47</b>	7.40	8.08









# OIL ANALYSIS REPORT

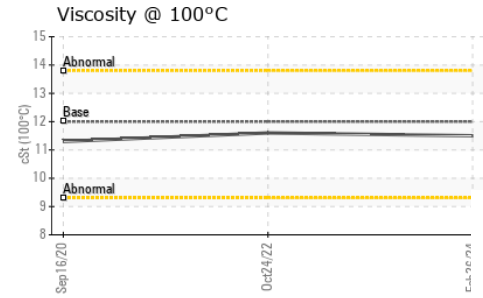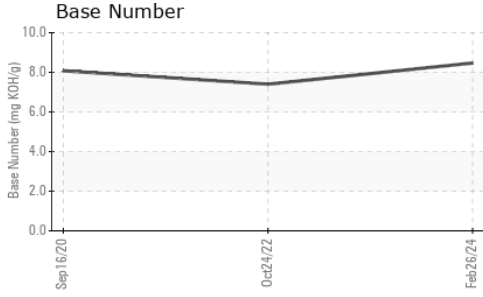

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	11.6

## GRAPHS

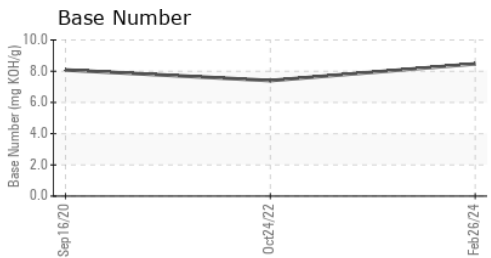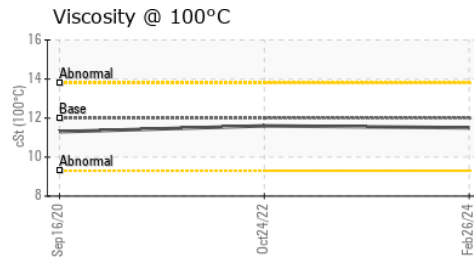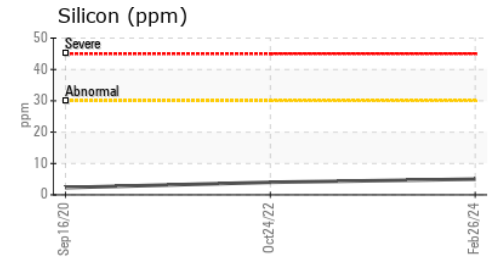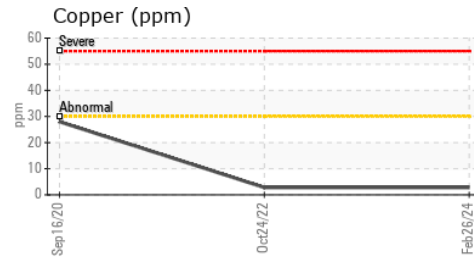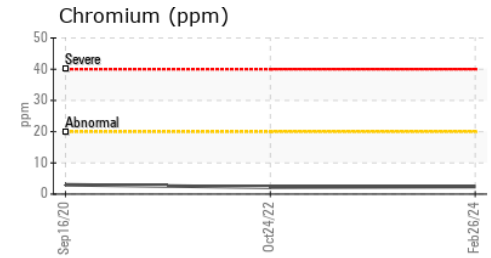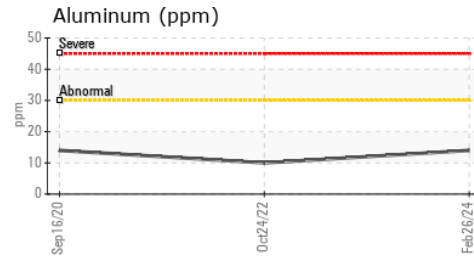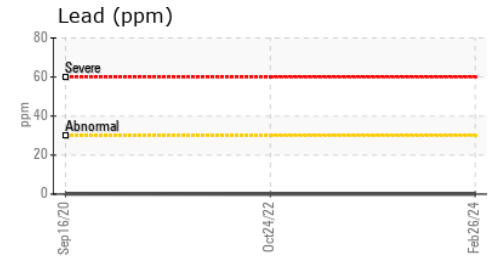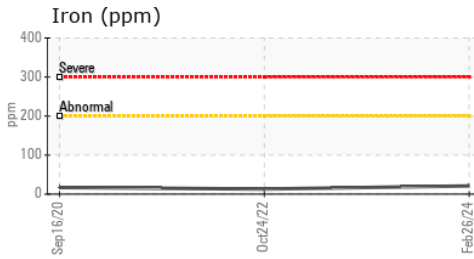

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104517  
**Lab Number** : 06107645  
**Unique Number** : 10911142  
**Test Package** : MOB 2

**Received** : 04 Mar 2024  
**Tested** : 05 Mar 2024  
**Diagnosed** : 05 Mar 2024 - Wes Davis

**PORTSIDE TRUCK AND AUTO - DIVERSIFIED AUTO**  
 100 TERMINAL ST  
 CHARLESTOWN, MA  
 US 02129

Contact: BRYAN WINTER  
 BWINTERS@DIVERSIFIEDAUTO.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: 1(857)998-2229

F: