




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

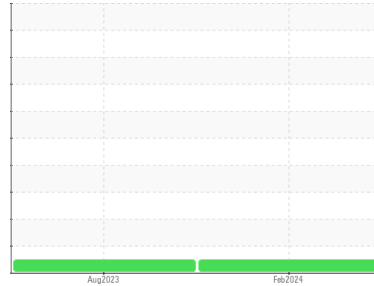

Machine Id  
**520017**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0069917</b>	GFL0069977	---
Sample Date	Client Info		<b>13 Feb 2024</b>	24 Aug 2023	---
Machine Age	mls	Client Info	<b>538210</b>	521767	---
Oil Age	mls	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>79</b>	58	---
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m >4	<b>1</b>	2	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	3	---
Lead	ppm	ASTM D5185m >40	<b>1</b>	2	---
Copper	ppm	ASTM D5185m >330	<b>1</b>	2	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	6	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	44	---
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	55	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m 1010	<b>1015</b>	846	---
Calcium	ppm	ASTM D5185m 1070	<b>1049</b>	1103	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1018</b>	901	---
Zinc	ppm	ASTM D5185m 1270	<b>1282</b>	1136	---
Sulfur	ppm	ASTM D5185m 2060	<b>2796</b>	2988	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	5	---
Sodium	ppm	ASTM D5185m	<b>5</b>	4	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>2.4</b>	1.6	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.9</b>	10.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.9</b>	22.5	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.3</b>	18.1	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.8</b>	8.4	---







# OIL ANALYSIS REPORT

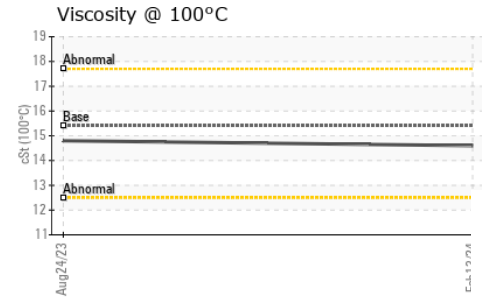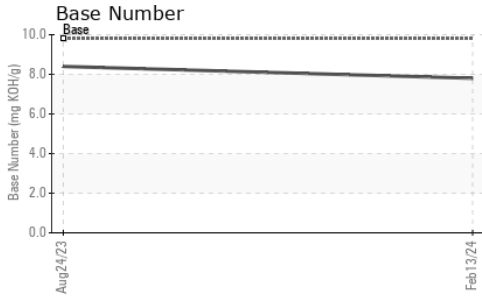

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	14.8	---

## GRAPHS

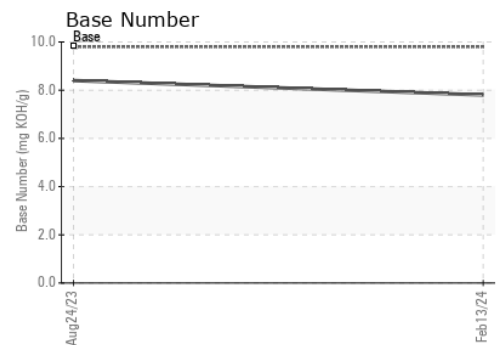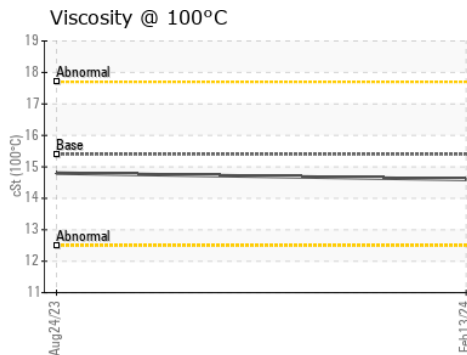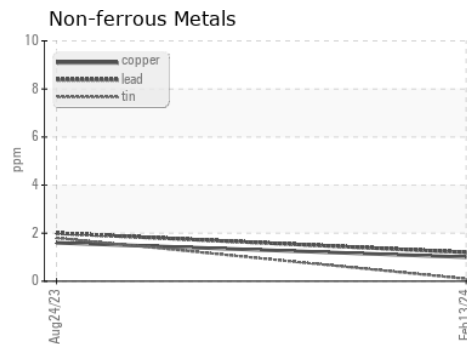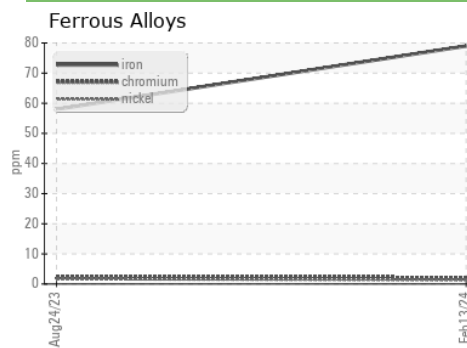

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0069917  
**Lab Number** : **06108372**  
**Unique Number** : 10911869  
**Test Package** : FLEET

**Received** : 05 Mar 2024  
**Tested** : 06 Mar 2024  
**Diagnosed** : 06 Mar 2024 - Wes Davis

**GFL Environmental - 902 - Chilton HC**  
 428 High St  
 Chilton, WI  
 US 53014

Contact: Keith Mueller  
 keith.mueller@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (920)374-1404

F: