




OIL ANALYSIS REPORT

Sample Rating Trend

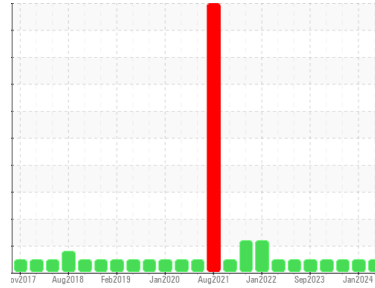

NORMAL



Machine Id

3773

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (30 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0113695	GFL0103476	GFL0103487
Sample Date	Client Info	29 Feb 2024	17 Jan 2024	14 Dec 2023
Machine Age	hrs	14853	14716	14539
Oil Age	hrs	9130	8993	8816
Oil Changed	Client Info	N/A	N/A	Not Chngd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >165	12	10	20
Chromium	ppm ASTM D5185m >5	<1	<1	<1
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m >2	0	<1	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	2	1	2
Lead	ppm ASTM D5185m >150	0	2	<1
Copper	ppm ASTM D5185m >90	3	2	10
Tin	ppm ASTM D5185m >5	0	<1	0
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	9	8	18
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	70	66	61
Manganese	ppm ASTM D5185m 0	0	<1	0
Magnesium	ppm ASTM D5185m 1010	930	1029	877
Calcium	ppm ASTM D5185m 1070	1026	1134	1052
Phosphorus	ppm ASTM D5185m 1150	990	1101	895
Zinc	ppm ASTM D5185m 1270	1221	1366	1183
Sulfur	ppm ASTM D5185m 2060	2970	3396	3146

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >35	6	5	10
Sodium	ppm ASTM D5185m	22	11	32
Potassium	ppm ASTM D5185m >20	2	3	2

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >7.5	0.3	0.2	0.3
Nitration	Abs/cm *ASTM D7624 >20	6.8	6.0	7.6
Sulfation	Abs/.1mm *ASTM D7415 >30	18.7	18.0	19.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.0	13.7	14.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.2	8.6	7.3







OIL ANALYSIS REPORT

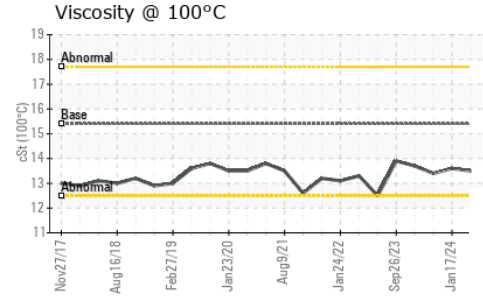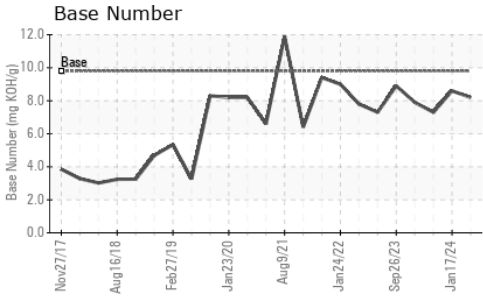

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.6	13.4

GRAPHS

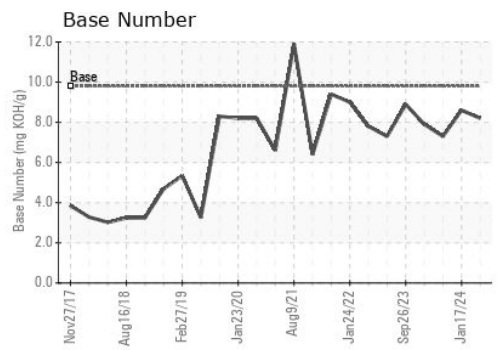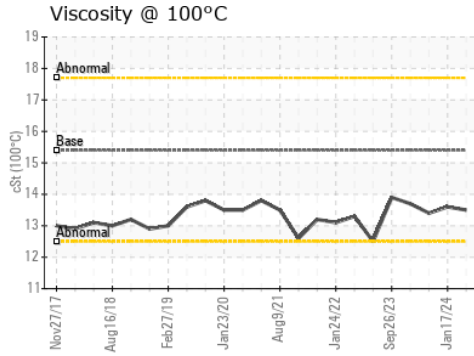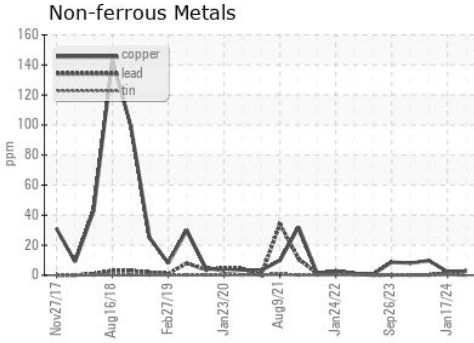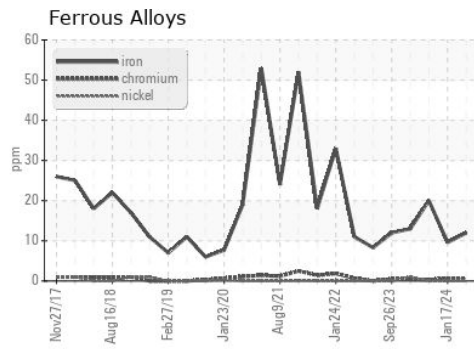

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0113695 **Received** : 05 Mar 2024
Lab Number : **06108407** **Tested** : 06 Mar 2024
Unique Number : 10911904 **Diagnosed** : 06 Mar 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)
 13737 Plant Rd
 Childersburg, AL
 US 35044
 Contact: JONATHAN WILLIAMS
 jonathan.williams@gflenv.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)