




# OIL ANALYSIS REPORT

Sample Rating Trend

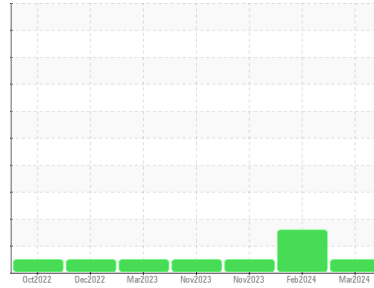

**NORMAL**



Machine Id  
**712038**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108977</b>	GFL0108967	GFL0089087
Sample Date	Client Info	<b>01 Mar 2024</b>	29 Feb 2024	22 Nov 2023
Machine Age	hrs	<b>7104</b>	7093	6588
Oil Age	hrs	<b>6588</b>	6588	2600
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	ATTENTION	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>21</b>	13	6
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>4</b>	2	2
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>1</b>	<1	0
Tin	ppm ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	2
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>64</b>	36	55
Manganese	ppm ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>959</b>	537	912
Calcium	ppm ASTM D5185m 1070	<b>1082</b>	604	1045
Phosphorus	ppm ASTM D5185m 1150	<b>1040</b>	639	1102
Zinc	ppm ASTM D5185m 1270	<b>1302</b>	722	1265
Sulfur	ppm ASTM D5185m 2060	<b>2920</b>	1781	3008

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	3	2
Sodium	ppm ASTM D5185m	<b>6</b>	7	5
Potassium	ppm ASTM D5185m >20	<b>3</b>	2	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.8</b>	0.9	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>10.3</b>	10.8	8.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.9</b>	22.4	19.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.1</b>	19.8	16.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.7</b>	6.3	8.1







# OIL ANALYSIS REPORT

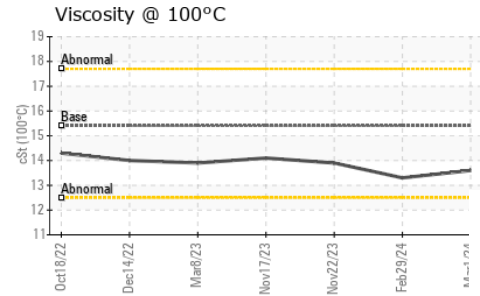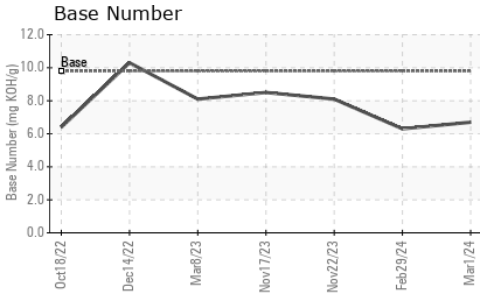

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.3	13.9

## GRAPHS

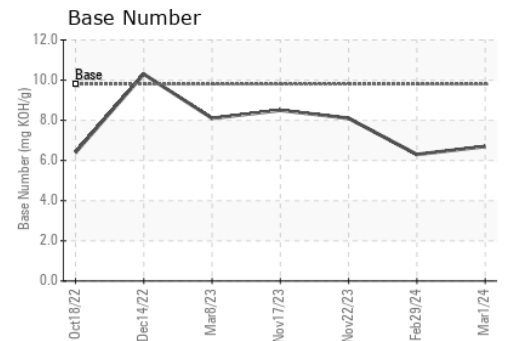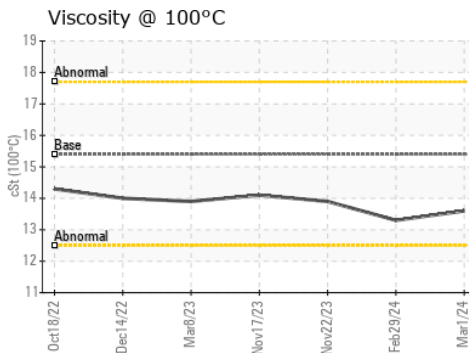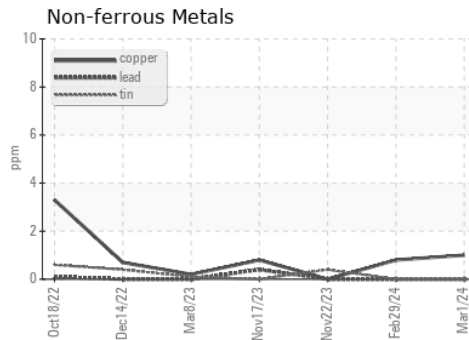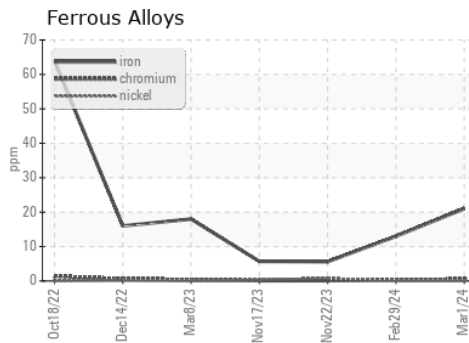

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0108977  
 Lab Number : **06108439**  
 Unique Number : 10911936  
 Test Package : FLEET

Received : 05 Mar 2024  
 Tested : 06 Mar 2024  
 Diagnosed : 06 Mar 2024 - Wes Davis

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)