




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**10963 FREIGHTLINER M2 106**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (42 QTS)**

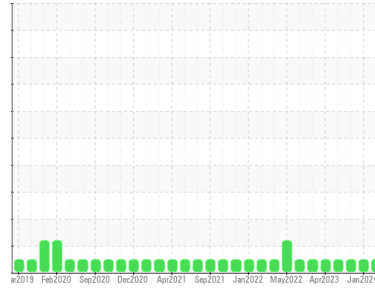

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0103190</b>	GFL0103250	GFL0056743
Sample Date	Client Info	<b>04 Mar 2024</b>	05 Jan 2024	04 Oct 2023
Machine Age	hrs	<b>17853</b>	17455	16843
Oil Age	hrs	<b>398</b>	612	1131
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>8</b>	15	16
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>2</b>	2	2
Lead	ppm ASTM D5185m >25	<b>3</b>	0	0
Copper	ppm ASTM D5185m >100	<b>0</b>	0	<1
Tin	ppm ASTM D5185m >4	<b>0</b>	0	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	0	1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>57</b>	61	66
Manganese	ppm ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>999</b>	977	997
Calcium	ppm ASTM D5185m 1070	<b>1058</b>	1096	1109
Phosphorus	ppm ASTM D5185m 1150	<b>1062</b>	1085	1083
Zinc	ppm ASTM D5185m 1270	<b>1249</b>	1262	1330
Sulfur	ppm ASTM D5185m 2060	<b>3256</b>	3348	3259

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	4	7
Sodium	ppm ASTM D5185m	<b>3</b>	4	6
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.3</b>	0.4	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>7.3</b>	8.6	9.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.5</b>	20.1	20.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.8</b>	16.7	17.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.3</b>	6.9	7.6







# OIL ANALYSIS REPORT

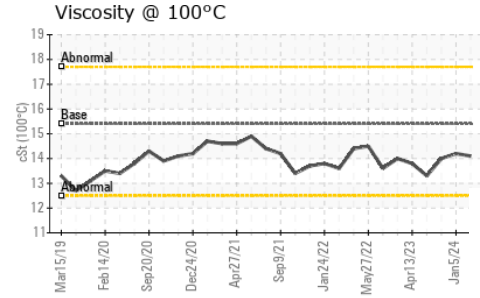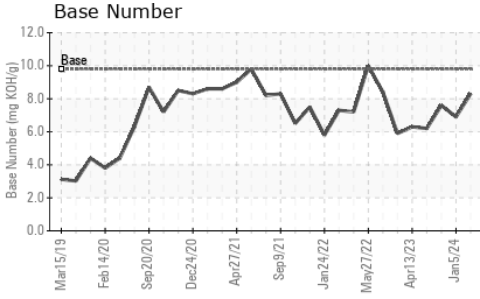

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.2	14.0

## GRAPHS

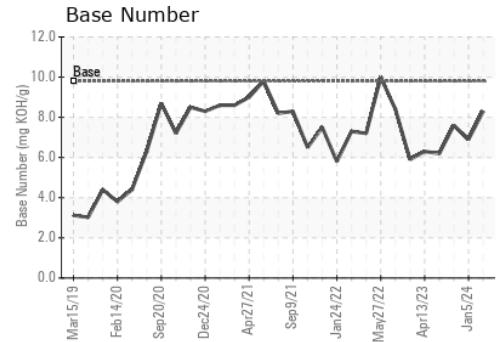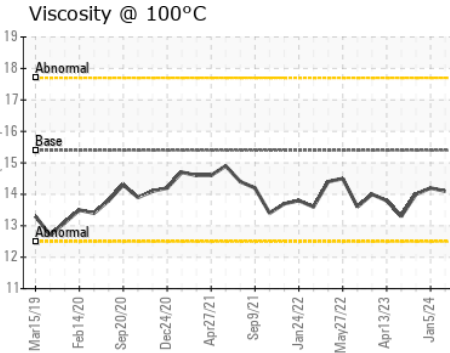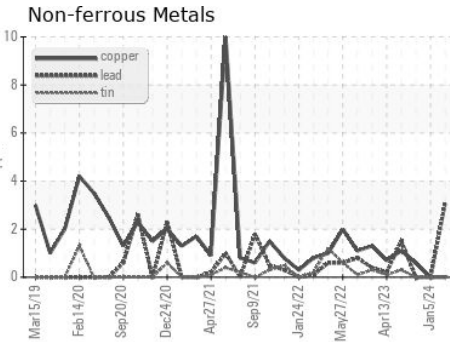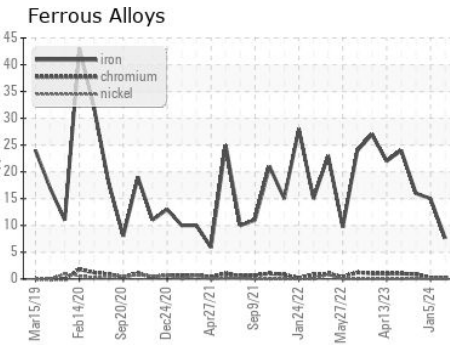

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0103190  
 Lab Number : **06108537**  
 Unique Number : 10912034  
 Test Package : FLEET

Received : 05 Mar 2024  
 Tested : 06 Mar 2024  
 Diagnosed : 06 Mar 2024 - Wes Davis

GFL Environmental - 001 - Raleigh(CNG)  
 3741 Conquest Drive  
 Garner, NC  
 US 27529

Contact: Craig Johnson  
 craig.johnson@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)662-7100  
 F: (919)662-7130