




# OIL ANALYSIS REPORT

Sample Rating Trend

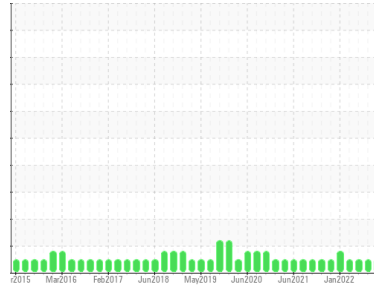

**NORMAL**



Machine Id  
**10512C AUTOCAR ACX**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (28 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0103193</b>	GFL0087126	GFL0056541
Sample Date	Client Info	<b>04 Mar 2024</b>	12 Jul 2023	03 Oct 2022
Machine Age	hrs	<b>5849</b>	4294	2300
Oil Age	hrs	<b>0</b>	0	966
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>18</b>	11	12
Chromium	ppm ASTM D5185m >4	<b>2</b>	1	2
Nickel	ppm ASTM D5185m >2	<b>1</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >9	<b>5</b>	4	4
Lead	ppm ASTM D5185m >30	<b>17</b>	3	3
Copper	ppm ASTM D5185m >35	<b>&lt;1</b>	<1	2
Tin	ppm ASTM D5185m >4	<b>1</b>	<1	2
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>12</b>	9	8
Barium	ppm ASTM D5185m 5	<b>0</b>	2	0
Molybdenum	ppm ASTM D5185m 50	<b>62</b>	58	54
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 560	<b>749</b>	550	570
Calcium	ppm ASTM D5185m 1510	<b>1961</b>	1738	1684
Phosphorus	ppm ASTM D5185m 780	<b>933</b>	717	701
Zinc	ppm ASTM D5185m 870	<b>1169</b>	1033	938
Sulfur	ppm ASTM D5185m 2040	<b>2855</b>	2700	2911

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	<b>5</b>	13	9
Sodium	ppm ASTM D5185m	<b>7</b>	7	8
Potassium	ppm ASTM D5185m >20	<b>6</b>	5	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>13.4</b>	11.8	12.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>28.7</b>	24.5	26.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>24.0</b>	20.4	22.2
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>4.3</b>	4.8	5.94







# OIL ANALYSIS REPORT

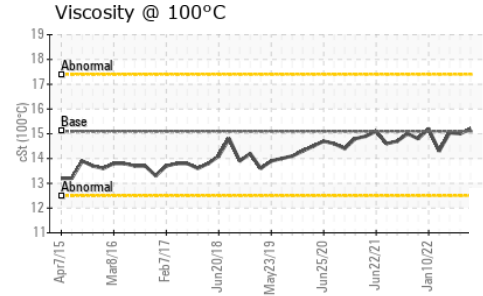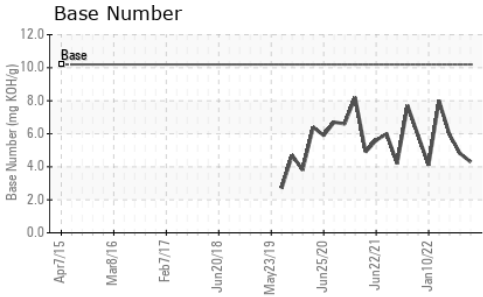

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>15.2</b>	15.0	15.04

## GRAPHS

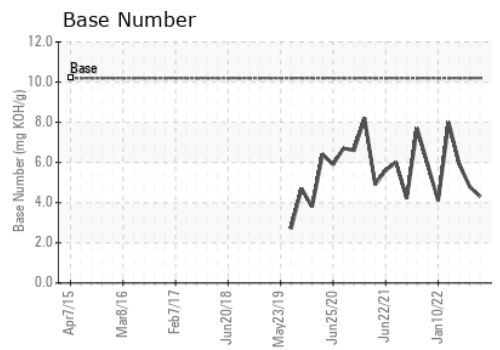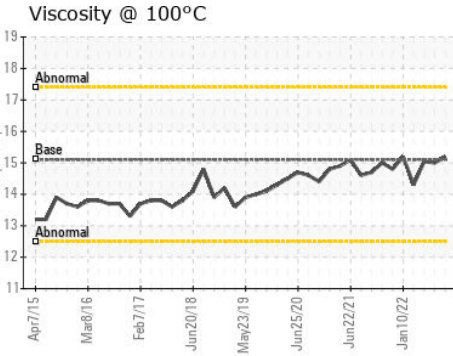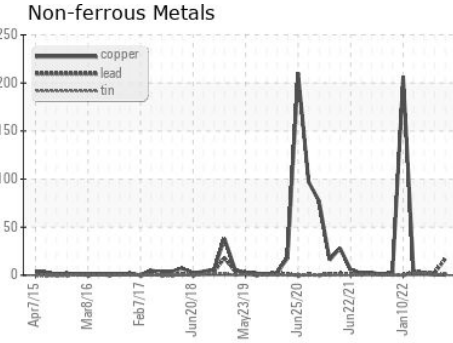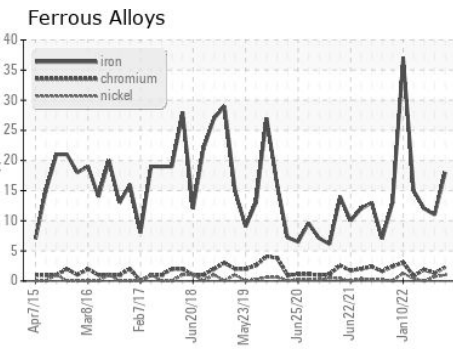

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103193  
**Lab Number** : 06108538  
**Unique Number** : 10912035  
**Test Package** : FLEET  
**Received** : 05 Mar 2024  
**Tested** : 06 Mar 2024  
**Diagnosed** : 06 Mar 2024 - Wes Davis

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)