




# OIL ANALYSIS REPORT

Sample Rating Trend

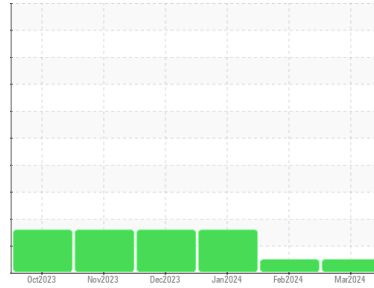

**NORMAL**



Machine Id  
**914059**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0102968</b>	GFL0074797	GFL0102982
Sample Date	Client Info	<b>04 Mar 2024</b>	13 Feb 2024	07 Jan 2024
Machine Age	hrs Client Info	<b>922</b>	833	623
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>8</b>	10	44
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	1
Nickel	ppm ASTM D5185m >4	<b>1</b>	<1	7
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	1	<1
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	6
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>42</b>	46	185
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	4
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>16</b>	12	153
Barium	ppm ASTM D5185m 10	<b>1</b>	0	0
Molybdenum	ppm ASTM D5185m 100	<b>69</b>	64	112
Manganese	ppm ASTM D5185m	<b>0</b>	<1	4
Magnesium	ppm ASTM D5185m 450	<b>902</b>	937	678
Calcium	ppm ASTM D5185m 3000	<b>1090</b>	1088	1558
Phosphorus	ppm ASTM D5185m 1150	<b>978</b>	1022	795
Zinc	ppm ASTM D5185m 1350	<b>1178</b>	1196	945
Sulfur	ppm ASTM D5185m 4250	<b>2571</b>	3010	2552

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>7</b>	10	▲ 76
Sodium	ppm ASTM D5185m >216	<b>&lt;1</b>	<1	3
Potassium	ppm ASTM D5185m >20	<b>7</b>	4	8

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.2	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>7.4</b>	6.9	10.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.7</b>	19.1	24.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.9</b>	14.5	22.1
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>7.9</b>	8.2	7.0







# OIL ANALYSIS REPORT

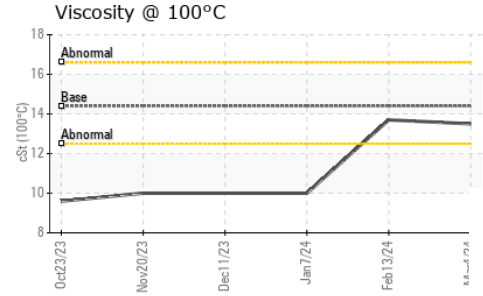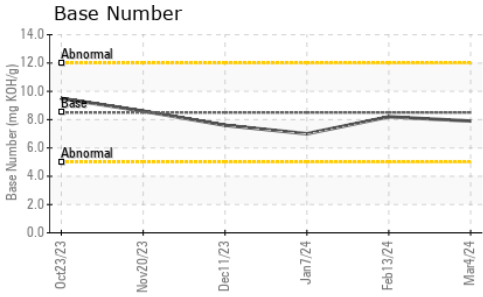

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.5</b>	13.7	10.0

## GRAPHS

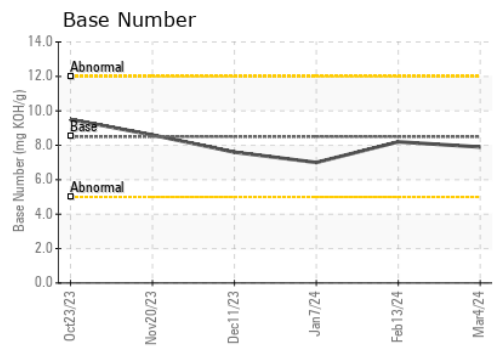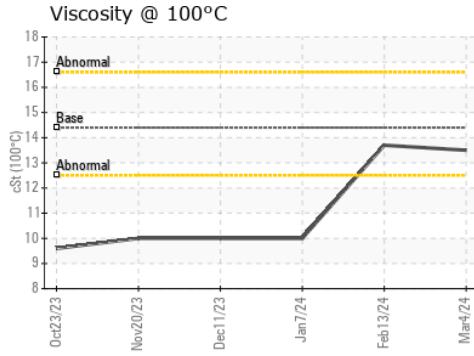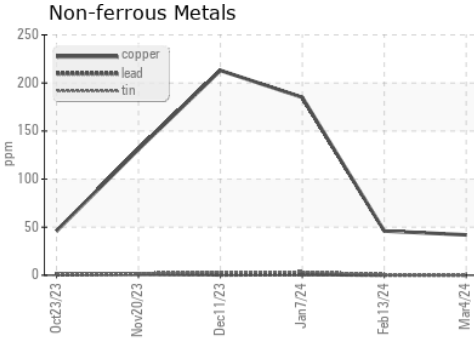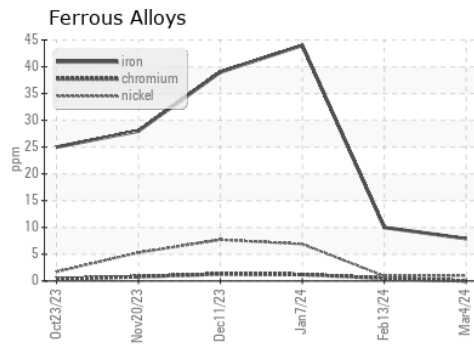

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0102968 **Received** : 05 Mar 2024  
**Lab Number** : **06109121** **Tested** : 06 Mar 2024  
**Unique Number** : 10912618 **Diagnosed** : 06 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 816 - WCA of South Arkansas**  
 3083 Smackover Hwy  
 El Dorado, AR  
 US 71730  
 Contact: Mike Howell  
 mike.howell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)