




# OIL ANALYSIS REPORT

Sample Rating Trend

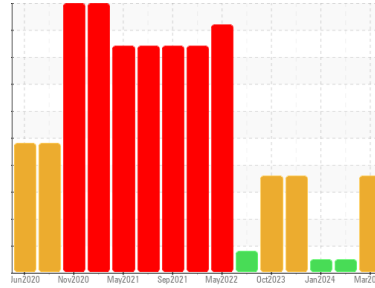

Area  
**(40957HA)**  
Machine Id  
**826028-1018**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

**Recommendation**  
We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We advise that you check the fuel injection system. Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. There is a moderate amount of fuel present in the oil.

**Fluid Condition**  
Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0111836</b>	GFL0108248	GFL0108531
Sample Date	Client Info	<b>01 Mar 2024</b>	07 Feb 2024	19 Jan 2024
Machine Age	hrs	<b>18046</b>	17751	0
Oil Age	hrs	<b>295</b>	14895	0
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	N/A
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>34</b>	32	7
Chromium	ppm ASTM D5185m >4	<b>2</b>	2	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	3
Titanium	ppm ASTM D5185m >2	<b>1</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >15	<b>9</b>	2	3
Lead	ppm ASTM D5185m >50	<b>3</b>	2	0
Copper	ppm ASTM D5185m >55	<b>3</b>	6	2
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>20</b>	20	1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>45</b>	84	59
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>841</b>	1308	946
Calcium	ppm ASTM D5185m 1070	<b>1698</b>	1534	1140
Phosphorus	ppm ASTM D5185m 1150	<b>1073</b>	1342	1054
Zinc	ppm ASTM D5185m 1270	<b>1307</b>	1735	1224
Sulfur	ppm ASTM D5185m 2060	<b>3169</b>	4073	3088

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>▲ 22</b>	10	3
Sodium	ppm ASTM D5185m	<b>3</b>	4	3
Potassium	ppm ASTM D5185m >20	<b>2</b>	24	<1
Fuel	% ASTM D3524 >3.0	<b>▲ 5.3</b>	<1.0	<1.0

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.3</b>	2	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>8.7</b>	7.1	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.5</b>	20.7	19.1


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.3</b>	13.3	16.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.8</b>	8.3	7.1




# OIL ANALYSIS REPORT


## Fuel Dilution

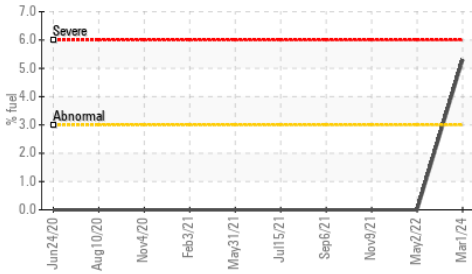


## Silicon (ppm)

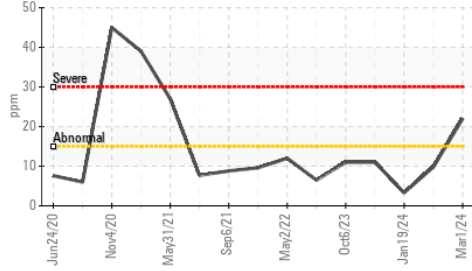


## Aluminum (ppm)

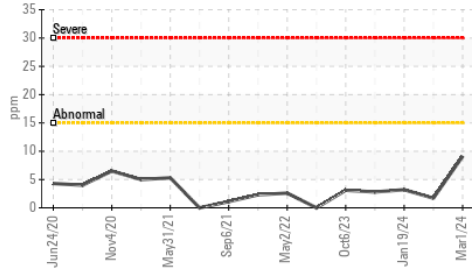

## Viscosity @ 100°C

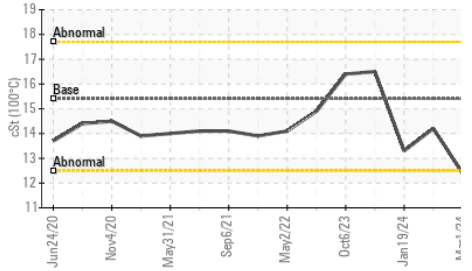

## Base Number

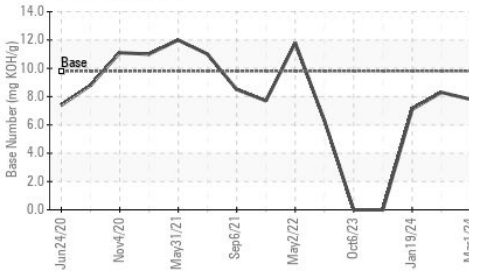

## VISUAL


method	limit/base	current	history1	history2		
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

## FLUID PROPERTIES


method	limit/base	current	history1	history2		
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.4	14.2	13.3

## GRAPHS


### Ferrous Alloys

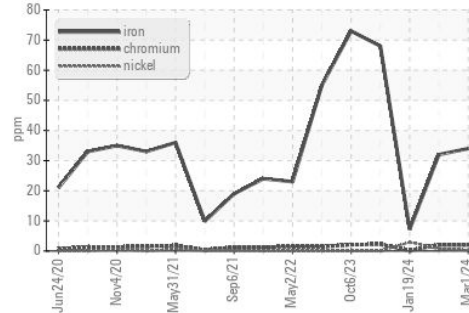


### Non-ferrous Metals

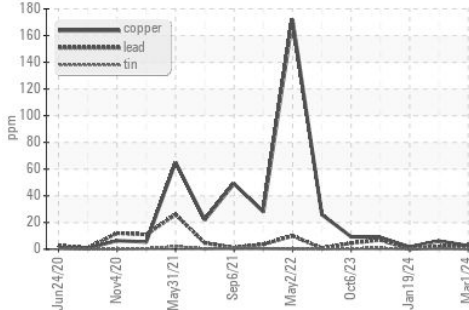

## Viscosity @ 100°C

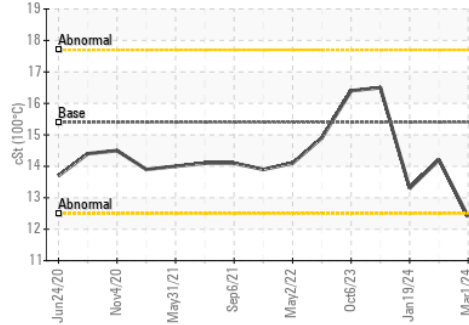

## Base Number

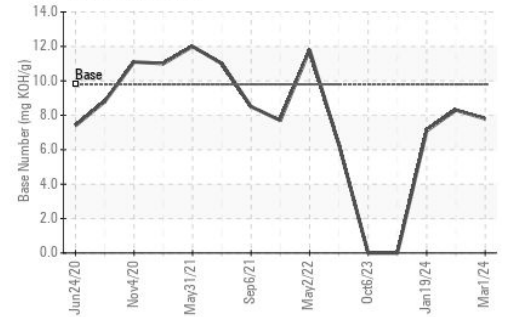

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111836

Lab Number : 06109281

Unique Number : 10912778

Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

Received : 05 Mar 2024

Tested : 08 Mar 2024

Diagnosed : 10 Mar 2024 - Doug Bogart

GFL Environmental - 652 - Fredericksburg Hauling

10954 Houser Drive

Fredericksburg, VA

US 22408

Contact: WILLIAM MILO

wmilo@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)