




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

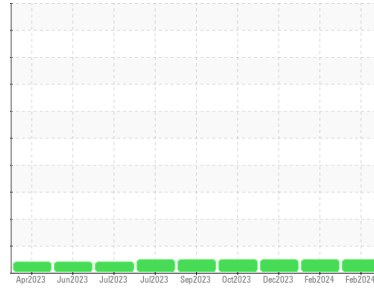

Machine Id  
**913155**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0078306</b>	GFL0099267	GFL0078292
Sample Date	Client Info		<b>28 Feb 2024</b>	05 Feb 2024	04 Dec 2023
Machine Age	hrs	Client Info	<b>2553</b>	2390	1974
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>25</b>	21	13
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>13</b>	12	8
Lead	ppm	ASTM D5185m >40	<b>3</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>3</b>	4	3
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	13	3
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	65	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	0
Magnesium	ppm	ASTM D5185m 1010	<b>1046</b>	958	867
Calcium	ppm	ASTM D5185m 1070	<b>1140</b>	1073	1000
Phosphorus	ppm	ASTM D5185m 1150	<b>1028</b>	979	923
Zinc	ppm	ASTM D5185m 1270	<b>1281</b>	1257	1095
Sulfur	ppm	ASTM D5185m 2060	<b>3022</b>	3072	2963

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	10	8
Sodium	ppm	ASTM D5185m	<b>2</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>30</b>	32	26

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.5</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.5</b>	10.2	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.5</b>	22.6	20.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.1</b>	19.0	16.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>4.5</b>	5.8	7.5







# OIL ANALYSIS REPORT

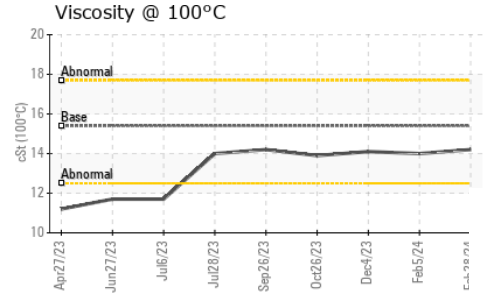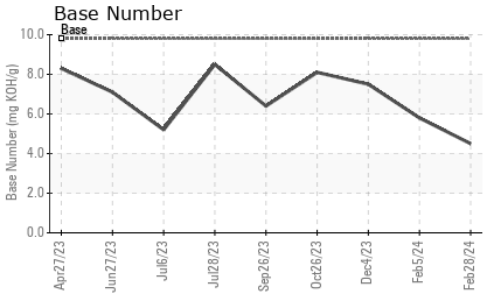

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.0	14.1

## GRAPHS

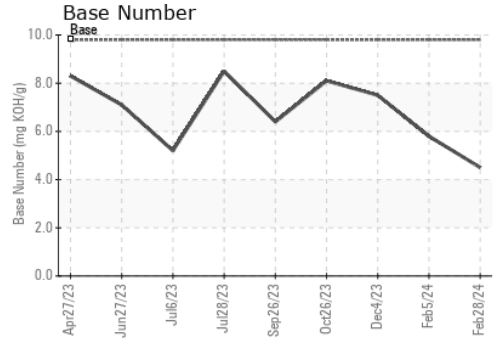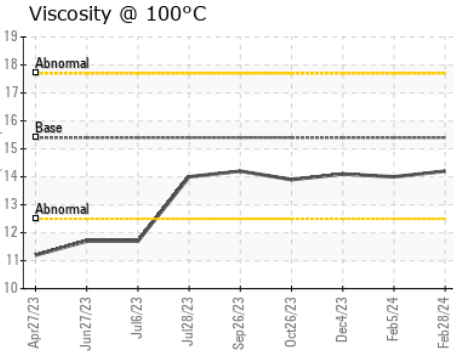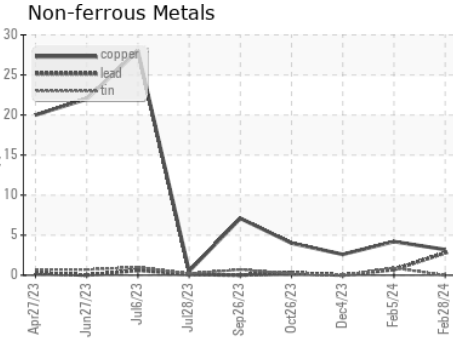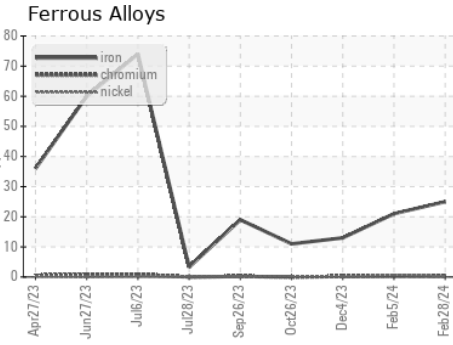

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0078306  
**Lab Number** : **06109323**  
**Unique Number** : 10912820  
**Test Package** : FLEET  
**Received** : 05 Mar 2024  
**Tested** : 06 Mar 2024  
**Diagnosed** : 06 Mar 2024 - Wes Davis

**GFL Environmental - 844 - Princeton Hauling**  
 10129 Highway 62 West  
 Princeton, KY  
 US 42445  
 Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com  
 T: (931)237-6045  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)