




# OIL ANALYSIS REPORT

Sample Rating Trend

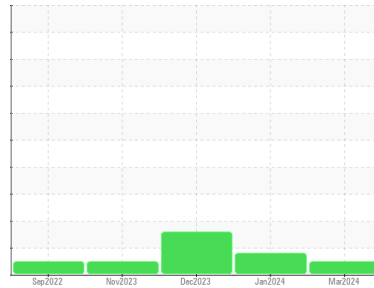

**NORMAL**



Machine Id  
**7808M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1    | history2    |
|---------------|-----------------|--------------------|-------------|-------------|
| Sample Number | Client Info     | <b>GFL0104377</b>  | GFL0109966  | GFL0104383  |
| Sample Date   | Client Info     | <b>04 Mar 2024</b> | 24 Jan 2024 | 01 Dec 2023 |
| Machine Age   | hrs Client Info | <b>12396</b>       | 12299       | 126551      |
| Oil Age       | hrs Client Info | <b>600</b>         | 600         | 125554      |
| Oil Changed   | Client Info     | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |                 | <b>NORMAL</b>      | ABNORMAL    | ABNORMAL    |

## CONTAMINATION

| method | limit/base     | current        | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel   | WC Method >3.0 | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method >0.2 | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method      | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >90  | <b>27</b>    | ▲ 95     | 27       |
| Chromium | ppm ASTM D5185m >20  | <b>&lt;1</b> | 3        | <1       |
| Nickel   | ppm ASTM D5185m >2   | <b>0</b>     | 1        | 1        |
| Titanium | ppm ASTM D5185m >2   | <b>0</b>     | 0        | <1       |
| Silver   | ppm ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm ASTM D5185m >20  | <b>3</b>     | 9        | 2        |
| Lead     | ppm ASTM D5185m >40  | <b>1</b>     | 9        | <1       |
| Copper   | ppm ASTM D5185m >330 | <b>1</b>     | 1        | 108      |
| Tin      | ppm ASTM D5185m >15  | <b>&lt;1</b> | <1       | 3        |
| Vanadium | ppm ASTM D5185m      | <b>0</b>     | <1       | 0        |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

| method     | limit/base           | current      | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>&lt;1</b> | 3        | 108      |
| Barium     | ppm ASTM D5185m 0    | <b>0</b>     | <1       | 0        |
| Molybdenum | ppm ASTM D5185m 60   | <b>59</b>    | 60       | 65       |
| Manganese  | ppm ASTM D5185m 0    | <b>0</b>     | 1        | 4        |
| Magnesium  | ppm ASTM D5185m 1010 | <b>1044</b>  | 906      | 359      |
| Calcium    | ppm ASTM D5185m 1070 | <b>1122</b>  | 1039     | 1823     |
| Phosphorus | ppm ASTM D5185m 1150 | <b>1119</b>  | 1012     | 1147     |
| Zinc       | ppm ASTM D5185m 1270 | <b>1304</b>  | 1235     | 1316     |
| Sulfur     | ppm ASTM D5185m 2060 | <b>3286</b>  | 2404     | 4368     |

## CONTAMINANTS

| method    | limit/base          | current  | history1 | history2 |
|-----------|---------------------|----------|----------|----------|
| Silicon   | ppm ASTM D5185m >25 | <b>4</b> | 10       | ▲ 27     |
| Sodium    | ppm ASTM D5185m     | <b>5</b> | 8        | 0        |
| Potassium | ppm ASTM D5185m >20 | <b>2</b> | 12       | 4        |

## INFRA-RED



| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >6         | <b>0.4</b>  | 1.2      | 0.1      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>7.5</b>  | 16.3     | 5.8      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>19.9</b> | 30.3     | 17.9     |

## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>16.7</b> | 35.4     | 13.7     |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>8.6</b>  | 5.5      | 8.8      |







# OIL ANALYSIS REPORT

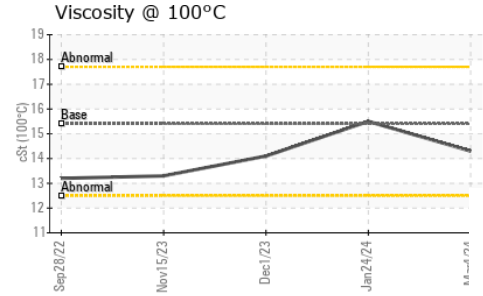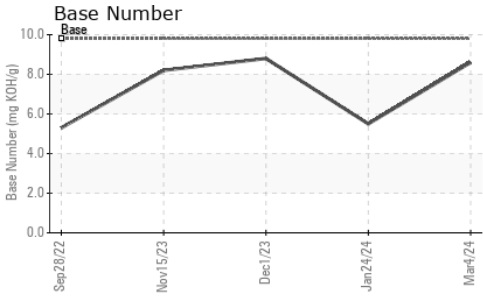

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>14.3</b> | 15.5     | 14.1 |

## GRAPHS

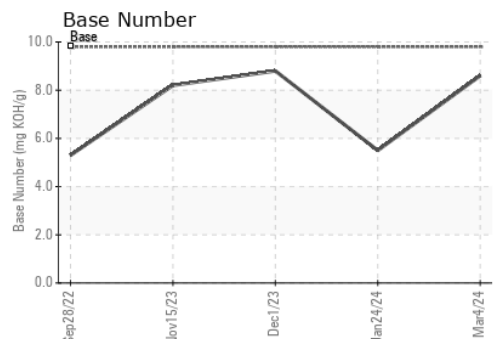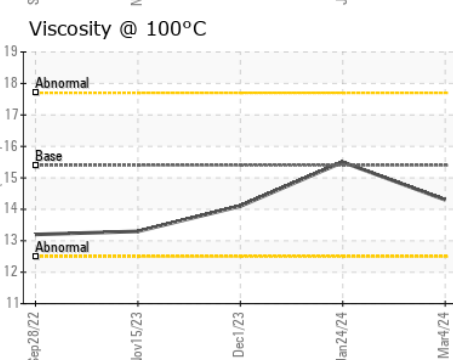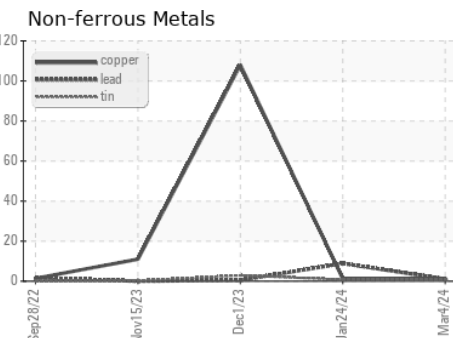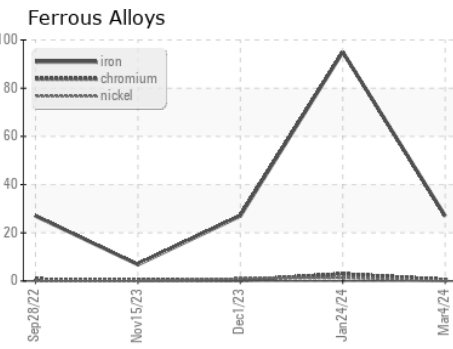

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104377  
**Lab Number** : **06109828**  
**Unique Number** : 10913325  
**Test Package** : FLEET  
**Received** : 06 Mar 2024  
**Tested** : 07 Mar 2024  
**Diagnosed** : 07 Mar 2024 - Wes Davis

**GFL Environmental - 410 - Michigan West**  
 39000 Van Born Rd  
 Wayne, MI  
 US 48184  
 Contact: Belal Dgheish  
 bdgheish@gflenv.com  
 T: (734)714-2340  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)