



OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL



Machine Id
425121
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

▲ Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | GFL0104267 | --- | --- |
| Sample Date | Client Info | | 04 Mar 2024 | --- | --- |
| Machine Age | hrs | Client Info | 16603 | --- | --- |
| Oil Age | hrs | Client Info | 600 | --- | --- |
| Oil Changed | Client Info | | Changed | --- | --- |
| Sample Status | | | ABNORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | --- | --- |
| Water | WC Method | >0.2 | NEG | --- | --- |
| Glycol | WC Method | | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|------------|----------|----------|
| Iron | ppm | ASTM D5185m >120 | 111 | --- | --- |
| Chromium | ppm | ASTM D5185m >20 | 2 | --- | --- |
| Nickel | ppm | ASTM D5185m >5 | 3 | --- | --- |
| Titanium | ppm | ASTM D5185m >2 | 15 | --- | --- |
| Silver | ppm | ASTM D5185m >2 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >20 | 6 | --- | --- |
| Lead | ppm | ASTM D5185m >40 | 1 | --- | --- |
| Copper | ppm | ASTM D5185m >330 | 3 | --- | --- |
| Tin | ppm | ASTM D5185m >15 | 2 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 7 | --- | --- |
| Barium | ppm | ASTM D5185m 0 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m 60 | 28 | --- | --- |
| Manganese | ppm | ASTM D5185m 0 | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m 1010 | 760 | --- | --- |
| Calcium | ppm | ASTM D5185m 1070 | 1356 | --- | --- |
| Phosphorus | ppm | ASTM D5185m 1150 | 1107 | --- | --- |
| Zinc | ppm | ASTM D5185m 1270 | 1248 | --- | --- |
| Sulfur | ppm | ASTM D5185m 2060 | 3294 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 11 | --- | --- |
| Sodium | ppm | ASTM D5185m | 56 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 17 | --- | --- |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >4 | 0.8 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 >20 | 18.3 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 34.3 | --- | --- |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|--------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 41.5 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8 | ▲ 3.5 | --- | --- |




OIL ANALYSIS REPORT


Glycol Contamination

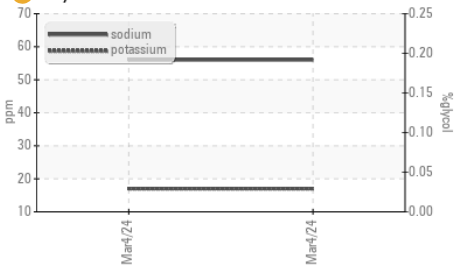

Glycol Contamination

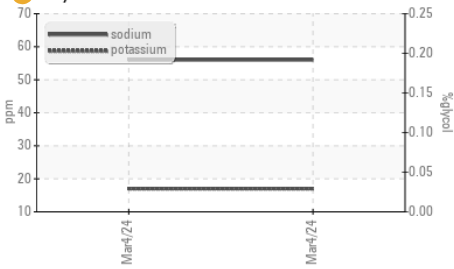

Viscosity @ 100°C

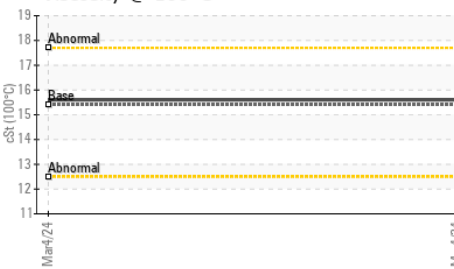


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 15.6 | --- |

GRAPHS


Ferrous Alloys

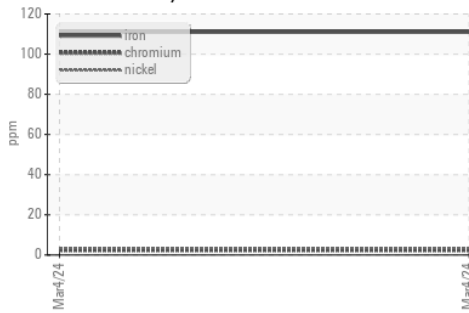


Non-ferrous Metals

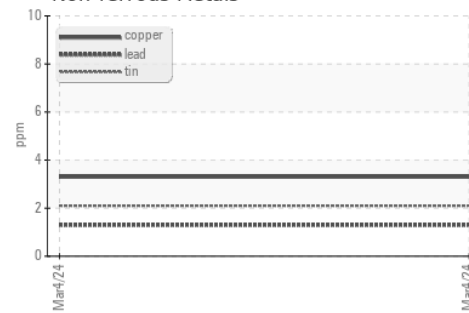

Viscosity @ 100°C

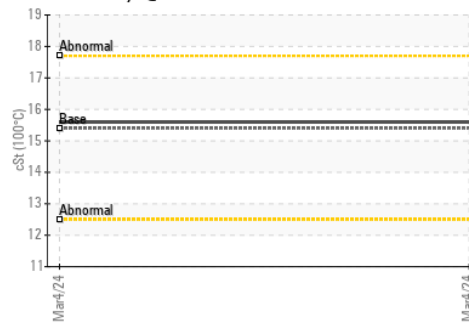

Base Number

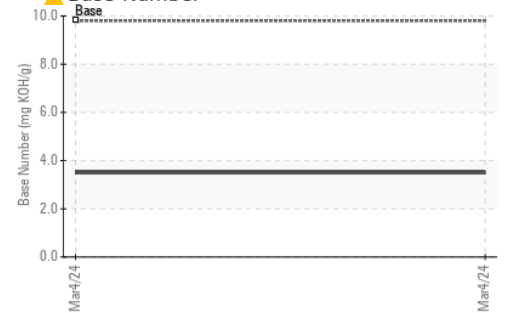

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0104267

Lab Number : 06109845

Unique Number : 10913342

Test Package : FLEET

Received : 06 Mar 2024

Tested : 07 Mar 2024

Diagnosed : 08 Mar 2024 - Don Baldrige

GFL Environmental - 410 - Michigan West

39000 Van Born Rd

Wayne, MI

US 48184

Contact: Belal Dgheish

bdgheish@gflenv.com

T: (734)714-2340

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)