




# OIL ANALYSIS REPORT

Sample Rating Trend

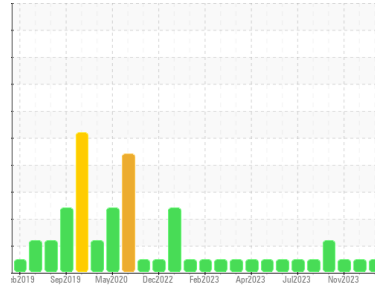

**NORMAL**



Machine Id  
**722024-310036**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>GFL0109808</b>  | GFL0099910  | GFL0095167  |
| Sample Date   | Client Info | <b>04 Mar 2024</b> | 05 Dec 2023 | 08 Nov 2023 |
| Machine Age   | hrs         | <b>20151</b>       | 20082       | 19937       |
| Oil Age       | hrs         | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info | <b>Not Changed</b> | Not Changed | Not Changed |
| Sample Status |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base     | current    | history1 | history2 |
|--------|----------------|------------|----------|----------|
| Water  | WC Method >0.2 | <b>NEG</b> | NEG      | NEG      |
| Glycol | WC Method      | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >110 | <b>3</b>     | 9        | 9        |
| Chromium | ppm ASTM D5185m >4   | <b>0</b>     | <1       | <1       |
| Nickel   | ppm ASTM D5185m >2   | <b>0</b>     | <1       | <1       |
| Titanium | ppm ASTM D5185m      | <b>0</b>     | 0        | <1       |
| Silver   | ppm ASTM D5185m >2   | <b>0</b>     | 0        | <1       |
| Aluminum | ppm ASTM D5185m >25  | <b>&lt;1</b> | 2        | 2        |
| Lead     | ppm ASTM D5185m >45  | <b>0</b>     | 0        | <1       |
| Copper   | ppm ASTM D5185m >85  | <b>0</b>     | <1       | <1       |
| Tin      | ppm ASTM D5185m >4   | <b>&lt;1</b> | 0        | <1       |
| Vanadium | ppm ASTM D5185m      | <b>0</b>     | 0        | <1       |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | 0        | <1       |

## ADDITIVES

| method     | limit/base           | current     | history1 | history2 |
|------------|----------------------|-------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>18</b>   | 6        | 5        |
| Barium     | ppm ASTM D5185m 0    | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm ASTM D5185m 60   | <b>59</b>   | 58       | 61       |
| Manganese  | ppm ASTM D5185m 0    | <b>0</b>    | <1       | <1       |
| Magnesium  | ppm ASTM D5185m 1010 | <b>969</b>  | 912      | 891      |
| Calcium    | ppm ASTM D5185m 1070 | <b>1228</b> | 1065     | 1081     |
| Phosphorus | ppm ASTM D5185m 1150 | <b>1132</b> | 1045     | 1023     |
| Zinc       | ppm ASTM D5185m 1270 | <b>1299</b> | 1276     | 1202     |
| Sulfur     | ppm ASTM D5185m 2060 | <b>3472</b> | 3174     | 3121     |

## CONTAMINANTS

| method    | limit/base          | current    | history1 | history2 |
|-----------|---------------------|------------|----------|----------|
| Silicon   | ppm ASTM D5185m >30 | <b>4</b>   | 2        | 3        |
| Sodium    | ppm ASTM D5185m     | <b>2</b>   | 3        | 0        |
| Potassium | ppm ASTM D5185m >20 | <b>0</b>   | 3        | 3        |
| Fuel      | % ASTM D3524 >5     | <b>0.4</b> | <1.0     | <1.0     |

## INFRA-RED




| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>0.1</b>  | 0.5      | 0.5      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>4.3</b>  | 6.6      | 6.4      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>17.5</b> | 19.2     | 19.4     |

## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>12.9</b> | 14.7     | 15.0     |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>9.7</b>  | 8.7      | 8.7      |







# OIL ANALYSIS REPORT

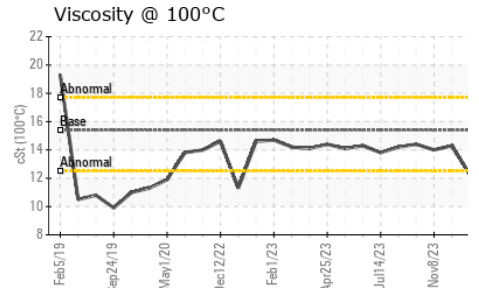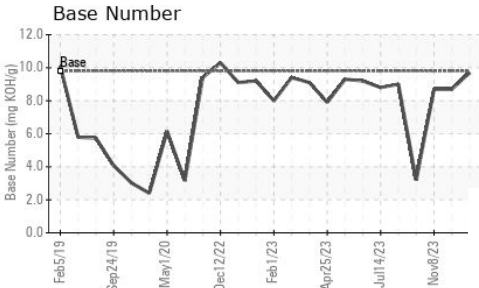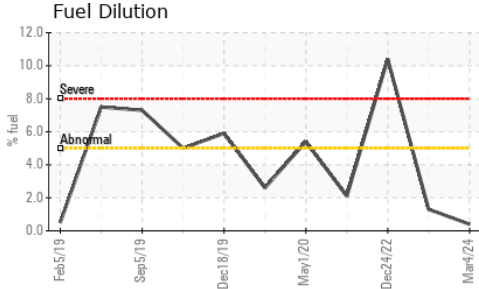

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 12.3     | 14.3     |

## GRAPHS

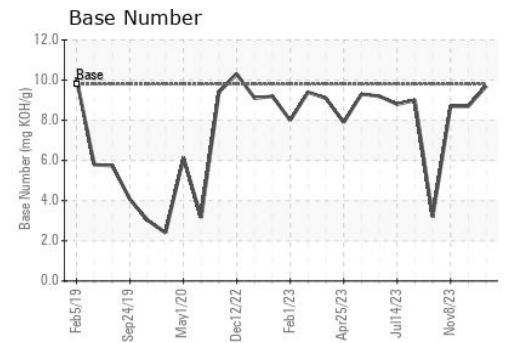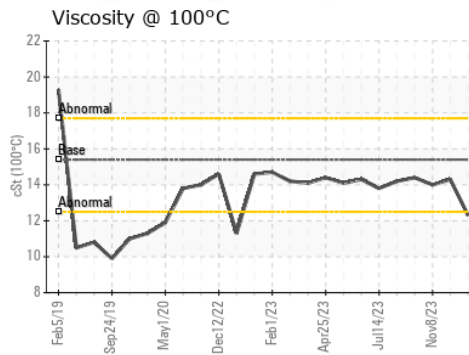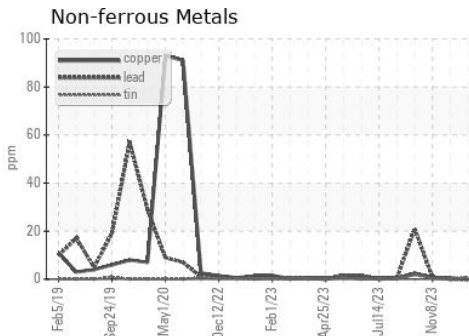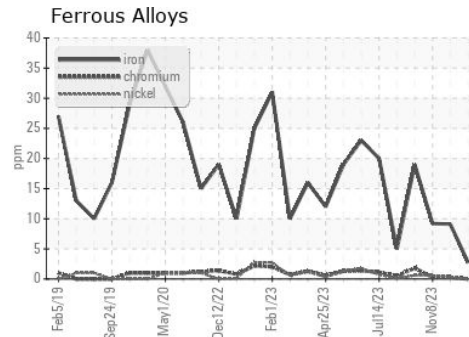

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0109808  
 Lab Number : 06109867  
 Unique Number : 10913364  
 Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

GFL Environmental - 836 - Kansas City Hauling  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: