




# OIL ANALYSIS REPORT

Sample Rating Trend

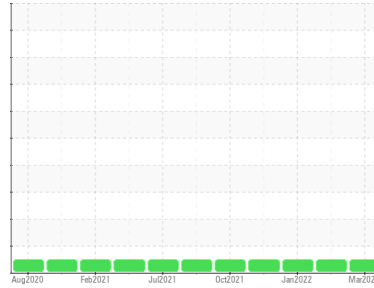

**NORMAL**



Area  
**(YA152764)**  
 Machine Id  
**AUTOCAR 810007**

Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0111376</b>	GFL0049615	GFL0041882
Sample Date	Client Info		<b>04 Mar 2024</b>	05 Apr 2022	04 Jan 2022
Machine Age	hrs	Client Info	<b>11267</b>	6089	5379
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>8</b>	21	16
Chromium	ppm	ASTM D5185m >5	<b>0</b>	1	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	3	3
Lead	ppm	ASTM D5185m >25	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >100	<b>0</b>	1	2
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	7	5
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	60	56
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>797</b>	971	777
Calcium	ppm	ASTM D5185m 1070	<b>1097</b>	1103	1096
Phosphorus	ppm	ASTM D5185m 1150	<b>956</b>	1041	921
Zinc	ppm	ASTM D5185m 1270	<b>1158</b>	1208	1178
Sulfur	ppm	ASTM D5185m 2060	<b>2746</b>	2627	2773

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>2</b>	6	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.3</b>	0.8	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.9</b>	10.1	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	22.0	20.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.6</b>	19.1	17
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.1</b>	8.2	7.9







# OIL ANALYSIS REPORT

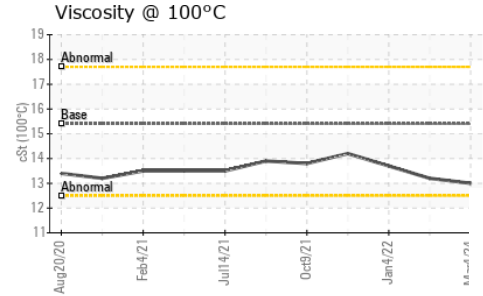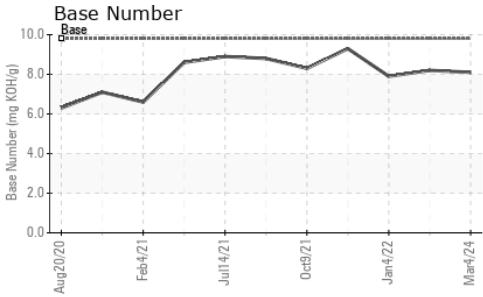

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	13.2	13.7

## GRAPHS

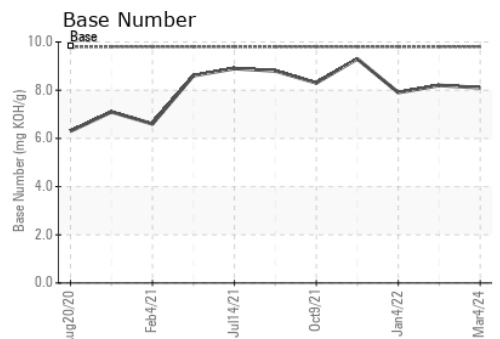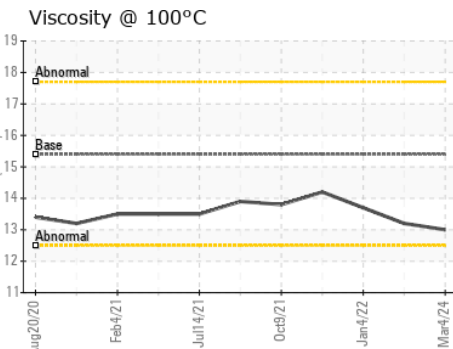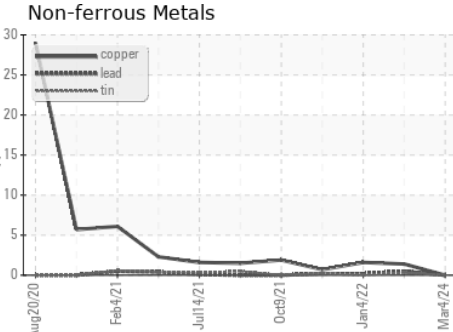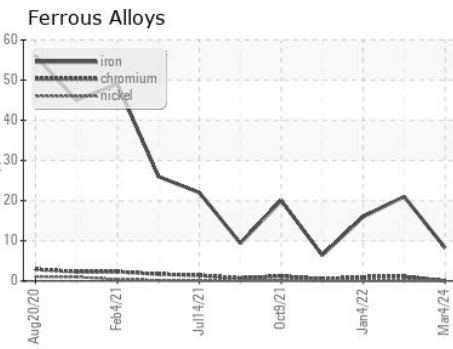

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111376  
**Lab Number** : 06109909  
**Unique Number** : 10913406  
**Test Package** : FLEET  
**Received** : 06 Mar 2024  
**Tested** : 07 Mar 2024  
**Diagnosed** : 07 Mar 2024 - Wes Davis

**GFL Environmental - 004 - Newport - Central Coast**  
 427 Roberts Road  
 Newport, NC  
 US 28570  
 Contact: Marquis Williams  
 marquis.williams@gflenv.com  
 T:  
 F: (252)223-6010

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)