




OIL ANALYSIS REPORT

Sample Rating Trend

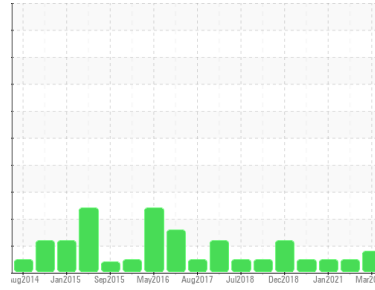

WEAR



Area
(YA117978)
Machine Id
AUTOCAR 3516
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (45 GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The copper level is abnormal. Elemental level of copper (Cu) probably due to leaching of copper from copper components (i.e. cooling core) by the oil additives.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0111393	GFL0022244	GFL0015065
Sample Date	Client Info		01 Mar 2024	12 Apr 2021	08 Jan 2021
Machine Age	hrs	Client Info	24917	17096	171300
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	Not Changd	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>75	65	20	34
Chromium	ppm	ASTM D5185m	>5	3	<1	2
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m	>2	0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>15	8	2	10
Lead	ppm	ASTM D5185m	>25	0	<1	<1
Copper	ppm	ASTM D5185m	>100	▲ 111	1	2
Tin	ppm	ASTM D5185m	>4	<1	0	0
Antimony	ppm	ASTM D5185m		---	0	5
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	1	9	6
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	62	61	58
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	920	904	990
Calcium	ppm	ASTM D5185m	1070	1051	1035	1084
Phosphorus	ppm	ASTM D5185m	1150	933	1006	1007
Zinc	ppm	ASTM D5185m	1270	1174	1171	1154
Sulfur	ppm	ASTM D5185m	2060	2164	2579	2352

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	7	4	10
Sodium	ppm	ASTM D5185m		4	6	8
Potassium	ppm	ASTM D5185m	>20	<1	<1	2

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	1.1	0.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	10.4	8.5	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	21.6	23.3


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.2	16.9	19.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.2	9.3	7.4




OIL ANALYSIS REPORT


▲ Non-ferrous Metals

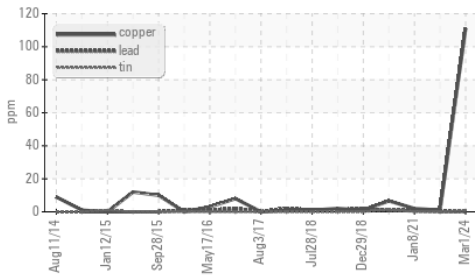

Base Number

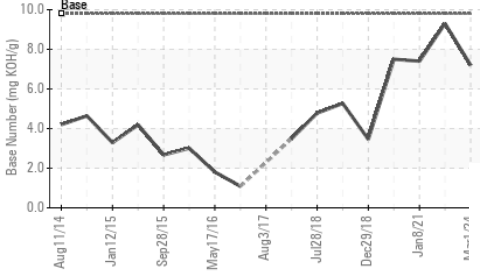

Viscosity @ 100°C

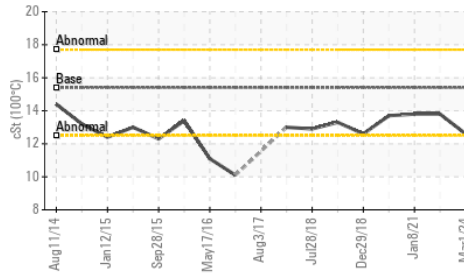

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.6	13.8

GRAPHS


Ferrous Alloys

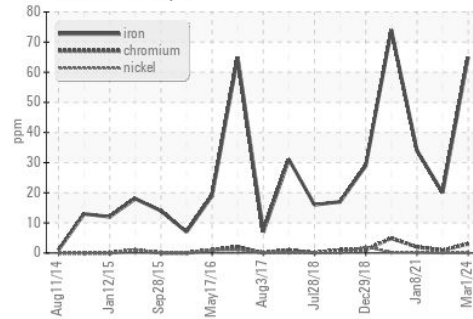


▲ Non-ferrous Metals

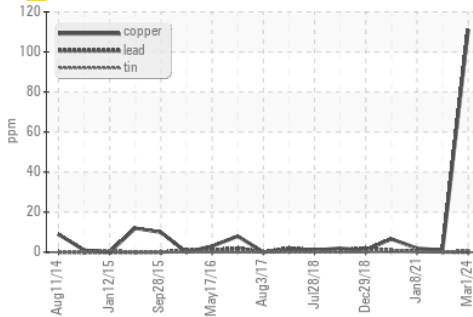

Viscosity @ 100°C

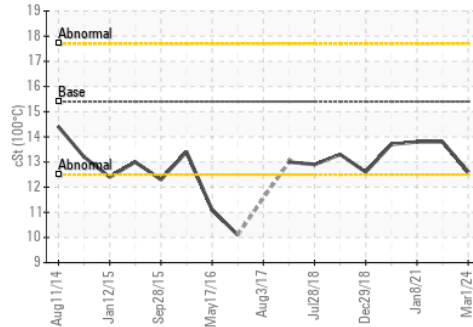

Base Number

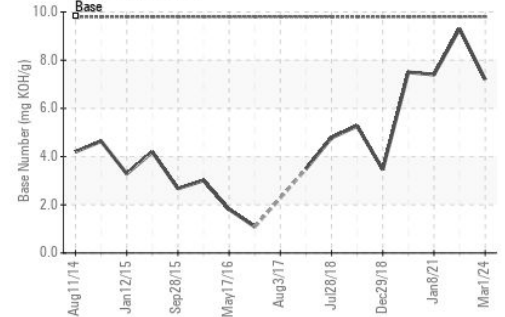

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0111393
 Lab Number : 06109910
 Unique Number : 10913407
 Test Package : FLEET

Received : 06 Mar 2024
 Tested : 07 Mar 2024
 Diagnosed : 08 Mar 2024 - Don Baldrige

GFL Environmental - 004 - Newport - Central Coast
 427 Roberts Road
 Newport, NC
 US 28570

Contact: Marquis Williams
 marquis.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (252)223-6010