




# OIL ANALYSIS REPORT

Sample Rating Trend

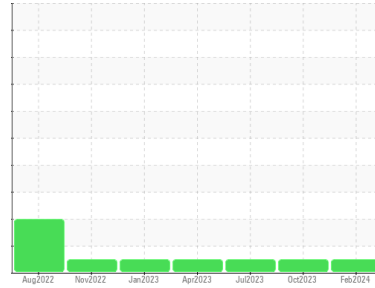

**NORMAL**



Area  
**(YA163282)**

Machine Id  
**812007**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0090056</b>	GFL0080531	GFL0071555
Sample Date	Client Info	<b>10 Feb 2024</b>	24 Oct 2023	11 Jul 2023
Machine Age	hrs	Client Info	<b>820</b>	0
Oil Age	hrs	Client Info	<b>820</b>	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG
Glycol	WC Method		<b>NEG</b>	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	<b>21</b>	20
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0
Aluminum	ppm	ASTM D5185m	>20	<b>17</b>	21
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0
Copper	ppm	ASTM D5185m	>330	<b>0</b>	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>2</b>	4
Barium	ppm	ASTM D5185m	10	<b>0</b>	3
Molybdenum	ppm	ASTM D5185m	100	<b>64</b>	81
Manganese	ppm	ASTM D5185m		<b>0</b>	0
Magnesium	ppm	ASTM D5185m	450	<b>994</b>	1126
Calcium	ppm	ASTM D5185m	3000	<b>1114</b>	1362
Phosphorus	ppm	ASTM D5185m	1150	<b>1107</b>	1331
Zinc	ppm	ASTM D5185m	1350	<b>1308</b>	1544
Sulfur	ppm	ASTM D5185m	4250	<b>2794</b>	4207

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	5
Sodium	ppm	ASTM D5185m	>216	<b>5</b>	4
Potassium	ppm	ASTM D5185m	>20	<b>25</b>	35

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	<b>0.5</b>	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.5</b>	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.0</b>	20.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.9</b>	16.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.0</b>	7.8







# OIL ANALYSIS REPORT

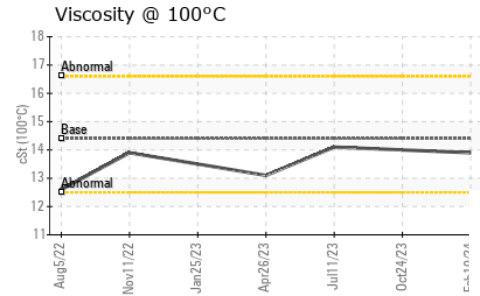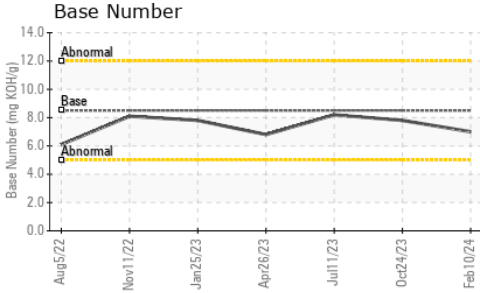

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	14.0

## GRAPHS

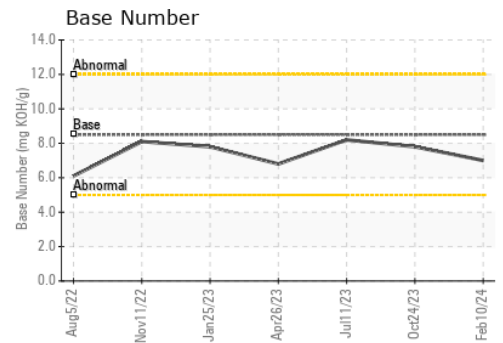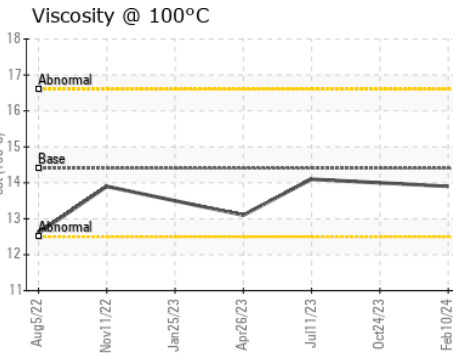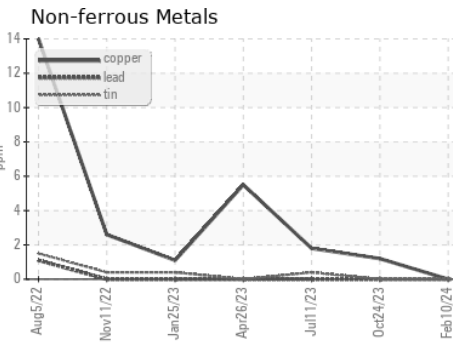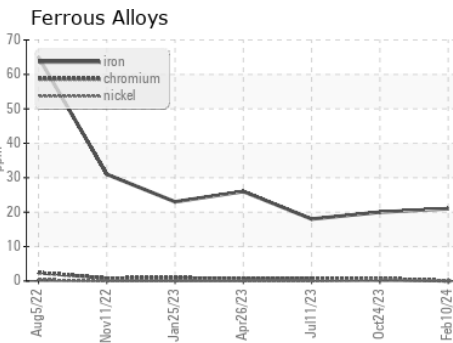

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0090056  
 Lab Number : 06109979  
 Unique Number : 10913476  
 Test Package : FLEET

Received : 06 Mar 2024  
 Tested : 07 Mar 2024  
 Diagnosed : 07 Mar 2024 - Wes Davis

GFL Environmental - 018 - Fayetteville  
 4621 Marracco Drive  
 Hope Mills, NC  
 US 28348

Contact: Robert Carter  
 robert.carter@gflenv.com

T: (910)596-1170

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)