




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(YA163862)**  
Machine Id  
**12009**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

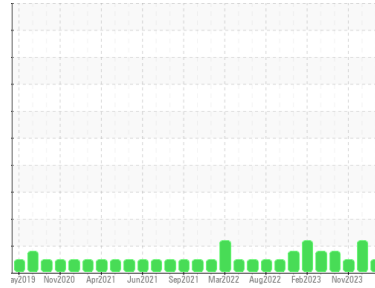

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090012</b>	GFL0099831	GFL0099814
Sample Date	Client Info		<b>05 Mar 2024</b>	10 Feb 2024	22 Nov 2023
Machine Age	hrs	Client Info	<b>15305</b>	15812	15305
Oil Age	hrs	Client Info	<b>0</b>	200	78395
Oil Changed	Client Info		<b>Not Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>10</b>	39	17
Chromium	ppm	ASTM D5185m >20	<b>0</b>	2	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	13	6
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>0</b>	2	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	4	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	81	62
Manganese	ppm	ASTM D5185m 0	<b>0</b>	1	0
Magnesium	ppm	ASTM D5185m 1010	<b>880</b>	1313	949
Calcium	ppm	ASTM D5185m 1070	<b>1015</b>	1417	1113
Phosphorus	ppm	ASTM D5185m 1150	<b>1036</b>	1498	1067
Zinc	ppm	ASTM D5185m 1270	<b>1183</b>	1666	1272
Sulfur	ppm	ASTM D5185m 2060	<b>2885</b>	5184	3314

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	13	6
Sodium	ppm	ASTM D5185m	<b>4</b>	11	4
Potassium	ppm	ASTM D5185m >20	<b>27</b>	▲ 121	30

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.2</b>	0.8	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.5</b>	10.7	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	20.2	19.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.3</b>	17.3	15.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	7.7	8.8







# OIL ANALYSIS REPORT

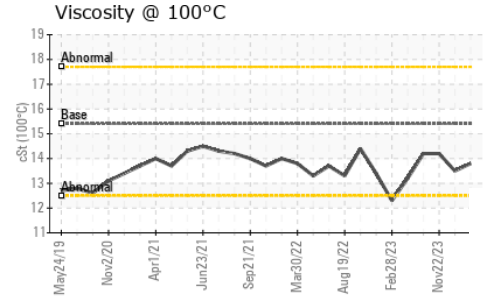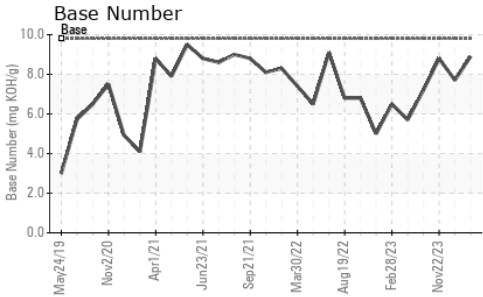

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	13.5	14.2

## GRAPHS

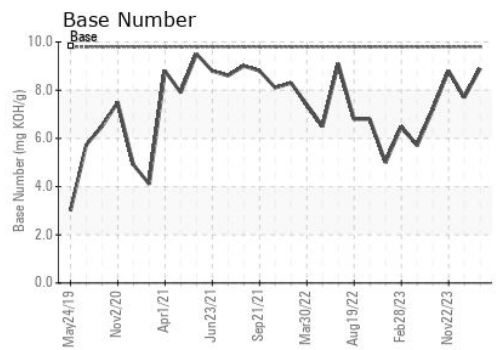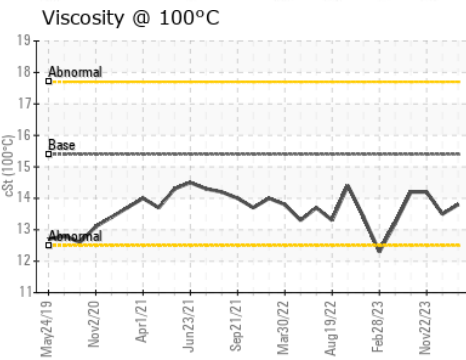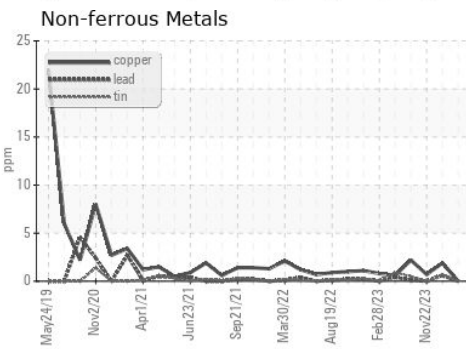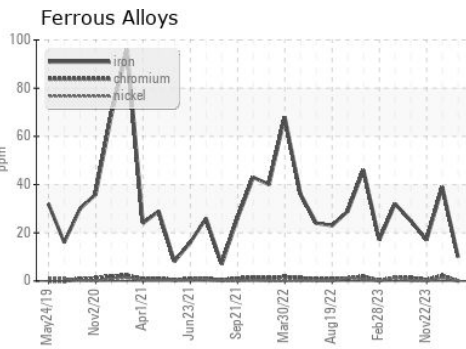

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0090012      **Received** : 06 Mar 2024  
**Lab Number** : **06109981**      **Tested** : 07 Mar 2024  
**Unique Number** : 10913478      **Diagnosed** : 07 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 018 - Fayetteville**  
 4621 Marracco Drive  
 Hope Mills, NC  
 US 28348  
 Contact: Robert Carter  
 robert.carter@gflenv.com  
 T: (910)596-1170  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)