




OIL ANALYSIS REPORT

Sample Rating Trend

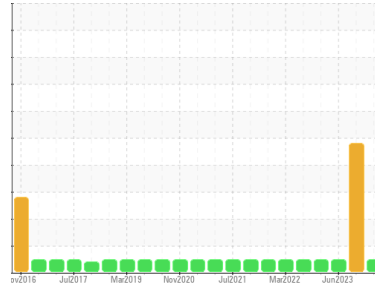

NORMAL



Area
(HH4363)

Machine Id
11263

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (4 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0099836	GFL0080607	GFL0066860	
Sample Date	Client Info	05 Mar 2024	15 Nov 2023	21 Jun 2023	
Machine Age	hrs	Client Info	13362	153874	153874
Oil Age	hrs	Client Info	0	153874	153874
Oil Changed	Client Info	N/A	N/A	Changed	
Sample Status		NORMAL	ABNORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	14	83	18
Chromium	ppm ASTM D5185m >20	<1	14	<1
Nickel	ppm ASTM D5185m >4	<1	1	<1
Titanium	ppm ASTM D5185m	<1	<1	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	3	10	3
Lead	ppm ASTM D5185m >40	<1	2	3
Copper	ppm ASTM D5185m >330	2	▲ 257	2
Tin	ppm ASTM D5185m >15	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	4	1
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	60	55	66
Manganese	ppm ASTM D5185m 0	0	2	<1
Magnesium	ppm ASTM D5185m 1010	946	857	938
Calcium	ppm ASTM D5185m 1070	1067	1111	1131
Phosphorus	ppm ASTM D5185m 1150	1017	1035	1089
Zinc	ppm ASTM D5185m 1270	1226	1203	1281
Sulfur	ppm ASTM D5185m 2060	3139	2949	3380

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	6	▲ 52	12
Sodium	ppm ASTM D5185m	2	▲ 86	0
Potassium	ppm ASTM D5185m >20	2	▲ 1503	2

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.6	0.3	1.2
Nitration	Abs/cm *ASTM D7624 >20	8.3	8.9	10.5
Sulfation	Abs/.1mm *ASTM D7415 >30	19.0	21.0	22.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.4	14.4	17.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.1	9.9	9.8







OIL ANALYSIS REPORT

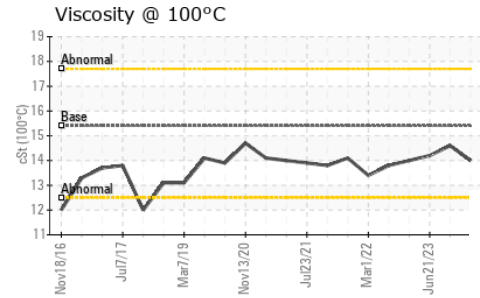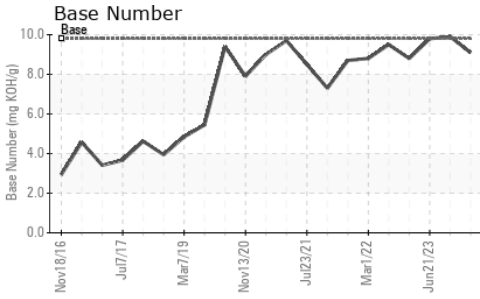

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	14.6

GRAPHS

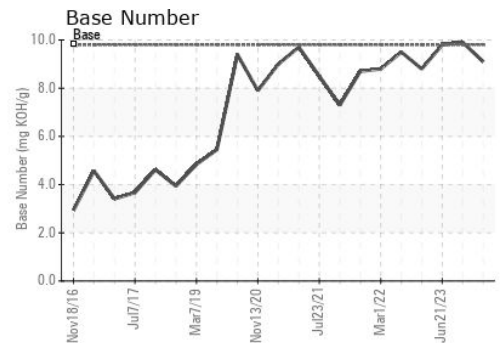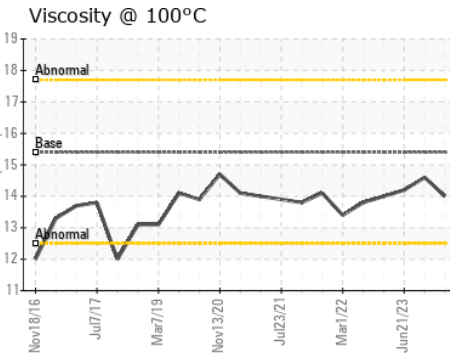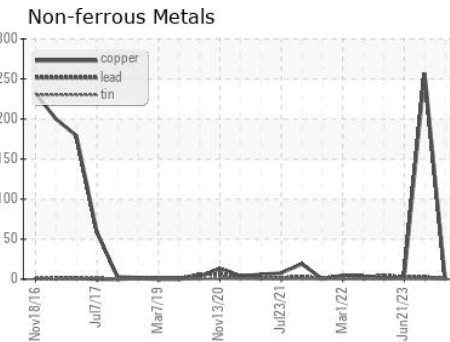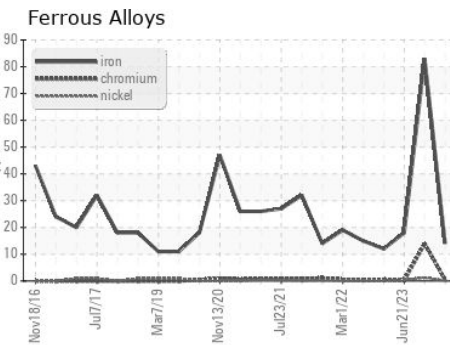

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0099836
 Lab Number : 06110000
 Unique Number : 10913497
 Test Package : FLEET

Received : 06 Mar 2024
 Tested : 07 Mar 2024
 Diagnosed : 07 Mar 2024 - Wes Davis

GFL Environmental - 018 - Fayetteville
 4621 Marracco Drive
 Hope Mills, NC
 US 28348

Contact: Robert Carter
 robert.carter@gflenv.com

T: (910)596-1170

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)