




# OIL ANALYSIS REPORT

Sample Rating Trend

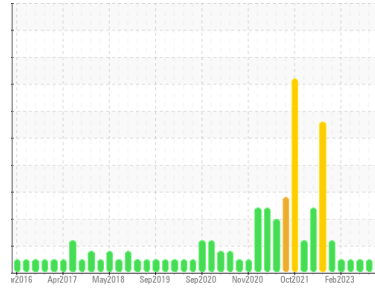

**NORMAL**



Machine Id  
**10529**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0103423</b>	GFL0074616	GFL0074611
Sample Date	Client Info	<b>03 Mar 2024</b>	12 Jan 2024	01 Aug 2023
Machine Age	hrs	<b>23585</b>	23280	22731
Oil Age	hrs	<b>0</b>	192	549
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>53</b>	26	29
Chromium	ppm ASTM D5185m >5	<b>2</b>	<1	2
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >15	<b>6</b>	3	5
Lead	ppm ASTM D5185m >25	<b>2</b>	2	1
Copper	ppm ASTM D5185m >100	<b>48</b>	9	2
Tin	ppm ASTM D5185m >4	<b>1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>34</b>	59	2
Barium	ppm ASTM D5185m 10	<b>3</b>	2	0
Molybdenum	ppm ASTM D5185m 100	<b>57</b>	56	64
Manganese	ppm ASTM D5185m	<b>3</b>	2	<1
Magnesium	ppm ASTM D5185m 450	<b>520</b>	536	897
Calcium	ppm ASTM D5185m 3000	<b>1565</b>	1531	1073
Phosphorus	ppm ASTM D5185m 1150	<b>749</b>	788	955
Zinc	ppm ASTM D5185m 1350	<b>930</b>	908	1217
Sulfur	ppm ASTM D5185m 4250	<b>2719</b>	2722	3138

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>23</b>	20	9
Sodium	ppm ASTM D5185m >158	<b>6</b>	5	23
Potassium	ppm ASTM D5185m >20	<b>4</b>	2	8

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.5</b>	0.2	1.2
Nitration	Abs/cm *ASTM D7624 >20	<b>10.5</b>	7.2	10.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.9</b>	21.3	21.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>22.0</b>	19.1	17.2
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>7.3</b>	9.6	6.7







# OIL ANALYSIS REPORT

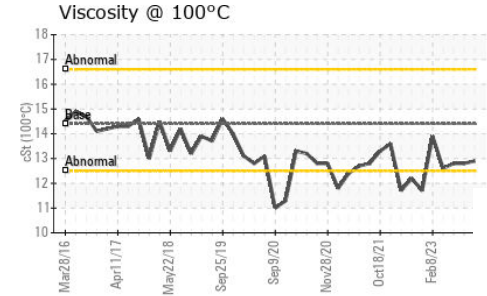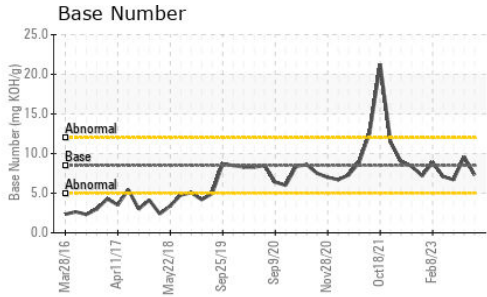

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.9</b>	12.8

## GRAPHS

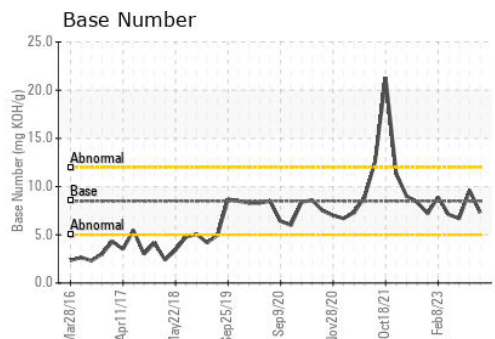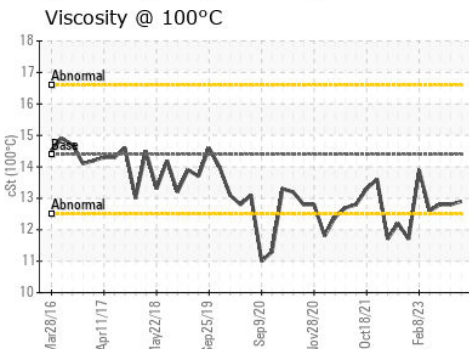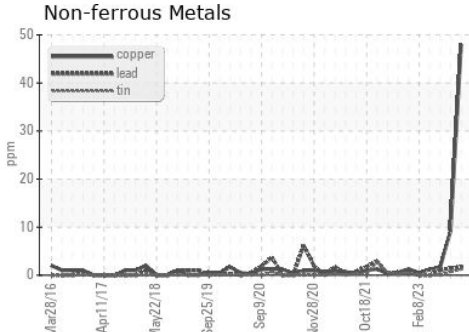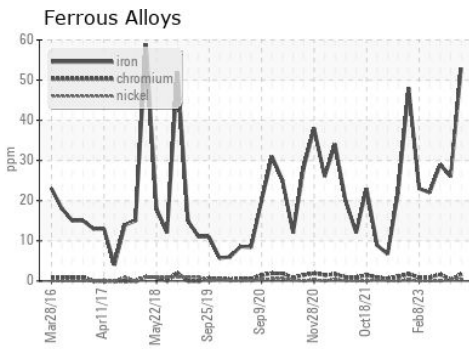

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0103423  
 Lab Number : **06110049**  
 Unique Number : 10913546  
 Test Package : FLEET

Received : 06 Mar 2024  
 Tested : 07 Mar 2024  
 Diagnosed : 07 Mar 2024 - Wes Davis

**GFL Environmental - 095 - Atlanta West**  
 2699 Cochran Industrial Blvd  
 Douglasville, GA  
 US 30127-1332  
 Contact: Darrell Welch  
 darrell.welch@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)