


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

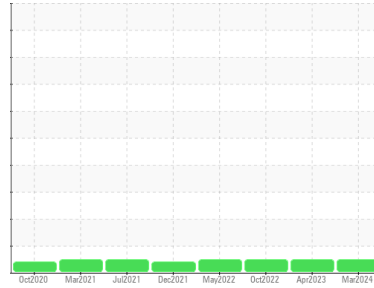

Machine Id
DT737
Component
Front Differential
Fluid
CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0116173	PCA0095675	PCA0081237
Sample Date	Client Info		02 Mar 2024	03 Apr 2023	05 Oct 2022
Machine Age	mls	Client Info	228391	152680	100769
Oil Age	mls	Client Info	65000	51911	100769
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	148	109	165
Chromium	ppm	ASTM D5185m >8	<1	<1	1
Nickel	ppm	ASTM D5185m >20	4	4	8
Titanium	ppm	ASTM D5185m >4	0	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >30	2	2	2
Lead	ppm	ASTM D5185m >25	0	0	1
Copper	ppm	ASTM D5185m >50	<1	<1	<1
Tin	ppm	ASTM D5185m >5	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	205	221	213
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	7	9	7
Manganese	ppm	ASTM D5185m	2	2	3
Magnesium	ppm	ASTM D5185m	106	106	61
Calcium	ppm	ASTM D5185m	158	165	82
Phosphorus	ppm	ASTM D5185m	1346	1323	1380
Zinc	ppm	ASTM D5185m	159	168	84
Sulfur	ppm	ASTM D5185m	20075	21177	25056


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >230	81	72	127
Sodium	ppm	ASTM D5185m	1	2	4
Potassium	ppm	ASTM D5185m >20	0	1	3

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT



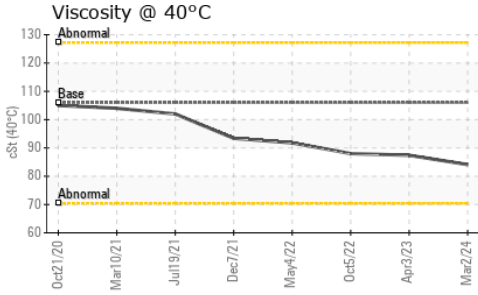


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	106	84.1	87.4	88.0

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS

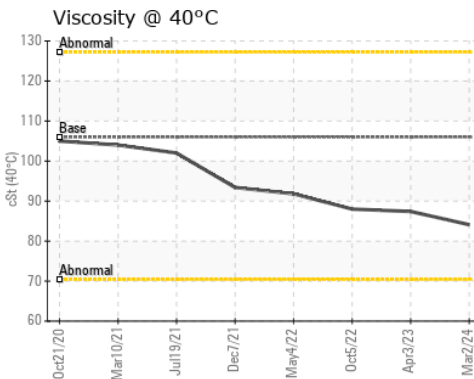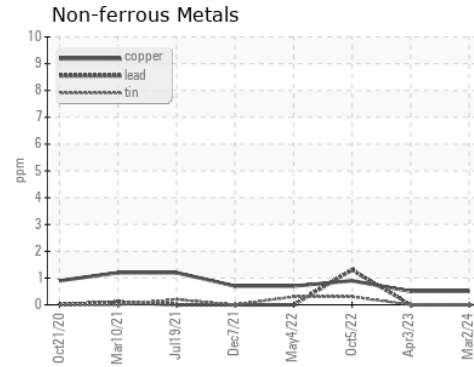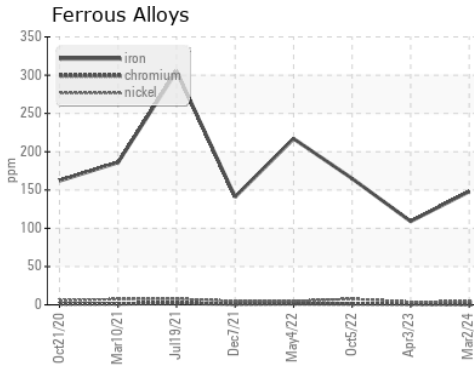

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116173
Lab Number : 06110540
Unique Number : 10914037
Test Package : FLEET
Received : 06 Mar 2024
Tested : 07 Mar 2024
Diagnosed : 07 Mar 2024 - Wes Davis

NW WHITE & CO - COLUMBIA DIVISION
 100 INDEPENDENCE BLVD
 COLUMBIA, SC
 US 29210
 Contact: GEORGE EDWARDS
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: