




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**4557M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

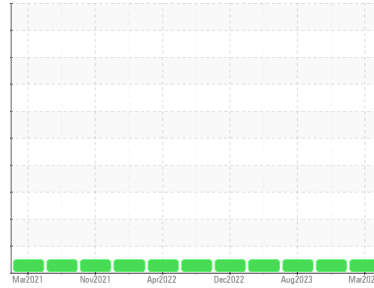

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0107800</b>	GFL0096568	GFL0091487
Sample Date	Client Info		<b>05 Mar 2024</b>	27 Nov 2023	16 Aug 2023
Machine Age	hrs	Client Info	<b>25597</b>	15069	24517
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>57</b>	21	28
Chromium	ppm	ASTM D5185m >20	<b>3</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	3	0
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>3</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	2	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	70	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1033</b>	996	913
Calcium	ppm	ASTM D5185m 1070	<b>1168</b>	1197	1129
Phosphorus	ppm	ASTM D5185m 1150	<b>966</b>	1105	1038
Zinc	ppm	ASTM D5185m 1270	<b>1296</b>	1340	1275
Sulfur	ppm	ASTM D5185m 2060	<b>2622</b>	3314	2996

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>13</b>	3	8
Sodium	ppm	ASTM D5185m	<b>7</b>	8	5
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>1.1</b>	0.5	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.1</b>	9.4	9.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.6</b>	19.9	19.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.9</b>	17.2	16.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.5</b>	7.7	7.4







# OIL ANALYSIS REPORT

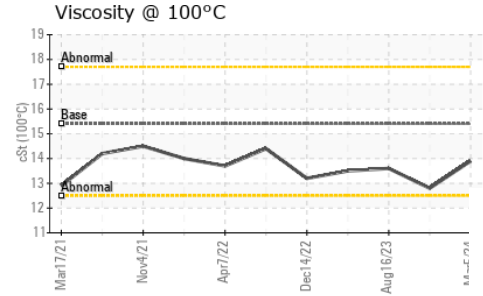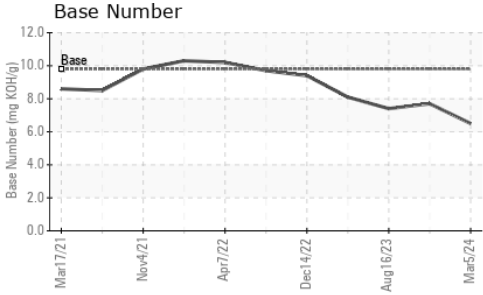

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	12.8	13.6

## GRAPHS

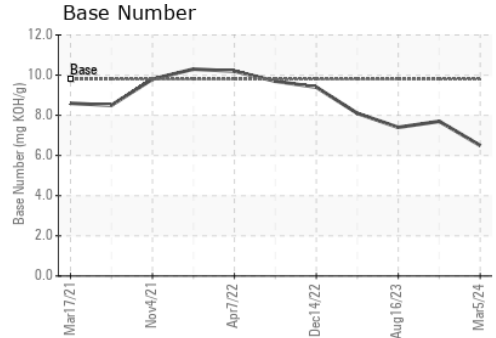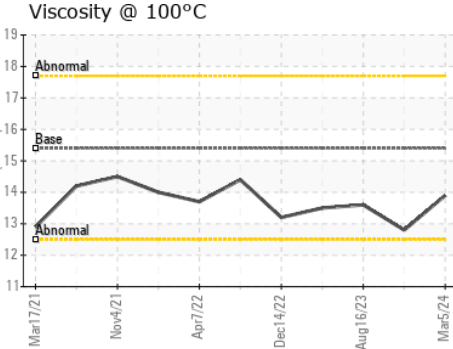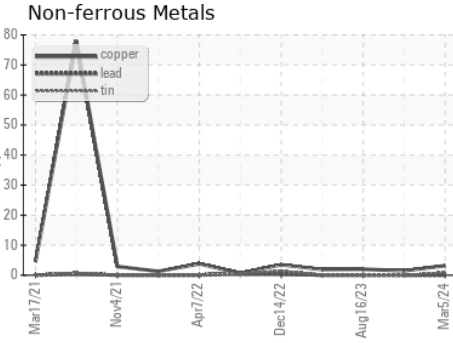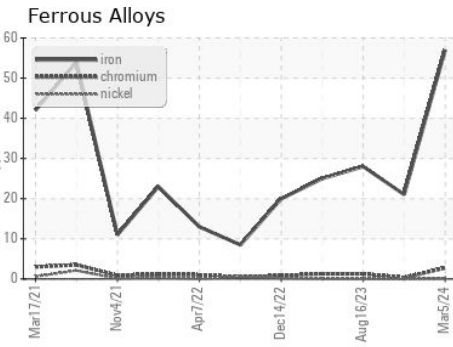

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107800      **Received** : 06 Mar 2024  
**Lab Number** : **06110827**      **Tested** : 07 Mar 2024  
**Unique Number** : 10914324      **Diagnosed** : 08 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340

Contact: Ricky Matthews  
 rickymathews@gflenv.com  
 T: (586)825-9514

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: