

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
002 - M-DELVAC 1300 10W30 - PCA0115868
 Component
New (Unused) Oil
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0115868	---	---
Sample Date	Client Info			05 Mar 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		0	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		<1	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		69	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		34	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		479	---	---
Calcium	ppm	ASTM D5185m		1526	---	---
Phosphorus	ppm	ASTM D5185m		724	---	---
Zinc	ppm	ASTM D5185m		839	---	---
Sulfur	ppm	ASTM D5185m		2224	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		9	---	---
Sodium	ppm	ASTM D5185m		1	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	646	---	---
Particles >6µm		ASTM D7647	>1300	174	---	---
Particles >14µm		ASTM D7647	>160	6	---	---
Particles >21µm		ASTM D7647	>40	1	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/10	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Base Number (BN)	mg KOH/g	ASTM D2896		9.97	---	---

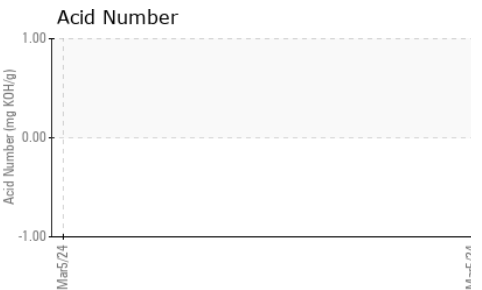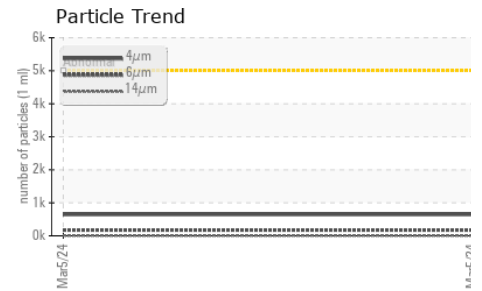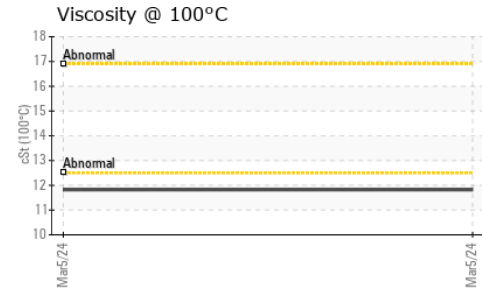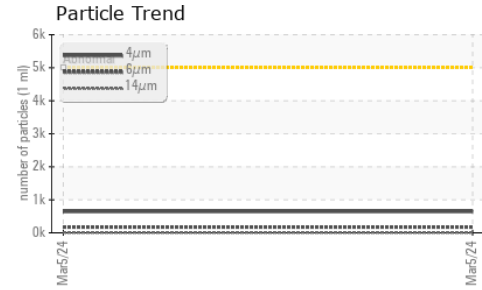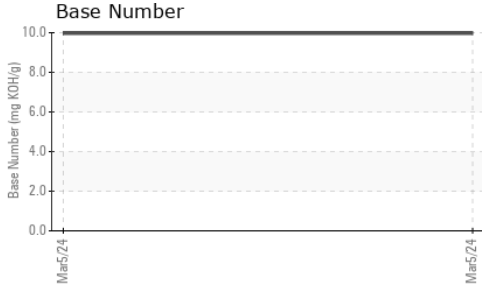

OIL ANALYSIS REPORT







VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	76.57	---	---
Visc @ 100°C	cSt	ASTM D445	11.82	---	---
Viscosity Index (VI)	Scale	ASTM D2270	148	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

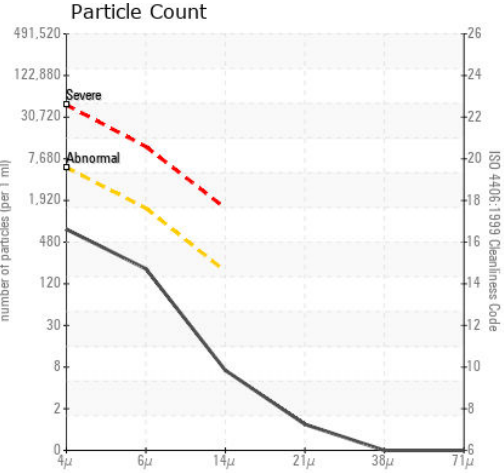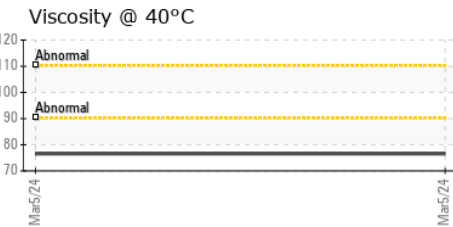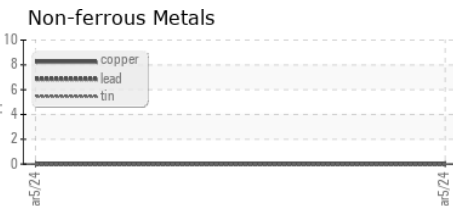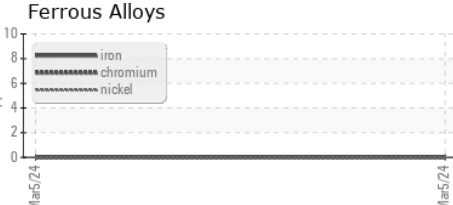

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0115868 **Received** : 06 Mar 2024
Lab Number : **06111002** **Tested** : 11 Mar 2024
Unique Number : 10914499 **Diagnosed** : 11 Mar 2024 - Doug Bogart
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TBN, VI)
 To discuss this sample report, contact Customer Service at 1-800-237-1369. **Contact: RIC ABERLE**
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **RICHARD.ABERLE@PARKLANDUSA.COM**
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **T: (701)663-5091**
F: (701)663-9445