




OIL ANALYSIS REPORT

Sample Rating Trend

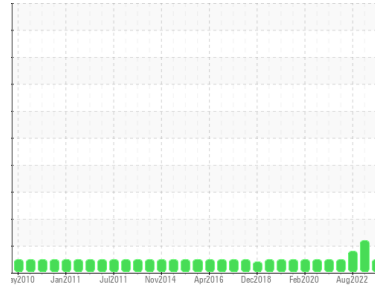

NORMAL



Area
(JN2K80)
Machine Id
STERLING 10098

Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (32 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0109047	GFL0086246	GFL0042679
Sample Date	Client Info		29 Feb 2024	15 Jun 2023	08 Aug 2022
Machine Age	hrs	Client Info	13296	80674	12363
Oil Age	hrs	Client Info	0	12932	0
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	15	26	28
Chromium	ppm	ASTM D5185m >20	<1	4	2
Nickel	ppm	ASTM D5185m >50	0	<1	0
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	<1	<1
Aluminum	ppm	ASTM D5185m >50	6	18	▲ 29
Lead	ppm	ASTM D5185m >40	0	1	<1
Copper	ppm	ASTM D5185m >330	<1	2	5
Tin	ppm	ASTM D5185m >15	0	<1	0
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	11	10	23
Barium	ppm	ASTM D5185m 10	0	4	0
Molybdenum	ppm	ASTM D5185m 100	53	57	58
Manganese	ppm	ASTM D5185m	0	1	<1
Magnesium	ppm	ASTM D5185m 450	701	820	737
Calcium	ppm	ASTM D5185m 3000	1072	1054	1052
Phosphorus	ppm	ASTM D5185m 1150	812	945	833
Zinc	ppm	ASTM D5185m 1350	1073	1143	1043
Sulfur	ppm	ASTM D5185m 4250	2899	3244	2640

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	5	6
Sodium	ppm	ASTM D5185m >216	2	2	22
Potassium	ppm	ASTM D5185m >20	12	3	13
Fuel	%	ASTM D3524 >5	<1.0	▲ 3.4	<1.0

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.6	1
Nitration	Abs/cm	*ASTM D7624 >20	6.7	7.2	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.6	18.1	21.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	12.1	12.6	15.6
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	7.7	8.1	9.6







OIL ANALYSIS REPORT

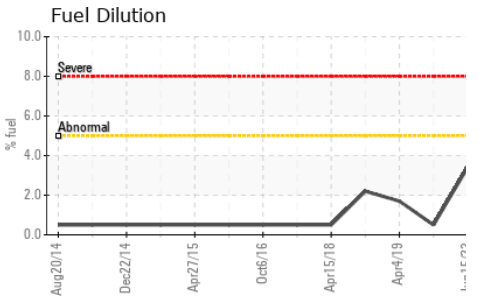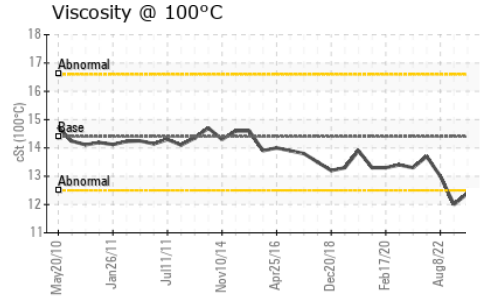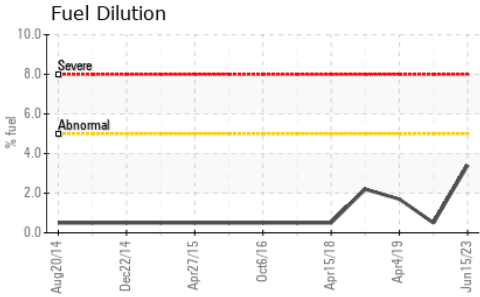

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.4	▲ 12.0	13.0

GRAPHS

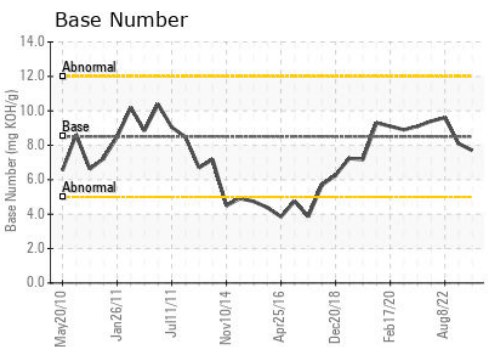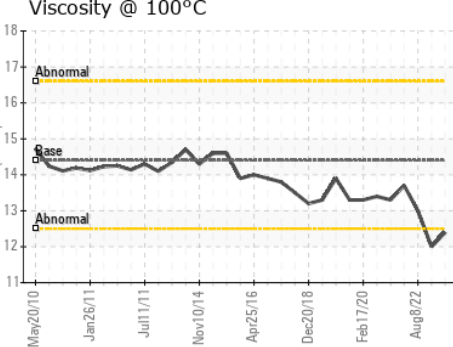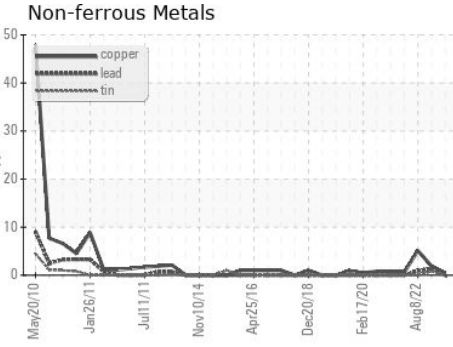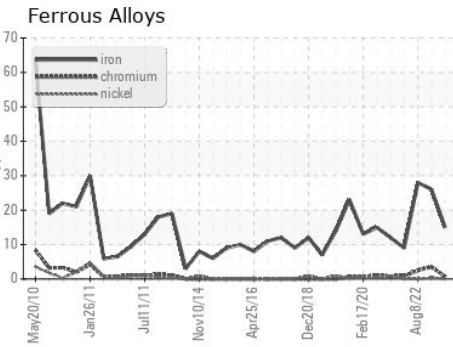

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109047 **Received** : 07 Mar 2024
Lab Number : 06111133 **Tested** : 07 Mar 2024
Unique Number : 10914630 **Diagnosed** : 07 Mar 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution)

GFL Environmental - 009 - Fairburn
 6905 Roosevelt Hwy
 Fairburn, GA
 US 30213
 Contact: Eric Jones
 erjones@gflenv.com
 T: (678)630-9927
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)