




# OIL ANALYSIS REPORT

Sample Rating Trend

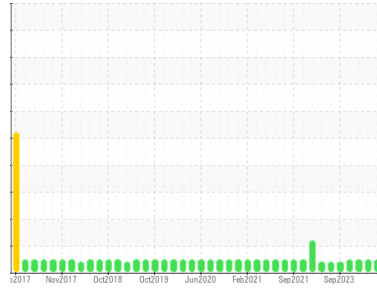

**NORMAL**



Area  
**(ECY338)**  
Machine Id  
**AUTOCAR 3742**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0109030</b>	GFL0109043	GFL0109071
Sample Date	Client Info	<b>29 Feb 2024</b>	22 Feb 2024	07 Feb 2024
Machine Age	hrs	<b>18630</b>	18589	18438
Oil Age	hrs	<b>2888</b>	18589	2696
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >165	<b>23</b>	26	18
Chromium	ppm ASTM D5185m >5	<b>1</b>	3	2
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	1	<1
Lead	ppm ASTM D5185m >150	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >90	<b>1</b>	2	<1
Tin	ppm ASTM D5185m >5	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>8</b>	13	16
Barium	ppm ASTM D5185m 0	<b>0</b>	1	0
Molybdenum	ppm ASTM D5185m 60	<b>54</b>	57	62
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>702</b>	686	779
Calcium	ppm ASTM D5185m 1070	<b>1122</b>	1020	1153
Phosphorus	ppm ASTM D5185m 1150	<b>636</b>	892	977
Zinc	ppm ASTM D5185m 1270	<b>1125</b>	1072	1139
Sulfur	ppm ASTM D5185m 2060	<b>2648</b>	3066	2942

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >35	<b>3</b>	6	4
Sodium	ppm ASTM D5185m	<b>4</b>	3	4
Potassium	ppm ASTM D5185m >20	<b>3</b>	2	0

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >7.5	<b>1</b>	0.9	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>7.8</b>	7.3	6.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.9</b>	18.9	18.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.3</b>	12.7	12.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.7</b>	7.7	7.9







# OIL ANALYSIS REPORT

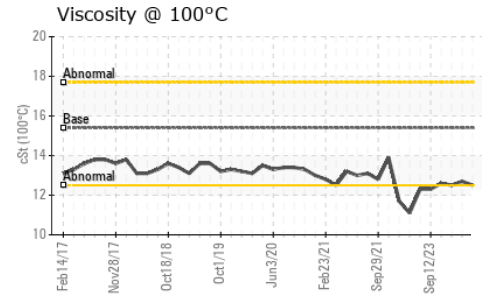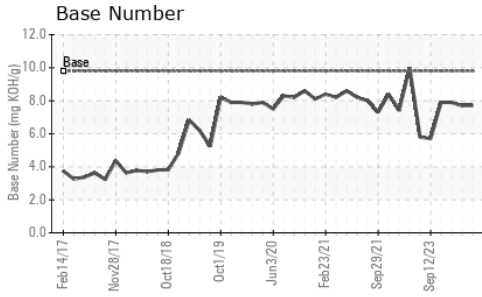

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.5	12.7	12.5

## GRAPHS

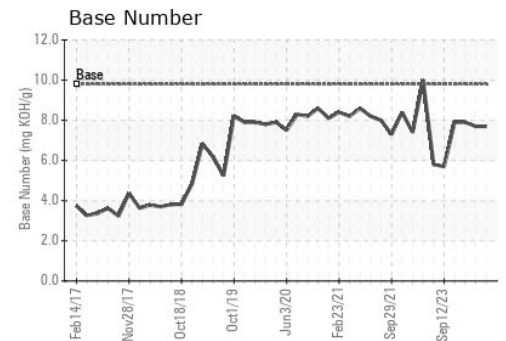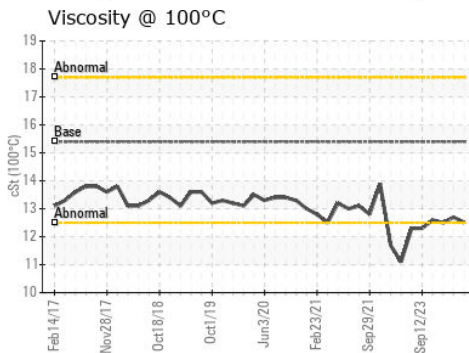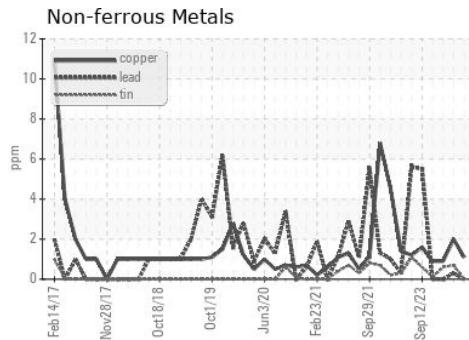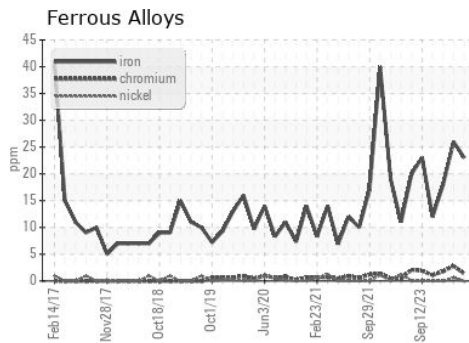

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0109030  
 Lab Number : **06111136**  
 Unique Number : 10914633  
 Test Package : FLEET

Received : 07 Mar 2024  
 Tested : 07 Mar 2024  
 Diagnosed : 07 Mar 2024 - Wes Davis

**GFL Environmental - 009 - Fairburn**  
 6905 Roosevelt Hwy  
 Fairburn, GA  
 US 30213  
 Contact: Eric Jones  
 erjones@gflenv.com  
 T: (678)630-9927  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)