




# OIL ANALYSIS REPORT

Sample Rating Trend

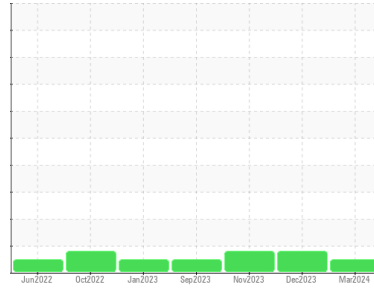

**NORMAL**



Machine Id  
**724047**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0097502</b>	GFL0097480	GFL0097476
Sample Date	Client Info		<b>01 Mar 2024</b>	11 Dec 2023	27 Nov 2023
Machine Age	hrs	Client Info	<b>18969</b>	18969	18969
Oil Age	hrs	Client Info	<b>17932</b>	17932	17932
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>93</b>	▲ 156	▲ 159
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	4	4
Lead	ppm	ASTM D5185m >40	<b>2</b>	3	2
Copper	ppm	ASTM D5185m >330	<b>2</b>	6	5
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	6	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	62	64
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>939</b>	904	985
Calcium	ppm	ASTM D5185m 1070	<b>1113</b>	1102	1179
Phosphorus	ppm	ASTM D5185m 1150	<b>1032</b>	962	960
Zinc	ppm	ASTM D5185m 1270	<b>1246</b>	1248	1285
Sulfur	ppm	ASTM D5185m 2060	<b>3079</b>	1943	2596

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	6	7
Sodium	ppm	ASTM D5185m	<b>30</b>	4	5
Potassium	ppm	ASTM D5185m >20	<b>4</b>	0	0
Fuel	%	ASTM D3524 >2.0	<b>0.4</b>	<1.0	<1.0

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	2.1	2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	9.3	9.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.4</b>	22.2	21.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	17.0	16.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	7.2	7.5







# OIL ANALYSIS REPORT

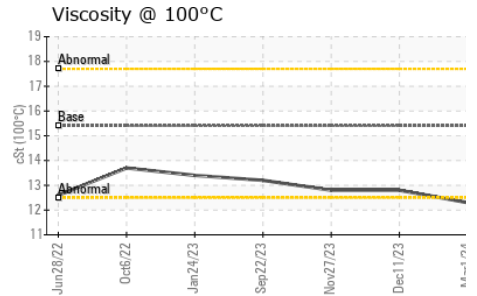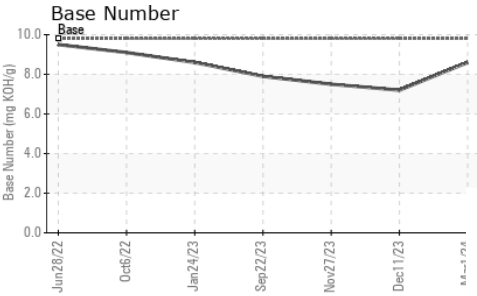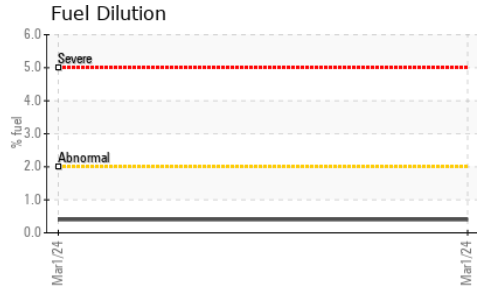

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.3	12.8

## GRAPHS

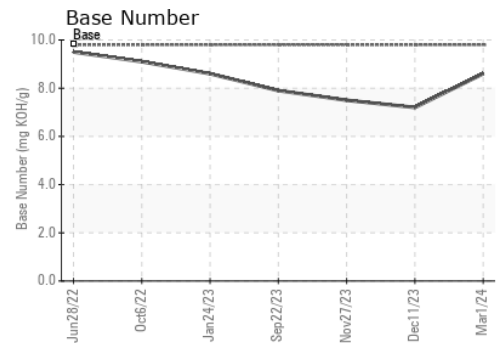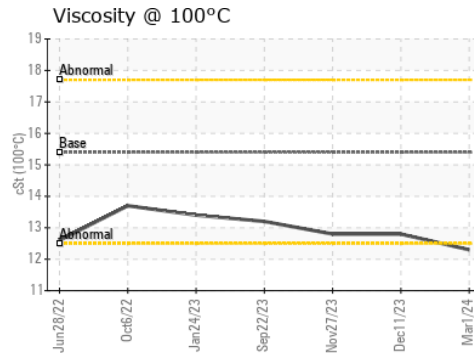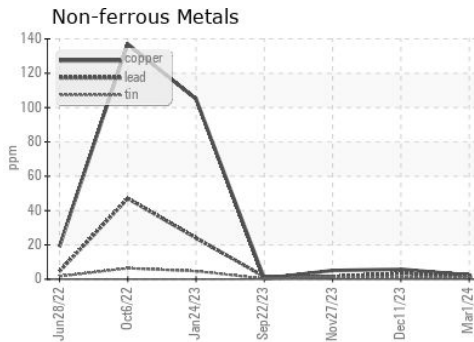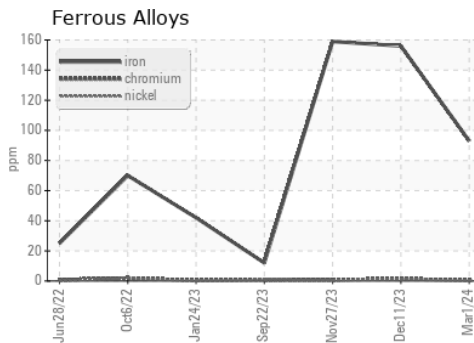

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0097502 Received : 07 Mar 2024  
 Lab Number : 06111143 Tested : 11 Mar 2024  
 Unique Number : 10914640 Diagnosed : 11 Mar 2024 - Wes Davis  
 Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 641 - Alpena**  
 1241 KING SETTLEMENT RD  
 ALPENA, MI  
 US 49707  
 Contact: DYLAN TOLAN  
 dylan.tolan@gflenv.com  
 T: (989)854-7203  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)