


# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**

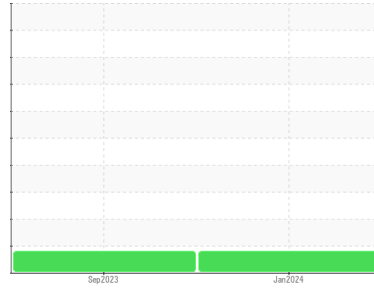

Machine Id  
**2126956**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

Valve wear is indicated. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116827</b>	PCA0081418	---
Sample Date	Client Info		<b>29 Jan 2024</b>	06 Sep 2023	---
Machine Age	mls	Client Info	<b>126825</b>	0	---
Oil Age	mls	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>33</b>	55	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m >4	<b>▲ 5</b>	▲ 9	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m >20	<b>7</b>	12	---
Lead	ppm	ASTM D5185m >40	<b>1</b>	2	---
Copper	ppm	ASTM D5185m >330	<b>55</b>	108	---
Tin	ppm	ASTM D5185m >15	<b>2</b>	3	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>2</b>	8	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	57	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m 950	<b>868</b>	839	---
Calcium	ppm	ASTM D5185m 1050	<b>1147</b>	1319	---
Phosphorus	ppm	ASTM D5185m 995	<b>910</b>	849	---
Zinc	ppm	ASTM D5185m 1180	<b>1204</b>	1152	---
Sulfur	ppm	ASTM D5185m 2600	<b>2836</b>	2734	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	9	---
Sodium	ppm	ASTM D5185m	<b>2</b>	4	---
Potassium	ppm	ASTM D5185m >20	<b>19</b>	38	---

## INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.7	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	10.9	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	23.3	---

## FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.8</b>	20.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.3</b>	5.6	---

# OIL ANALYSIS REPORT


**▲ Ferrous Alloys**

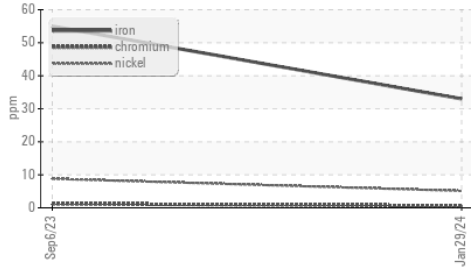

**Base Number**

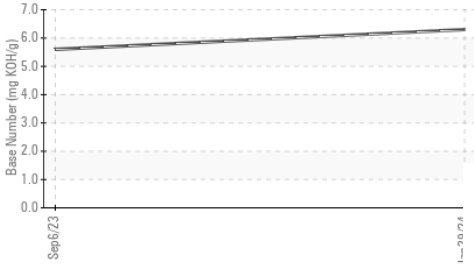

**Viscosity @ 100°C**

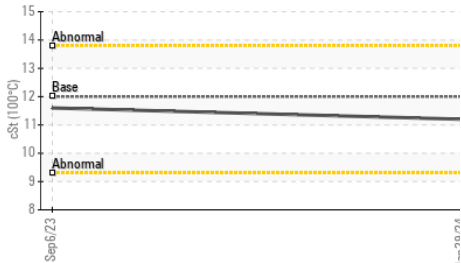


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.6

**GRAPHS**


**▲ Ferrous Alloys**

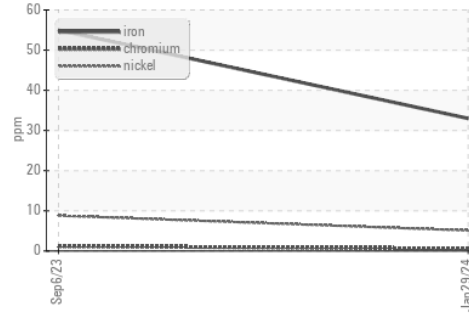


**Non-ferrous Metals**

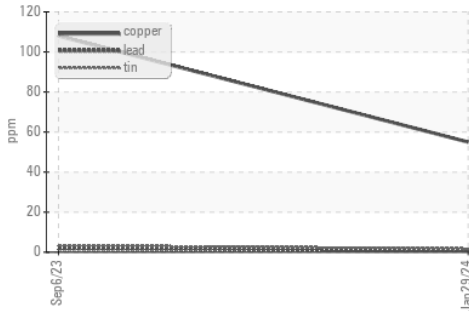

**Viscosity @ 100°C**

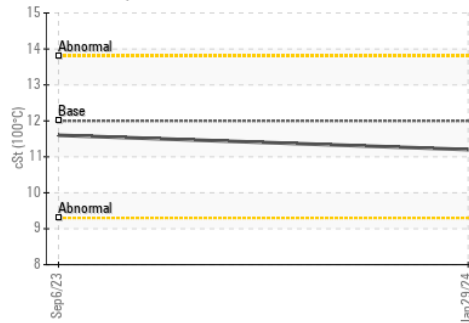

**Base Number**

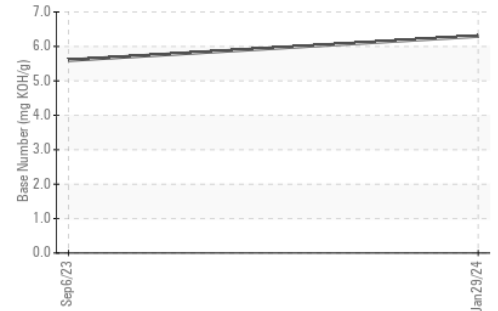

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116827  
**Lab Number** : 06111187  
**Unique Number** : 10914684  
**Test Package** : FLEET

**PERDUE FARMS - PRINCE GEORGE**  
 6012 HARDWARE DR  
 PRINCE GEORGE, VA  
 US 23875  
 Contact: MICHAEL DAVIS  
 MICHAELP.DAVIS@PERDUE.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: