




# OIL ANALYSIS REPORT

Sample Rating Trend

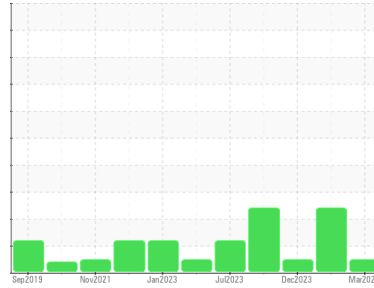

**NORMAL**



Area  
**(V16586)**  
Machine Id  
**924024-260242**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0104987</b>	GFL0104997	GFL0105000
Sample Date	Client Info		<b>05 Mar 2024</b>	09 Jan 2024	21 Dec 2023
Machine Age	hrs	Client Info	<b>4242</b>	4087	4064
Oil Age	hrs	Client Info	<b>0</b>	650	100
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>11</b>	9	4
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>4</b>	2	1
Lead	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >100	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	66	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>958</b>	942	900
Calcium	ppm	ASTM D5185m 1070	<b>1070</b>	1006	1016
Phosphorus	ppm	ASTM D5185m 1150	<b>941</b>	962	1055
Zinc	ppm	ASTM D5185m 1270	<b>1169</b>	1249	1194
Sulfur	ppm	ASTM D5185m 2060	<b>2789</b>	2982	2938

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>11</b>	7	3
Sodium	ppm	ASTM D5185m	<b>4</b>	▲ 103	37
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	▲ 70	9

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	6.6	5.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.3</b>	18.0	17.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.5</b>	13.8	12.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.4</b>	7.4	9.3







# OIL ANALYSIS REPORT

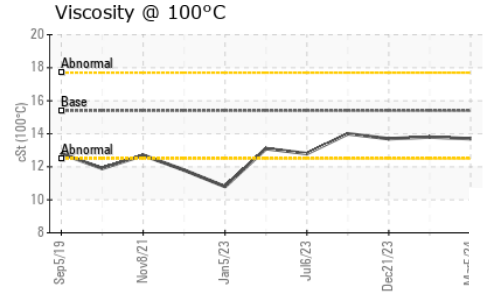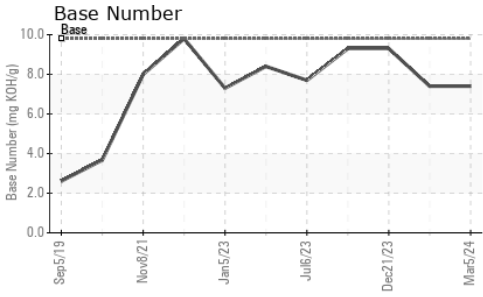

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.8	13.7

## GRAPHS

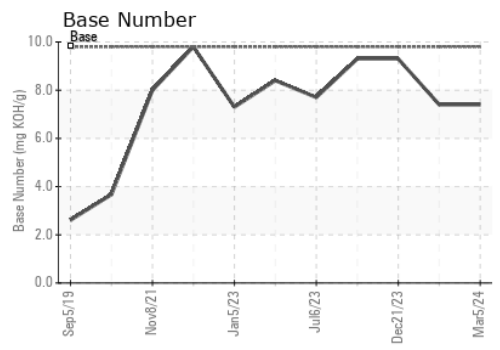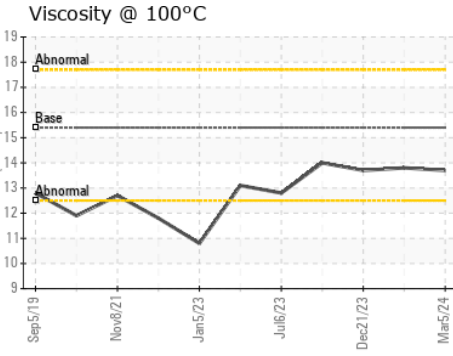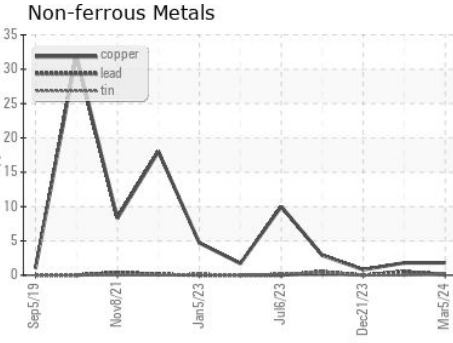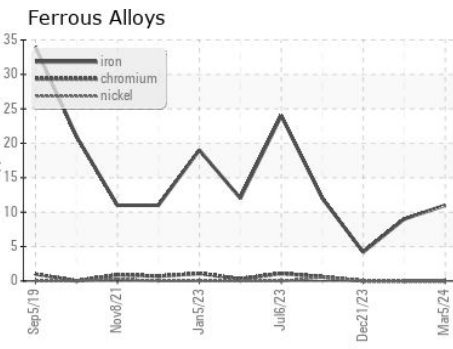

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104987 **Received** : 07 Mar 2024  
**Lab Number** : **06111237** **Tested** : 08 Mar 2024  
**Unique Number** : 10914734 **Diagnosed** : 08 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 892 - Pauls Valley Hauling**  
 405 East Airport Industrial Road  
 Pauls Valley, OK  
 US 73075  
 Contact: Tony Graham  
 tgraham2@wcamerica.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)