



PROBLEM SUMMARY

Sample Rating Trend


FUEL





Machine Id
229011-1226

Component
Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

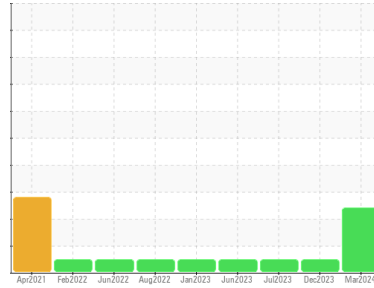

COMPONENT CONDITION SUMMARY

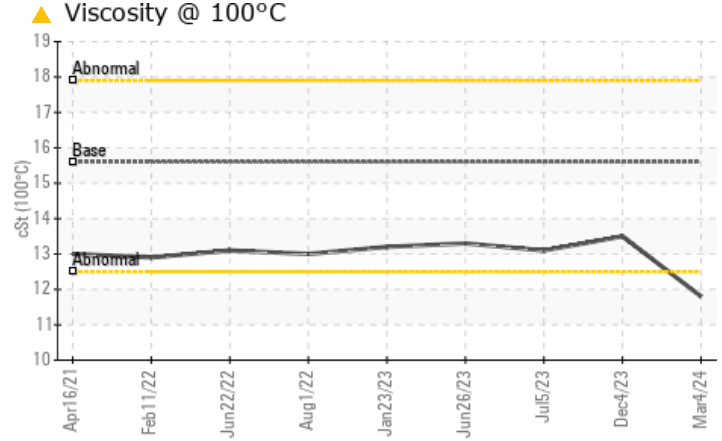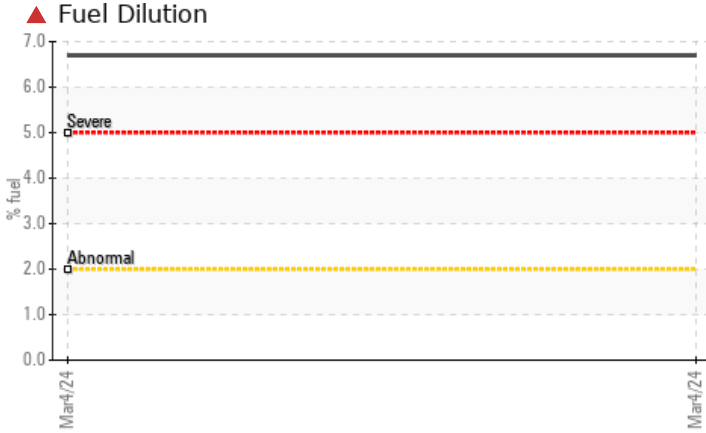

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. (Customer Sample Comment: Sample)

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Fuel	%	ASTM D3524	>2.0	▲ 6.7	<1.0	<1.0
Visc @ 100°C	cSt	ASTM D445	15.6	▲ 11.8	13.5	13.1

Customer Id: GFL626
 Sample No.: GFL0115455
 Lab Number: 06111257
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

04 Dec 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



05 Jul 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



26 Jun 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report





OIL ANALYSIS REPORT

Sample Rating Trend


FUEL



Machine Id
229011-1226

Component
Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

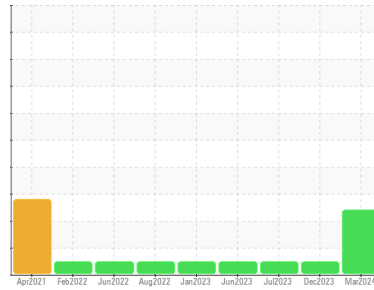

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. (Customer Sample Comment: Sample)

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0115455	GFL0100051	GFL0062203
Sample Date	Client Info	04 Mar 2024	04 Dec 2023	05 Jul 2023
Machine Age	hrs	4502	4306	4072
Oil Age	hrs	4072	239	494
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		SEVERE	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	13	19	35
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >4	0	0	<1
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	<1
Aluminum	ppm ASTM D5185m >20	10	11	14
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	<1	<1	3
Tin	ppm ASTM D5185m >15	0	0	<1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	7	11	30
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	66	58	50
Manganese	ppm ASTM D5185m	<1	0	<1
Magnesium	ppm ASTM D5185m	885	889	661
Calcium	ppm ASTM D5185m	1084	1132	1367
Phosphorus	ppm ASTM D5185m	957	996	949
Zinc	ppm ASTM D5185m	1146	1254	1160
Sulfur	ppm ASTM D5185m	2970	3105	2972

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	5	4
Sodium	ppm ASTM D5185m	1	3	0
Potassium	ppm ASTM D5185m >20	4	13	20
Fuel	% ASTM D3524 >2.0	▲ 6.7	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.2	0.4	0.7
Nitration	Abs/cm *ASTM D7624 >20	7.4	8.0	10.9
Sulfation	Abs/.1mm *ASTM D7415 >30	18.1	18.9	21.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.5	15.1	18.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.9	8.6	7.6







OIL ANALYSIS REPORT

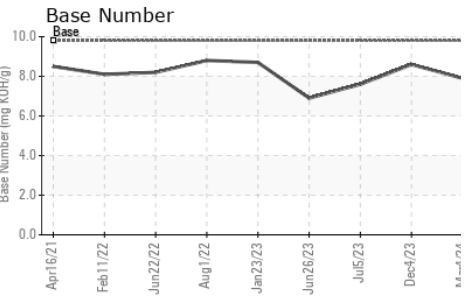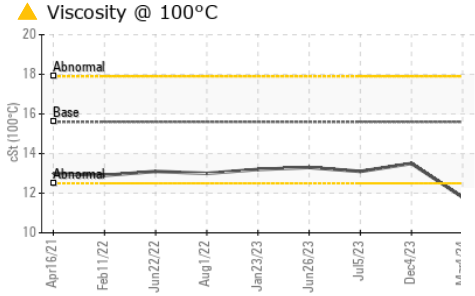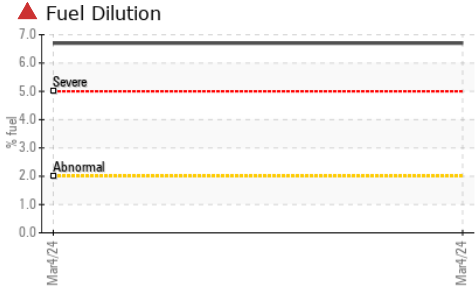

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6 ▲ 11.8	13.5	13.1

GRAPHS

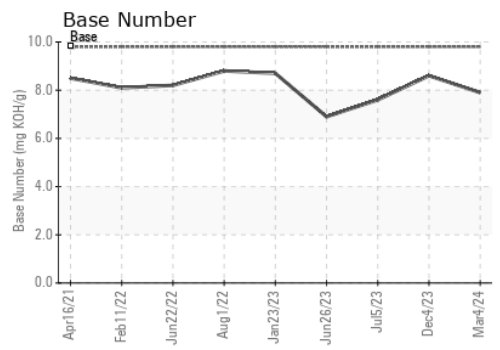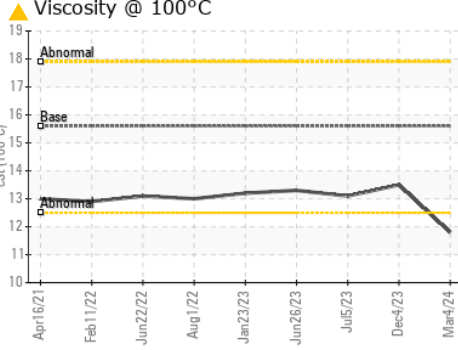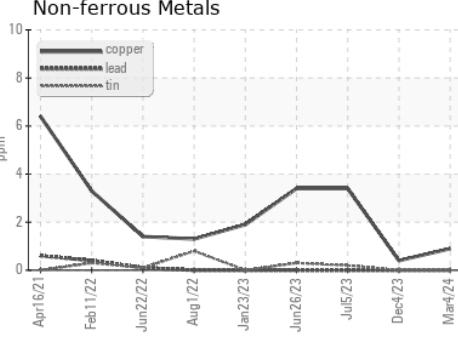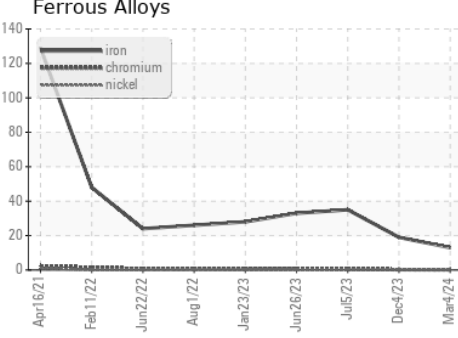

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115455 **Received** : 07 Mar 2024
Lab Number : 06111257 **Tested** : 11 Mar 2024
Unique Number : 10914754 **Diagnosed** : 11 Mar 2024 - Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 626 - Cadillac Hauling
 1501 Ron Wilson St
 Cadillac, MI
 US 49601
 Contact: GARY BREWER
 gbrewerjr@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)