




OIL ANALYSIS REPORT

Sample Rating Trend

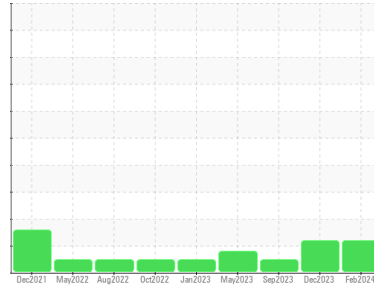

WEAR



Machine Id
724010-515

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: Sample)

Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0115447	GFL0100048	GFL0062247	
Sample Date	Client Info	29 Feb 2024	04 Dec 2023	12 Sep 2023	
Machine Age	hrs	Client Info	36945	36945	36888
Oil Age	hrs	Client Info	36484	1	404
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd	
Sample Status		ABNORMAL	ABNORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2	
Fuel	WC Method	>2.0	<1.0	0.2	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	▲ 137	▲ 118	96
Chromium	ppm	ASTM D5185m	>20	2	2	2
Nickel	ppm	ASTM D5185m	>4	2	1	3
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	3	5
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	2	2	2
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	11	11	12
Barium	ppm	ASTM D5185m	0	0	3	0
Molybdenum	ppm	ASTM D5185m	60	70	71	71
Manganese	ppm	ASTM D5185m	0	1	0	<1
Magnesium	ppm	ASTM D5185m	1010	883	823	916
Calcium	ppm	ASTM D5185m	1070	1151	1070	1195
Phosphorus	ppm	ASTM D5185m	1150	939	941	1041
Zinc	ppm	ASTM D5185m	1270	1122	1117	1264
Sulfur	ppm	ASTM D5185m	2060	2738	3027	3103

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	6	6	5
Sodium	ppm	ASTM D5185m		2	0	<1
Potassium	ppm	ASTM D5185m	>20	0	2	<1

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.9	0.9	0.8
Nitration	Abs/cm	*ASTM D7624	>20	7.2	7.2	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	19.2	19.1


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	14.5	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.0	8.1	8.4




OIL ANALYSIS REPORT


▲ Ferrous Alloys

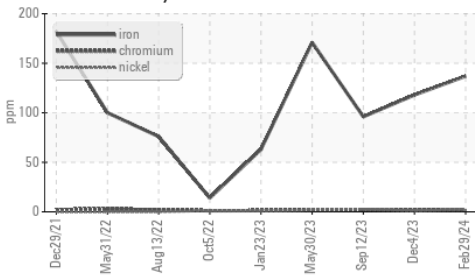

● Viscosity @ 100°C

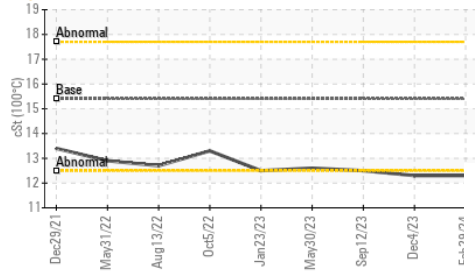

Base Number

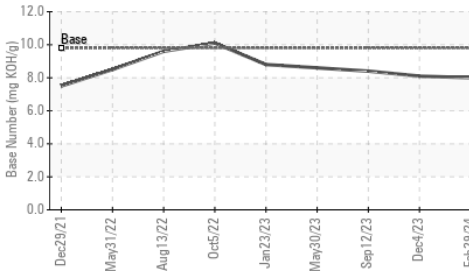


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.3	12.5

GRAPHS


▲ Ferrous Alloys

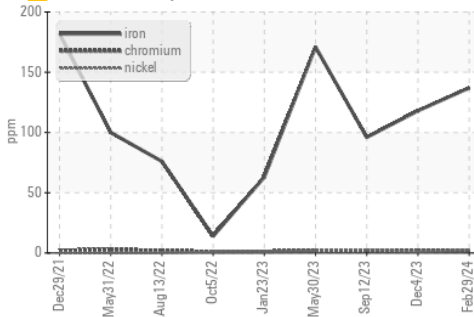


Non-ferrous Metals

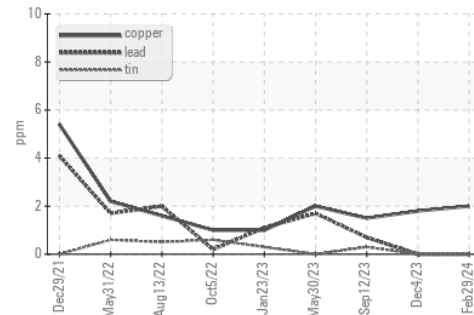

● Viscosity @ 100°C

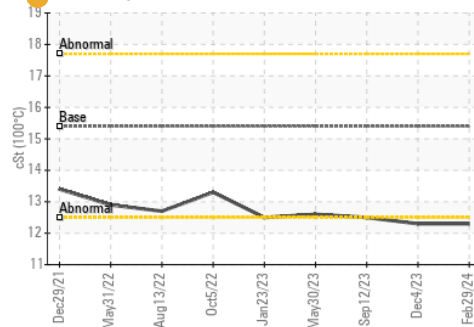

Base Number

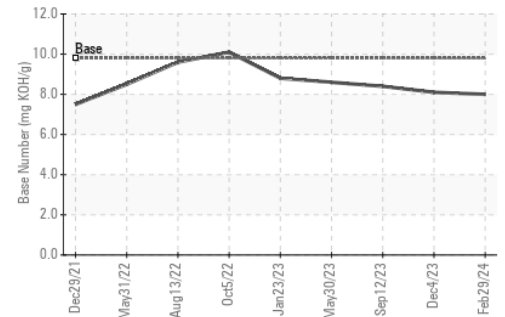

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0115447

Lab Number : 06111259

Unique Number : 10914756

Test Package : FLEET

Received : 07 Mar 2024

Tested : 08 Mar 2024

Diagnosed : 09 Mar 2024 - Don Baldrige

GFL Environmental - 626 - Cadillac Hauling

1501 Ron Wilson St

Cadillac, MI

US 49601

Contact: GARY BREWER

gbrewerjr@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)