




OIL ANALYSIS REPORT

Sample Rating Trend

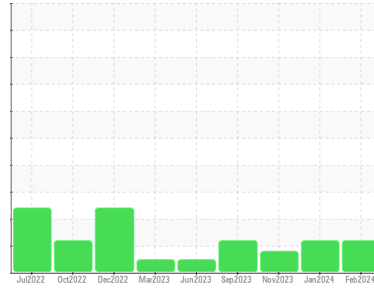

FUEL



Machine Id
722033

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0097505	GFL0097481	GFL0097472
Sample Date	Client Info	22 Feb 2024	03 Jan 2024	27 Nov 2023
Machine Age	hrs	16594	16235	15957
Oil Age	hrs	13691	13691	13691
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	25	30	13
Chromium	ppm	ASTM D5185m	>20	2	2	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	<1	2
Lead	ppm	ASTM D5185m	>40	1	2	0
Copper	ppm	ASTM D5185m	>330	2	8	<1
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	6	7	5
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	69	67	57
Manganese	ppm	ASTM D5185m	0	<1	0	0
Magnesium	ppm	ASTM D5185m	1010	1038	1092	916
Calcium	ppm	ASTM D5185m	1070	1261	1340	1080
Phosphorus	ppm	ASTM D5185m	1150	1098	1129	949
Zinc	ppm	ASTM D5185m	1270	1300	1500	1232
Sulfur	ppm	ASTM D5185m	2060	3041	3019	2864

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	3	6	3
Sodium	ppm	ASTM D5185m		7	6	5
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Fuel	%	ASTM D3524	>2.0	▲ 4.1	▲ 4.2	▲ 2.9

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.4
Nitration	Abs/cm	*ASTM D7624	>20	10.6	10.0	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	21.3	19.2


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	16.3	16.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.7	7.7	8.1




OIL ANALYSIS REPORT


Fuel Dilution

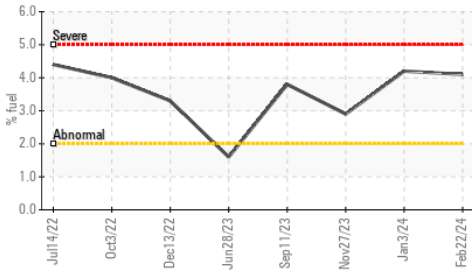

Viscosity @ 100°C

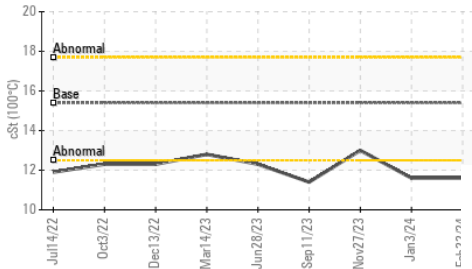

Base Number

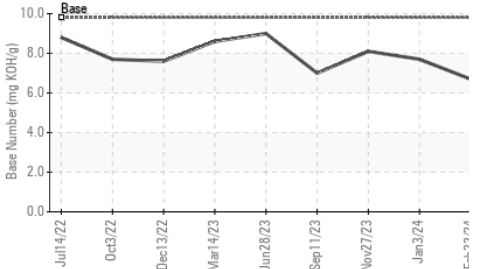


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.6	▲ 11.6

GRAPHS


Ferrous Alloys

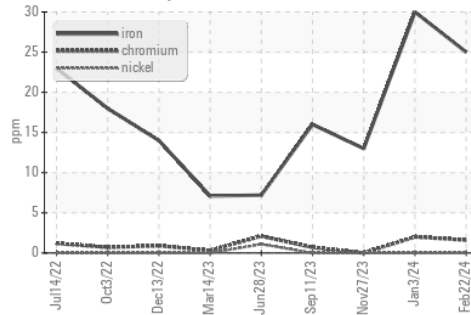


Non-ferrous Metals

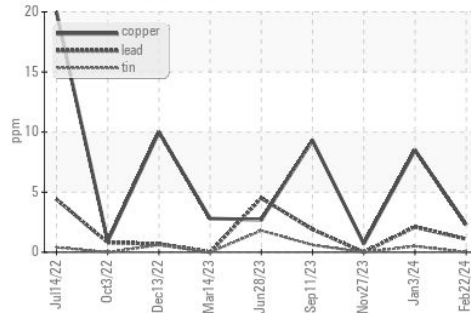

Viscosity @ 100°C

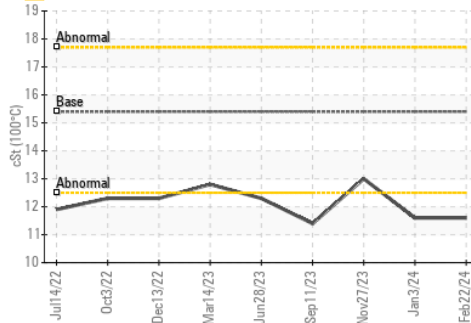

Base Number

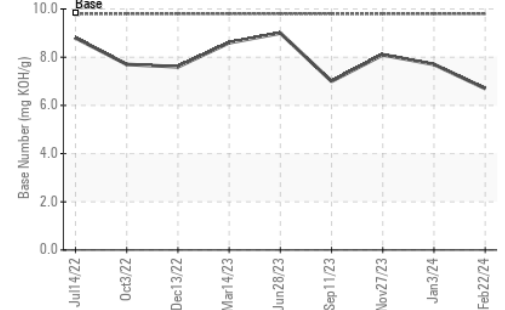

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0097505 Received : 07 Mar 2024
 Lab Number : 06111268 Tested : 11 Mar 2024
 Unique Number : 10914765 Diagnosed : 11 Mar 2024 - Wes Davis
 Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 641 - Alpena
 1241 KING SETTLEMENT RD
 ALPENA, MI
 US 49707
 Contact: DYLAN TOLAN
 dylan.tolan@gflenv.com
 T: (989)854-7203
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)