




PROBLEM SUMMARY

Sample Rating Trend

GLYCOL




Machine Id
577M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (5 GAL)

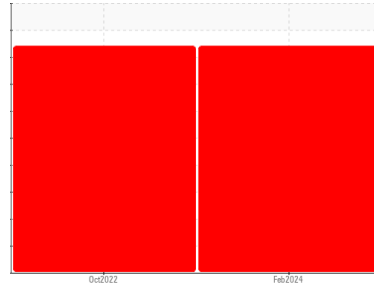

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

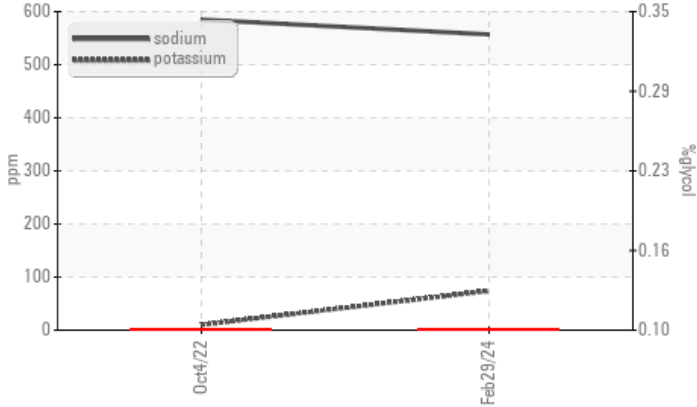

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	---
Sodium	ppm	ASTM D5185m		▲ 557	▲ 585	---
Potassium	ppm	ASTM D5185m	>20	▲ 74	▲ 10	---
Glycol	%	*ASTM D2982		▲ 0.10	▲ 0.10	---

Customer Id: GFL405
Sample No.: GFL0115016
Lab Number: 06111273
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	DONE	Mar 14 2024	?	We recommend an early resample to monitor this condition.
Check Glycol Access	SKIPPED	Mar 14 2024	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

04 Oct 2022 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report





OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL



Machine Id
577M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (5 GAL)



DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0115016	GFL0052064	---
Sample Date	Client Info		29 Feb 2024	04 Oct 2022	---
Machine Age	hrs	Client Info	4929	4084	---
Oil Age	hrs	Client Info	741	4084	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			SEVERE	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	31	57	---
Chromium	ppm	ASTM D5185m >20	1	3	---
Nickel	ppm	ASTM D5185m >2	<1	0	---
Titanium	ppm	ASTM D5185m >2	0	<1	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >20	3	5	---
Lead	ppm	ASTM D5185m >40	0	<1	---
Copper	ppm	ASTM D5185m >330	<1	2	---
Tin	ppm	ASTM D5185m >15	0	<1	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	69	11	---
Barium	ppm	ASTM D5185m 0	0	<1	---
Molybdenum	ppm	ASTM D5185m 60	72	77	---
Manganese	ppm	ASTM D5185m 0	<1	<1	---
Magnesium	ppm	ASTM D5185m 1010	595	882	---
Calcium	ppm	ASTM D5185m 1070	1534	1079	---
Phosphorus	ppm	ASTM D5185m 1150	789	996	---
Zinc	ppm	ASTM D5185m 1270	951	1235	---
Sulfur	ppm	ASTM D5185m 2060	2705	3075	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	16	13	---
Sodium	ppm	ASTM D5185m	▲ 557	▲ 585	---
Potassium	ppm	ASTM D5185m >20	▲ 74	▲ 10	---
Glycol	%	*ASTM D2982	▲ 0.10	▲ 0.10	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	1.5	1.6	---
Nitration	Abs/cm	*ASTM D7624 >20	7.9	16.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.6	29.9	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.7	26.4	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	10.8	7.0	---




OIL ANALYSIS REPORT


Glycol Contamination

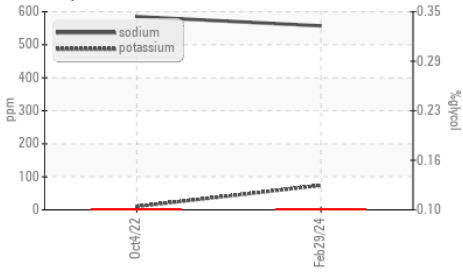

Base Number

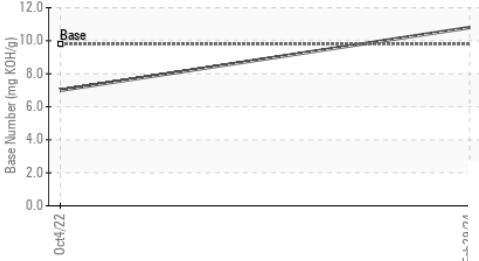

Viscosity @ 100°C

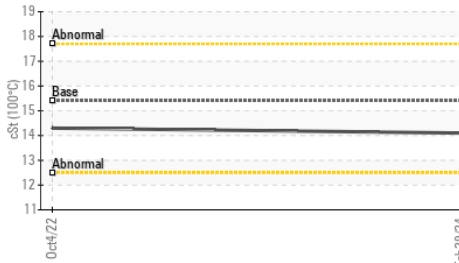


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.3

GRAPHS


Ferrous Alloys

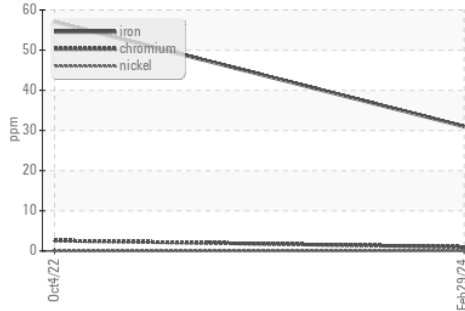


Non-ferrous Metals

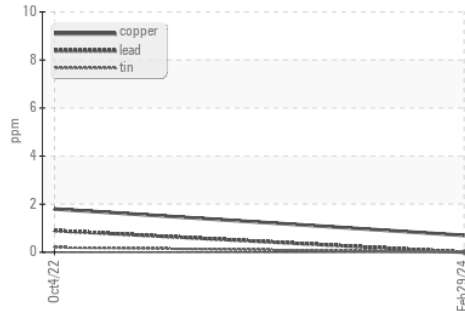

Viscosity @ 100°C

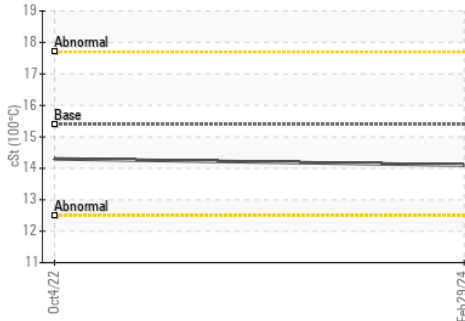

Base Number

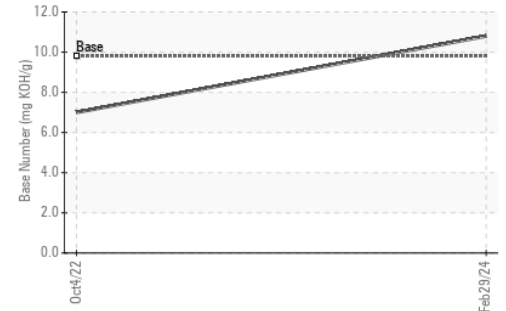

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0115016

Lab Number : 06111273

Unique Number : 10914770

Test Package : FLEET

Received : 07 Mar 2024

Tested : 11 Mar 2024

Diagnosed : 11 Mar 2024 - Jonathan Hester

GFL Environmental - 405 - Arbor Hills

7400 Napier Rd

NORTHVILLE, MI

US 48168

Contact: Anthony Hopkins

ahopkins@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)