




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

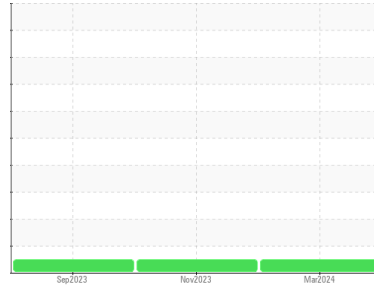

Area  
**(BD56833)**  
 Machine Id  
**213039**

Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0029664</b>	GFL0092959	GFL0092941
Sample Date	Client Info		<b>01 Mar 2024</b>	27 Nov 2023	12 Sep 2023
Machine Age	mls	Client Info	<b>6021</b>	3387	942
Oil Age	mls	Client Info	<b>3387</b>	942	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	1.4
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>18</b>	5	39
Chromium	ppm	ASTM D5185m >20	<b>2</b>	0	3
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	2
Silver	ppm	ASTM D5185m >2	<b>2</b>	0	1
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	1	7
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	2
Copper	ppm	ASTM D5185m >330	<b>4</b>	1	12
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>10</b>	9	87
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	47
Molybdenum	ppm	ASTM D5185m 100	<b>54</b>	53	8
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	3
Magnesium	ppm	ASTM D5185m 450	<b>900</b>	970	693
Calcium	ppm	ASTM D5185m 3000	<b>1073</b>	1082	1151
Phosphorus	ppm	ASTM D5185m 1150	<b>977</b>	1066	944
Zinc	ppm	ASTM D5185m 1350	<b>1149</b>	1265	1120
Sulfur	ppm	ASTM D5185m 4250	<b>3070</b>	3250	3906

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	6	25
Sodium	ppm	ASTM D5185m >216	<b>3</b>	2	8
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	8

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.4</b>	4.7	6.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.1</b>	17.3	18.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	12.7	12.4
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.6</b>	9.3	9.4











# OIL ANALYSIS REPORT

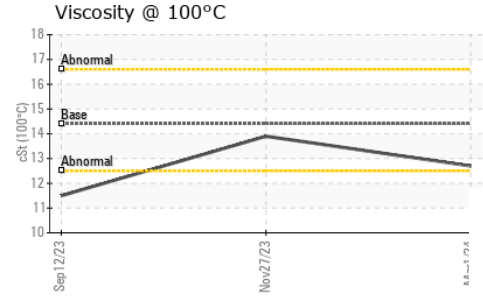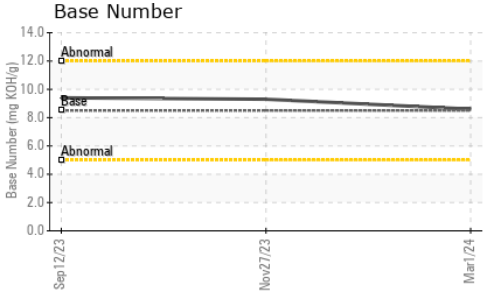

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.7	13.9

## GRAPHS

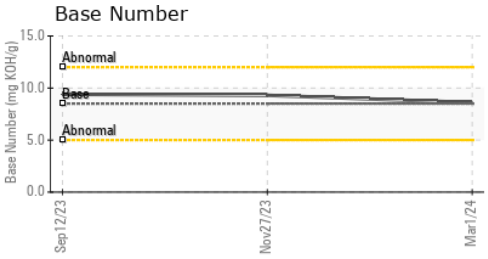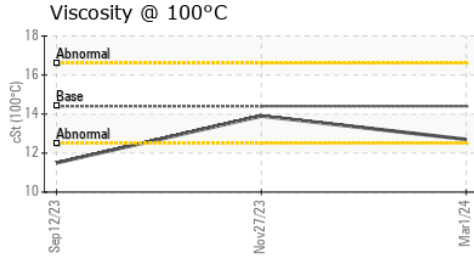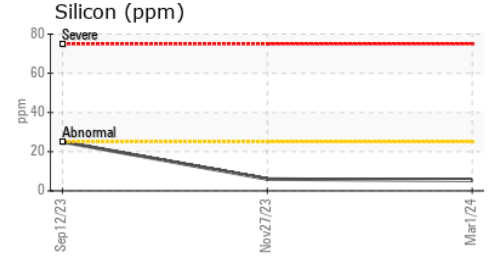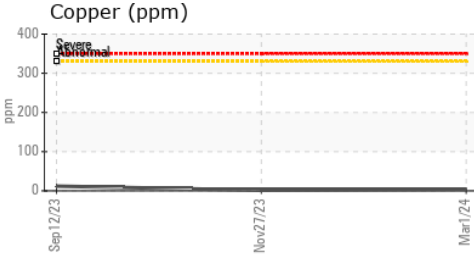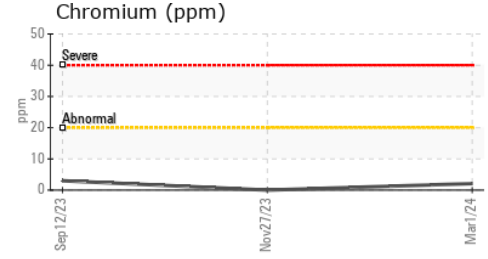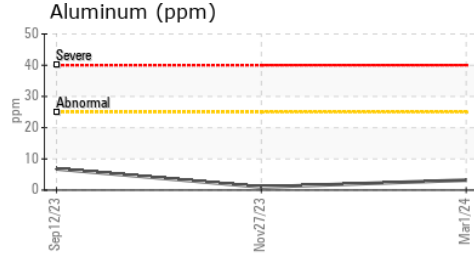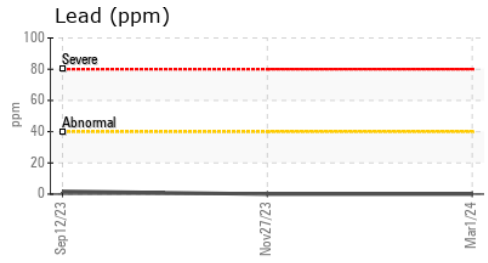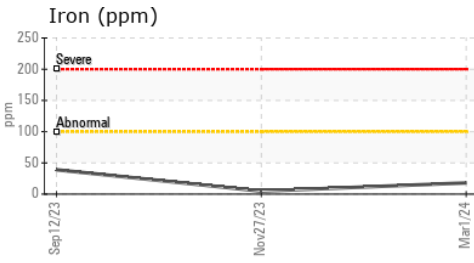

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0029664  
**Lab Number** : 06111277  
**Unique Number** : 10914774  
**Test Package** : MOB1+

**Received** : 07 Mar 2024  
**Tested** : 08 Mar 2024  
**Diagnosed** : 08 Mar 2024 - Wes Davis

**GFL Environmental - 463 - Cheboygan**  
 501 N. Western Ave  
 Cheboygan, MI  
 US 49721  
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: