


## **OIL ANALYSIS REPORT**

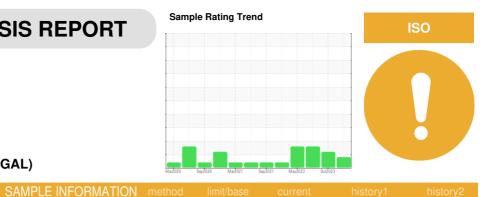

## RC-4 (S/N R60182) Component

**Reciprocating Compressor** 

**CHEVRON REFRIGERATION OIL WF 68 (--- GAL)** 

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		methou	iiiiiii/base	Current	Thistory I	mstoryz
Sample Number		Client Info		PCA0115276	PCA0106627	PCA0101702
Sample Date		Client Info		23 Feb 2024	09 Oct 2023	26 Jul 2023
Machine Age	hrs	Client Info		37768	37768	37767
Oil Age	hrs	Client Info		1	1	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		0	2	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	<1	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		108	118	88
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		0	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.1	0.001	0.002	0.001
ppm Water	ppm	ASTM D6304	>1000	11	15.7	7.0
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	<mark>)</mark> 2837	▲ 10625	12589
Particles >6µm		ASTM D7647	>320	241	<u> </u>	▲ 2332
Particles >14µm		ASTM D7647	>40	6	38	<b>6</b> 5
Particles >21µm		ASTM D7647	>10	0	9	10
Particles >38µm		ASTM D7647	>3	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/15/12	<b>e</b> 19/15/10	▲ 21/17/12	<b>1</b> 21/18/13
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.013	0.014	0.014


Contact/Location: Cindy Scofield - KRAWAL



# **OIL ANALYSIS REPORT**

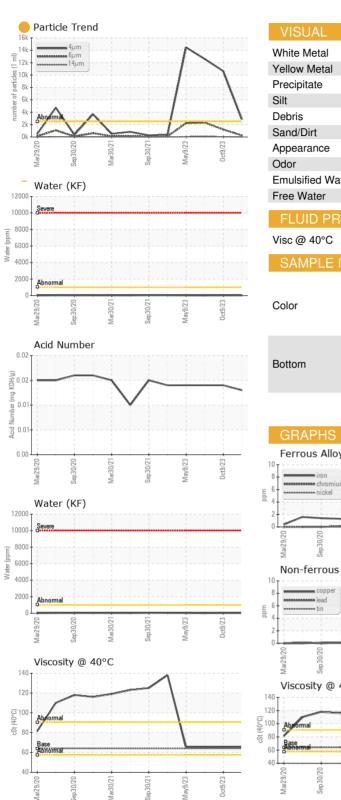



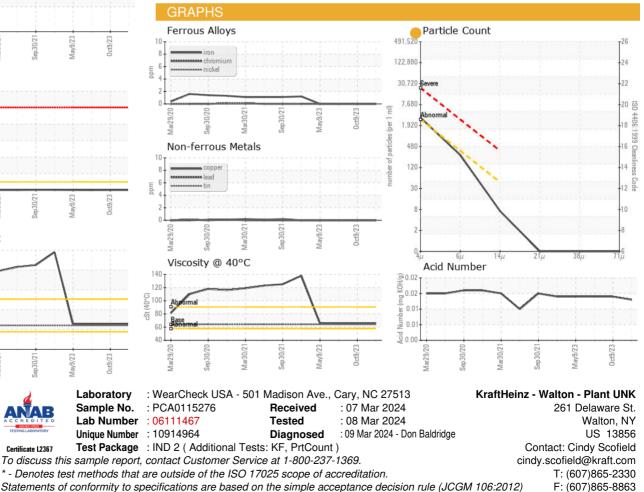

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

回給

Contact/Location: Cindy Scofield - KRAWAL