


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

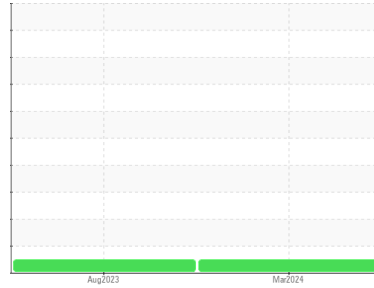

Machine Id
2126965
 Component
Transmission (Manual)
 Fluid
{not provided} (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0115465	PCA0102509	---
Sample Date	Client Info			06 Mar 2024	20 Aug 2023	---
Machine Age	mls Client Info			100821	0	---
Oil Age	mls Client Info			0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	47	60	---
Chromium	ppm	ASTM D5185m	>5	<1	1	---
Nickel	ppm	ASTM D5185m	>5	<1	2	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>7	0	0	---
Aluminum	ppm	ASTM D5185m	>25	2	2	---
Lead	ppm	ASTM D5185m	>45	0	<1	---
Copper	ppm	ASTM D5185m	>225	46	57	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		2	<1	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	2	---
Manganese	ppm	ASTM D5185m		24	41	---
Magnesium	ppm	ASTM D5185m		2	4	---
Calcium	ppm	ASTM D5185m		857	1225	---
Phosphorus	ppm	ASTM D5185m		639	951	---
Zinc	ppm	ASTM D5185m		<1	10	---
Sulfur	ppm	ASTM D5185m		4455	6766	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	60	86	---
Sodium	ppm	ASTM D5185m		3	<1	---
Potassium	ppm	ASTM D5185m	>20	0	2	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

OIL ANALYSIS REPORT

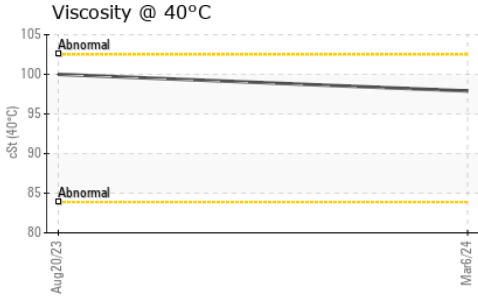




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	97.9	100	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

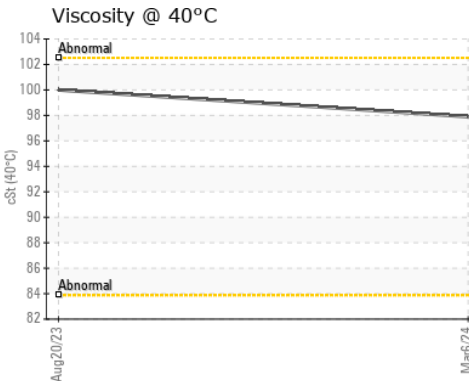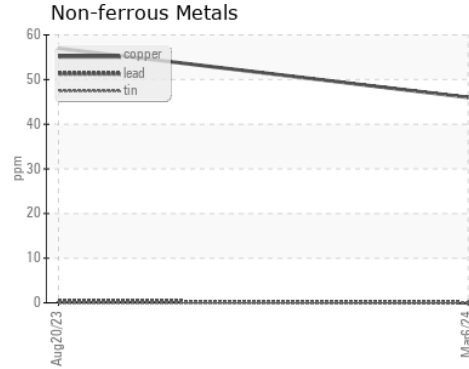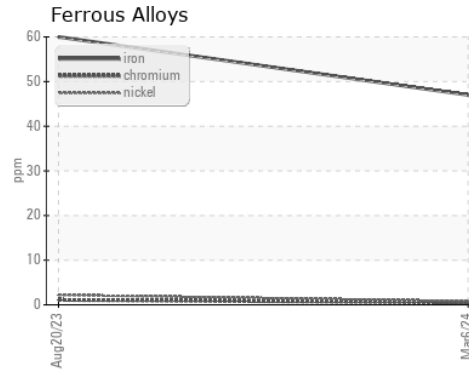

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0115465
Lab Number : 06111784
Unique Number : 10915281
Test Package : FLEET

Received : 07 Mar 2024
Tested : 08 Mar 2024
Diagnosed : 08 Mar 2024 - Wes Davis

PERDUE FARMS - PRINCE GEORGE
 6012 HARDWARE DR
 PRINCE GEORGE, VA
 US 23875
 Contact: MICHAEL DAVIS
 MICHAELP.DAVIS@PERDUE.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: