


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

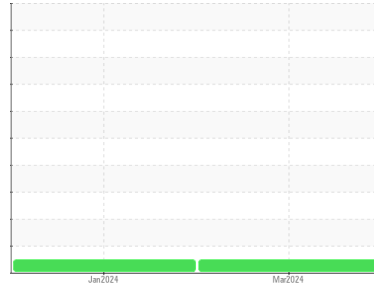

Machine Id  
**PETERBILT V61**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0112107</b>	PCA0112128	---
Sample Date	Client Info			<b>02 Mar 2024</b>	26 Jan 2024	---
Machine Age	mls	Client Info		<b>363968</b>	360107	---
Oil Age	mls	Client Info		<b>24628</b>	20767	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>6</b>	40	---
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>3</b>	2	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	10	---
Lead	ppm	ASTM D5185m	>45	<b>0</b>	1	---
Copper	ppm	ASTM D5185m	>85	<b>&lt;1</b>	2	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>22</b>	6	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>57</b>	56	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>892</b>	902	---
Calcium	ppm	ASTM D5185m		<b>1099</b>	1287	---
Phosphorus	ppm	ASTM D5185m		<b>935</b>	1035	---
Zinc	ppm	ASTM D5185m		<b>1156</b>	1225	---
Sulfur	ppm	ASTM D5185m		<b>3146</b>	2985	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>5</b>	15	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	7	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.0</b>	9.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.0</b>	20.7	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.2</b>	15.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.7</b>	6.3	---





# OIL ANALYSIS REPORT

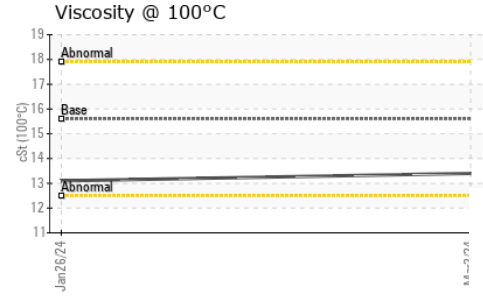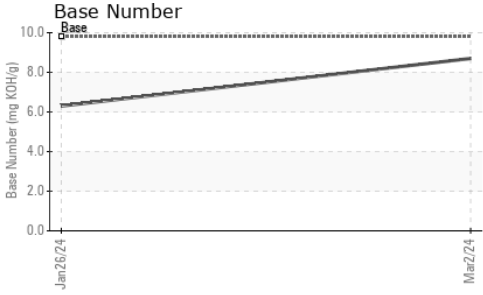

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.4</b>	13.1	---

## GRAPHS

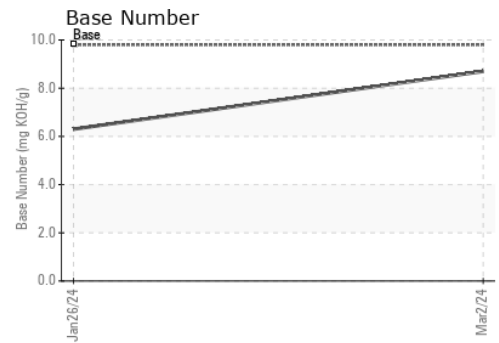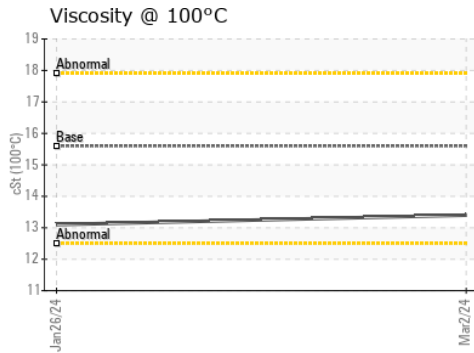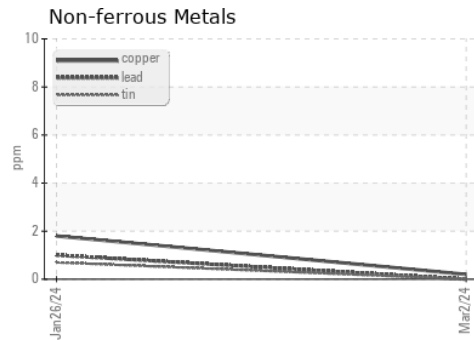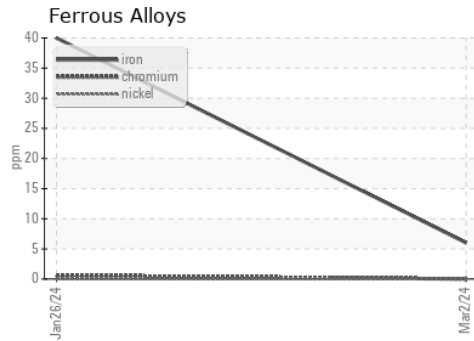

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112107      **Received** : 07 Mar 2024  
**Lab Number** : **06111843**      **Tested** : 08 Mar 2024  
**Unique Number** : 10915340      **Diagnosed** : 08 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**VOYAGER TRUCKING CORP**  
 451 FRELINGHUYSEN AVENUE  
 NEWARK, NJ  
 US 07114  
 Contact: MIKE EMERY  
 memery@voyagertrucking.com  
 T: (973)589-3444  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)